

TILLMAN, FLORIDA CONSTRUCTION DRAWING

PERMITTING
AGENCY

CITY OF
DELTONA

SCALE: NONE


CONSTRUCTION DWG.

DRAWING INDEX	
SHEET NUMBER	SHEET TITLE
01	COVER SHEET
02	LEGENDS & REVISION LOG
03	NOTES
04	HEXATRONIC METHODS
05-13	LAYOUT PRINTS
5B-5C	SPLICE DETAILS
14-20	BORE PROFILES
21	FDH DETAILS
22	TYPICAL HH DETAILS
23	TOBY BOX DETAILS
24	TYPICAL BORE DETAIL
25	BILL OF MATERIALS

FIBER CORE UNIT (FCU)	
ITEMS	QUANTITY
D-BORE UP TO 2.5" DIA	4768'
D-BORE 2.5"-3.5" DIA	321'
D-BORE 3.5"-4.5" DIA	718'
D-BORE 4.5"-7.0" DIA	00'
HAND DIG 24"-36" COVER	515'
HEX-1-WAY	00'
HEX-2-WAY	1568'
HEX-12-WAY	2202'
HEX-24-WAY	3591'
12 STINGRAY	1133'
TOBY BOX	52
SPLICE DAP	70

MATERIAL LIST	
ITEMS	QUANTITY
TOTAL UG FOOTAGE	6322'
30"X48"X36" HH	01
FDH SWING ARM-96	01
GROUND ROD	01
SPLITTER-1X32	01

CONTACT LIST	
FLORIDA POWER & LIGHT	(800) 266-3545
DUKE ENERGY	(800) 653-5307
DELTONA WATER COMPANY	(386) 575-6800
GAS	(800) 427-7712

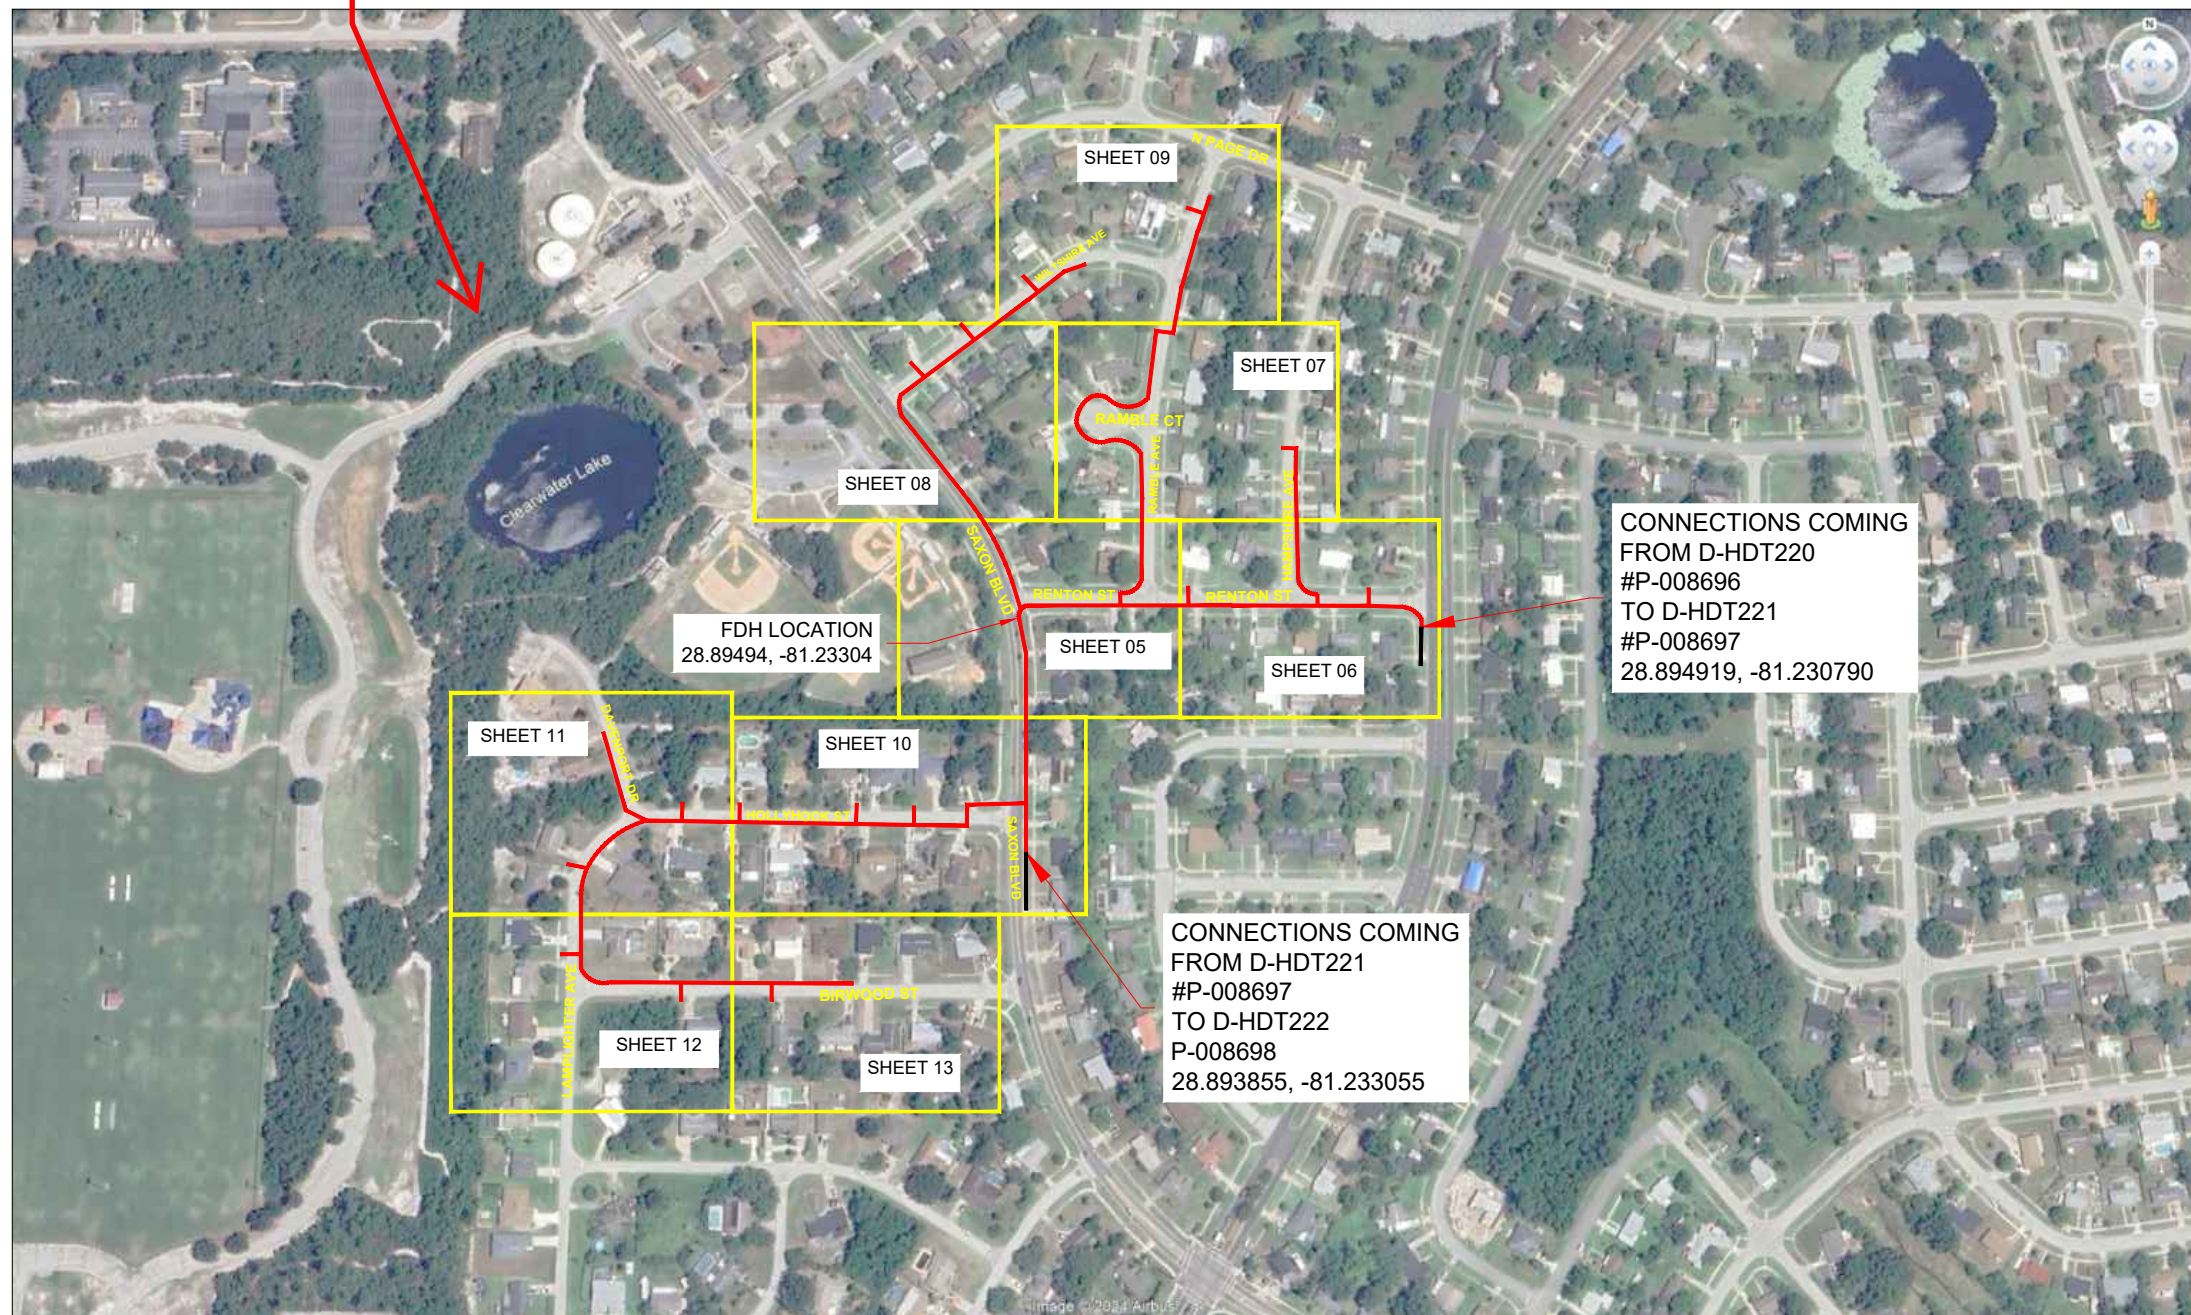

CONNECTIONS COMING
FROM D-HDT220
#P-008696
TO D-HDT221
#P-008697
28.894919, -81.230790

CONNECTIONS COMING
FROM D-HDT221
#P-008697
TO D-HDT222
P-008698
28.893855, -81.233055

VICINITY MAP

1131 SAXON BLVD, DELTONA, FL 32725, USA

EXCAVATION DATA

PROPOSED UTILITY	DIRT
(81) 4'X4' PIT	1296 SQ. FT.
(1) 30"X48"X36"HH	10 SQ. FT.

TFC PROJECT # P-008697
OLT-VLSA2817



CALL 811 BEFORE YOU DIG.
FLORIDA TOLL FREE
800-432-4770



**Tillman FiberCo.
Florida, LLC**



EXISTING UTILITIES SHOWN ARE APPROXIMATE ONLY AND BASED ON AVAILABLE RECORDS AND FIELD OBSERVATIONS. CONTRACTOR IS RESPONSIBLE FOR CALLING 811 AT LEAST 48 HOURS PRIOR TO ANY EXCAVATION. CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS TO PROTECT EXISTING UTILITIES AND ANY DAMAGE TO THE UTILITIES SHALL BE IMMEDIATELY REPAIRED AT THE CONTRACTOR'S EXPENSE.

REVISION DATA

REVISION DATA		
REV 000 000	REV 000 000 000	
REV 000 000	REV 000 000 000	
REV 000 000	REV 000 000 000	
REV 000 000	REV 000 000 000	

PROJECT NAME : D-HDT221

DRAWN BY: MASTEC

SHEET 01

GENERAL ABBREVIATIONS & LEGENDS

CITY REVISION LOG

PERMITTING
AGENCY

CITY OF
DELTONA

SCALE: NONE

CONSTRUCTION DWG.

R/W	RIGHT OF WAY		EXISTING PEDESTAL		EXISTING HANDHOLE
S/W	SIDEWALK				
C/L	CENTER LINE		EXISTING CABINET		STREET SIGN
CSW	CONCRETE SIDEWALK				
PKWY	PARKWAY		EXISTING MANHOLE		STREET LIGHT
DWY	DRIVEWAY		TCBDB2 - Bore and Place Hex-24-Way (")		TREE
FOC	FACE OF CURB		SEWER MANHOLE		SIDEWALK
BOC	BACK OF CURB				
EOC	EDGE OF CURB		STORM DRAIN MANHOLE		PROPOSED HANDHOLE
EOP	EDGE OF PAVEMENT				
ETW	ETW LINE		CATCH BASIN		PROPOSED CABINET
HH	HANDHOLE		GAS VALVE		PROPOSED FDH HANDHOLE
MH	MANHOLE				
N.T.S.	NOT TO SCALE		POTABLE WATER VALVE		PROPOSED CABINET POWER METER
CONC	CONCRETE		RECLAIMED WATER VALVE		PROPOSED ANCHOR
PED	PEDESTAL (UTILITY)				
PVC	POLYVINYL CHLORIDE		VALVE		SPLITTER
P/L	PROPERTY LINE		POWER TRANSFORMER		ANCHOR
RR	RAILROAD				
SL	STREET LIGHT		FIRE HYDRANT		BORE PIT
W-BLDG	WALL TO BUILDING		EXISTING POLE		TOBY BOX
W-P	WALL TO POLE		STEEL POLE		DAP (HAND DIG)
W-W	WALL TO WALL				
U/E	UTILITY EASEMENT		CONCRETE POLE		GROUND ROD
SD	STORM DRAIN				
TS	TRAFFIC SIGNAL		WATER METER		

[illegible]

CALL 811 BEFORE YOU DIG.
FLORIDA TOLL FREE
800-432-4770



**Tillman FiberCo.
Florida, LLC**



EXISTING UTILITIES SHOWN ARE APPROXIMATE ONLY AND BASED ON AVAILABLE RECORDS AND FIELD OBSERVATIONS. CONTRACTOR IS RESPONSIBLE FOR CALLING 811 AT LEAST 48 HOURS PRIOR TO ANY EXCAVATION. CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS TO PROTECT EXISTING UTILITIES AND ANY DAMAGE TO THE UTILITIES SHALL BE IMMEDIATELY REPAIRED AT THE CONTRACTOR'S EXPENSE.

REVISION DATA		
0000-0000-0000	0000-0000-0000-0000-0000	
0000-0000-0000	0000-0000-0000-0000-0000	
0000-0000-0000	0000-0000-0000-0000-0000	
0000-0000-0000	0000-0000-0000-0000-0000	
0000-0000-0000	0000-0000-0000-0000-0000	

PROJECT NAME : D-HDT221

DRAWN BY: MASTEC

SHEET 02

	PROPERTY LINE		POTABLE WATER
	RIGHT OF WAY		STORM DRAIN
	CENTER LINE		GAS
	BOC		TRAFFIC
	EOP		SEWER
	FACE OF CURB		TELCO
	FENCE		POWER/ELECTRIC
	BORE		RECLAIMED WATER
	TRENCH		EXISTING DUCT

NOTES		PERMITTING AGENCY CITY OF DELTONA															
PLAN SHEET DISCLAIMER: 1. EVERY REASONABLE EFFORT TCBDB2 - Bore and Place Hex-24-Way (') Hex-12-Way (') 2. IN AN EFFORT TO INCREASE QUALITY OF THE PLANS, EXISTING UNDERGROUND UTILITIES WILL NOT BE SHOWN UNLESS THERE IS PROPOSED WORK THAT WILL REQUIRE EXCAVATION OR ANY OTHER EARTH DISTURBING ACTIVITY. IF PROPOSED WORK WILL REQUIRE THIS TYPE OF ACTIVITY. EXISTING UNDERGROUND UTILITIES WILL BE PROPERLY INVESTIGATED AND REPRESENTED ON THE PLAN SHEET OF THE RESPECTIVE WORK LOCATION UTILITIES: 1. THE IDENTITY AND LOCATION OF EXISTING UNDERGROUND UTILITIES LOCATED IN AND AROUND THE CONSTRUCTION AREA HAVE BEEN SHOWN AND LABELED ON THE PLANS BY USING INFORMATION PROVIDED BY THE RESPECTIVE UTILITY OWNERS. 2. SUPPORT AND PROTECTION OF ALL UTILITIES AND APPURTENANCES SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR. COSTS FOR THE REPAIR AND RESTORATION OF EXISTING UTILITIES DAMAGED BY THE CONTRACTOR SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR. 3. CALL 811 BEFORE YOU DIG. AT LEAST 48 HOURS PRIOR TO EXCAVATION. WORK LIMITS: 1. THE WORK LIMITS SHOWN ON THESE PLANS ARE FOR PHYSICAL CONSTRUCTION ONLY. THE INSTALLATION AND OPERATION OF ALL TEMPORARY TRAFFIC CONTROL AND TEMPORARY TRAFFIC CONTROL DEVICES REQUIRED BY THESE PLANS SHALL BE PROVIDED BY THE CONTRACTOR WHETHER INSIDE OR OUTSIDE OF THESE WORK LIMITS. MAINTAIN DRAINAGE: 1. THE CONTRACTOR AT HIS OWN EXPENSE, SHALL MAINTAIN THE FLOW IN ALL SEWERS, DRAINS, FIELD TILES, AND WATERCOURSES ENCOUNTERED IN AND AROUND THE PROJECT SITE. IF SUCH WATERCOURSES OR DRAINS ARE DISTURBED OR DESTROYED DURING THE EXECUTION OF THE PROJECT, THEY SHALL BE RESTORED BY THE CONTRACTOR AT HIS OWN EXPENSE TO A CONDITION SATISFACTORY TO THE ENGINEER. SECURING EXCAVATIONS & TRENCHES FOR NON-WORKING HOURS: 1. EXCAVATIONS AND TRENCHES SHALL BE SECURELY PLATED OR BACKFILLED DURING NON-WORKING HOURS. EXCAVATION OF ROADWAY AND RIGHT-OF-WAY AREAS: 1. ANY CONTRACTOR PERFORMING EXCAVATION, INCLUDING BUT NOT LIMITED TO DISTURBING THE EARTH WTH POWERED OR NON-POWERED EQUIPMENT, DRILLING AND/OR BORING, SHALL CAUSE NOTICE TO BE GIVEN BY CALLING 811 AT LEAST 48 HOURS BUT NOT MORE THAN 10 WORKING DAYS BEFORE EXCAVATING. 2. THE EXCAVATOR SHALL PROTECT AND PRESERVE THE MARKINGS UNTIL THOSE MARKINGS ARE NO LONGER NEEDED. IF AN EXCAVATION WILL COVER A LARGE AREA AND/OR PROGRESS FROM ONE AREA TO THE NEXT OVER A PERIOD OF TIME. THE EXCAVATOR SHALL COORDINATE THE MARKING OF APPROXIMATE LOCATIONS OF CITY OWNED FACILITIES WITH THE ACTUAL EXCAVATION. 3. THE CONTRACTOR IS RESPONSIBLE FOR LOCATING ALL CUSTOMER OWNED SERVICE LINES/LATERALS. THE CONTRACTOR SHALL FIELD VERIFY THE HORIZONTAL AND VERTICAL LOCATION OF ANY CITY OR CUSTOMER OWNED MAIN OR SERVICE LINE/LATERALS THAT MAY BE AFFECTED BY THE PROPOSED CONSTRUCTION ACTIVITIES. FIELD VERIFICATION SHALL TAKE PLACE PRIOR TO ANY ACTIVITY THAT MAY JEOPARDIZE THE INTEGRITY OF THE FACILITY AND AT A LOCATION NEAREST THE POINT OF POSSIBLE CONFLICT. 4. ANY DAMAGES TO CITY OR CUSTOMER OWNED FACILITIES SHOULD FIRST BE REPORTED TO THE UTILITY OWNER THEN IMMEDIATELY NOTIFY THE PROJECT ENGINEER. SAFETY NOTES: 1. CHECK IN WITH CONSTRUCTION SUPERVISOR WHEN ARRIVING ON-SITE. 2. HEAVY CONSTRUCTION EQUIPMENT IN USE. BEWARE OF SURROUNDINGS. 3. FOLLOW TILLMAN SAFETY POLICIES AND GUIDELINES AT ALL TIMES WHILE WORKING. 4. CONSTRUCTION ZONE/HARD HAT, SAFETY GLASSES, REFLECTIVE VEST/SHIRT, SAFETY TOE BOOTS REQUIRED - WORK SAFELY. GENERAL CONSTRUCTION NOTES: 1. A MINIMUM HORIZONTAL CLEARANCE OF 3-FEET AND A MINIMUM VERTICAL CLEARANCE OF 24" SHALL BE MAINTAINED BETWEEN THE PROPOSED FACILITY AND ALL EXISTING UTILITIES. (THESE MINIMUM CLEARANCES SHALL ALSO APPLY WHEN LOCATING HAND HOLES, CABINETS, POLES OR OTHER SURFACE FEATURES AND IN NO CASE SHALL A HAND HOLE, CABINET, POLE OR OTHER PROPOSED SURFACE FEATURE BE LOCATED OVER EXISTING UNDERGROUND INFRASTRUCTURE). 2. THE MINIMUM DEPTH FOR FACILITIES PLACED WITHIN THE ROADWAY IS 30" MIN WHEN PARALLELING THE ROAD, AND 36"MIN WHEN CROSSING THE ROAD. 3. THE WORK WILL COMPLY WITH ALL CITY, STATE, & FEDERAL REGULATIONS AND GUIDELINES. 4. SOD NOT SEED IS TO BE USED TO RESTORE RIGHT OF WAY. 5. SIDEWALKS ARE TO BE REPLACED IN FULL PANELS IF DISTURBED. (HANDHOLES SHALL NOT BE PLACED WITHIN SIDEWALK UNLESS ABSOLUTELY NECESSARY). 6. DAMAGE TO CITY UTILITY SYSTEMS (SANITARY SEWER, STORM SEWER, POTABLE WATER, RECLAIMED WATER) SHALL BE IMMEDIATELY REPORTED BY CONTACTING THE CITY'S EMERGENCY DISPATCH (PHONE 386-775-5400) AND DAMAGE TO CITY UTILITY SYSTEMS AND ALL OTHER PROVIDER OWNED UTILITY SYSTEMS OR PRIVATELY-OWNED PROPERTY SHALL BE IMMEDIATELY REPORTED TO THE CITY ENGINEERING CONSTRUCTION INSPECTOR (PHONE 386-878-8740) ASSIGNED TO THE PROJECT AND TO THE OWNER OF THE DAMAGED FACILITY.		SCALE: NONE CONSTRUCTION DWG.															
		811 Know what's below. Call before you dig. CALL 811 BEFORE YOU DIG. FLORIDA TOLL FREE 800-432-4770 Tillman FiberCo. Florida, LLC MasTec Communications Group EXISTING UTILITIES SHOWN ARE APPROXIMATE ONLY AND BASED ON AVAILABLE RECORDS AND FIELD OBSERVATIONS. CONTRACTOR IS RESPONSIBLE FOR CALLING 811 AT LEAST 48 HOURS PRIOR TO ANY EXCAVATION. CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS TO PROTECT EXISTING UTILITIES AND ANY DAMAGE TO THE UTILITIES SHALL BE IMMEDIATELY REPAIRED AT THE CONTRACTOR'S EXPENSE. REVISION DATA <table><tr><td>----</td><td>-----</td><td></td></tr><tr><td>----</td><td>-----</td><td></td></tr><tr><td>----</td><td>-----</td><td></td></tr><tr><td>----</td><td>-----</td><td></td></tr></table> PROJECT NAME : D-HDT221 <table><tr><td>DRAWN BY: MASTEC</td><td>SHEET 03</td></tr></table>		----	-----		----	-----		----	-----		----	-----		DRAWN BY: MASTEC	SHEET 03
----	-----																
----	-----																
----	-----																
----	-----																
DRAWN BY: MASTEC	SHEET 03																

HEXATRONIC METHODS (1,2,12 & 24 WAYS)


**PERMITTING
AGENCY**

CITY OF
DELTONA


SCALE: NONE

CONSTRUCTION DWG.


HEX-1-WAY




HEX-2-WAY



HEX-12-WAY

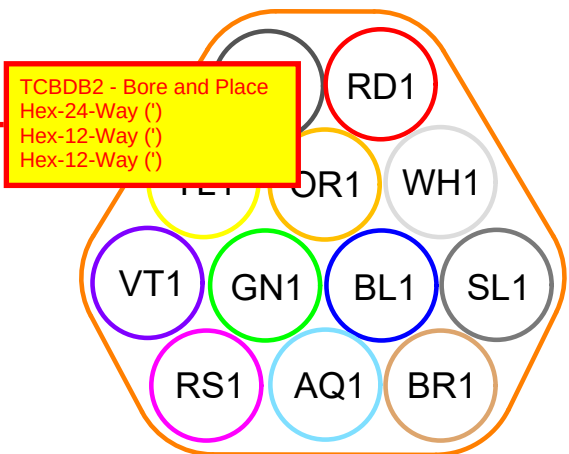

HEX-24-WAY

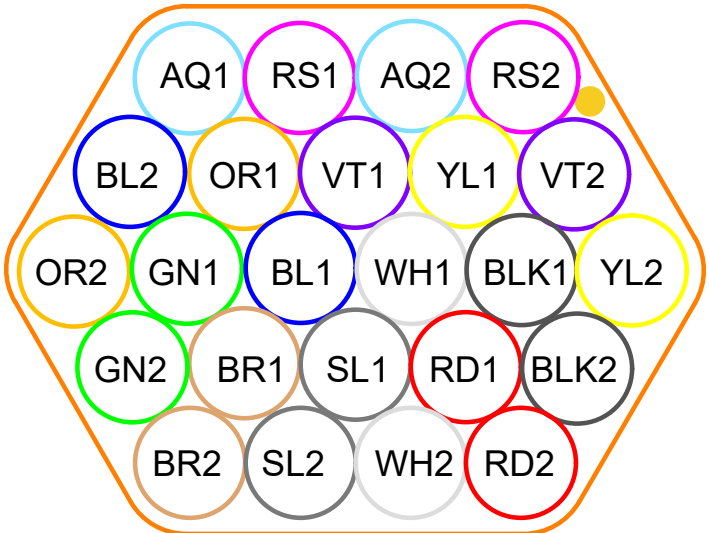

HEXATRONIC MICRODUCT BANK OUTER DIAMETER



CALL 811 BEFORE YOU DIG.
FLORIDA TOLL FREE
800-432-4770



Tillman FiberCo.
Florida, LLC



EXISTING UTILITIES SHOWN ARE APPROXIMATE ONLY AND BASED ON AVAILABLE RECORDS AND FIELD OBSERVATIONS. CONTRACTOR IS RESPONSIBLE FOR CALLING 811 AT LEAST 48 HOURS PRIOR TO ANY EXCAVATION. CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS TO PROTECT EXISTING UTILITIES AND ANY DAMAGE TO THE UTILITIES SHALL BE IMMEDIATELY REPAIRED AT THE CONTRACTOR'S EXPENSE.

REVISION DATA

----	-----	
----	-----	
----	-----	
----	-----	

PROJECT NAME : D-HDT221

DRAWN BY: MASTEC

SHEET 04


SINGLE MICRODUCT RUNS

MULTIPLE MICRODUCT RUNS

MICRODUCT TYPE	DIAMETER	MICRODUCT	DIAMETER
HEX-1-WAY	0'-0.250000"	(2) HEX-12-WAY	0'-2.362000"
HEX-2-WAY	0'-0.500000"	(1) HEX-12-WAY AND (1) HEX-24-WAY	0'-2.914000"
HEX-12-WAY	0'-1.181000"		
HEX-24-WAY	0'-1.733000"	(2) HEX-24-WAY	0'-3.466000"

- 1 PL. NEW (30"X48"X24")
HH#1 IN 4'X4' PIT,
STA.00+00
28.89492, -81.2330
- 2 PL. NEW SWING ARM-96
FDH IN NEW
(30"X48"X24") HH#1
28.89492, -81.2330
- 3 PL. NEW GROUND ROD
- 4 BORE & PLACE (40')
RT1-HEX-24-WAY
RT2-HEX-24-WAY
12SR IN RT1 FROM
D-HDT220
- 5 BORE & PLACE (160')
RT1-HEX-24-WAY
RT2-HEX-24-WAY
12SR IN RT1 FROM
D-HDT220
- 6 DIG 4'X4' PIT
DAP
STA.02+00
- 7 PL. NEW TOBY BOX IN 4'X4'
PIT SERVES 1463 & 1467
RENTON ST
28.89498, -81.23247
- 8 HAND DIG & PLACE (10')
RT2-HEX-2-WAY
- 9 BORE & PLACE (40')
RT2-HEX-24-WAY
- 10 DIG 4'X4' PIT
STA.02+40

FIBER CORE UNIT (FCU)	
ITEMS	QUANTITY
D-BORE UP TO 2.5" DIA	571'
D-BORE 2.5"-3.5" DIA	00'
D-BORE 3.5"-4.5" DIA	287'
D-BORE 4.5"-7.0" DIA	00'
HAND DIG 24"-36" COVER	24'
TOTAL UG FOOTAGE	882'
HEX-1-WAY	00'
HEX-2-WAY	24'
HEX-12-WAY	00'
HEX-24-WAY	1145'
12 STINGRAY	408'
TOBY BOX	4
SPLICE DAP	4

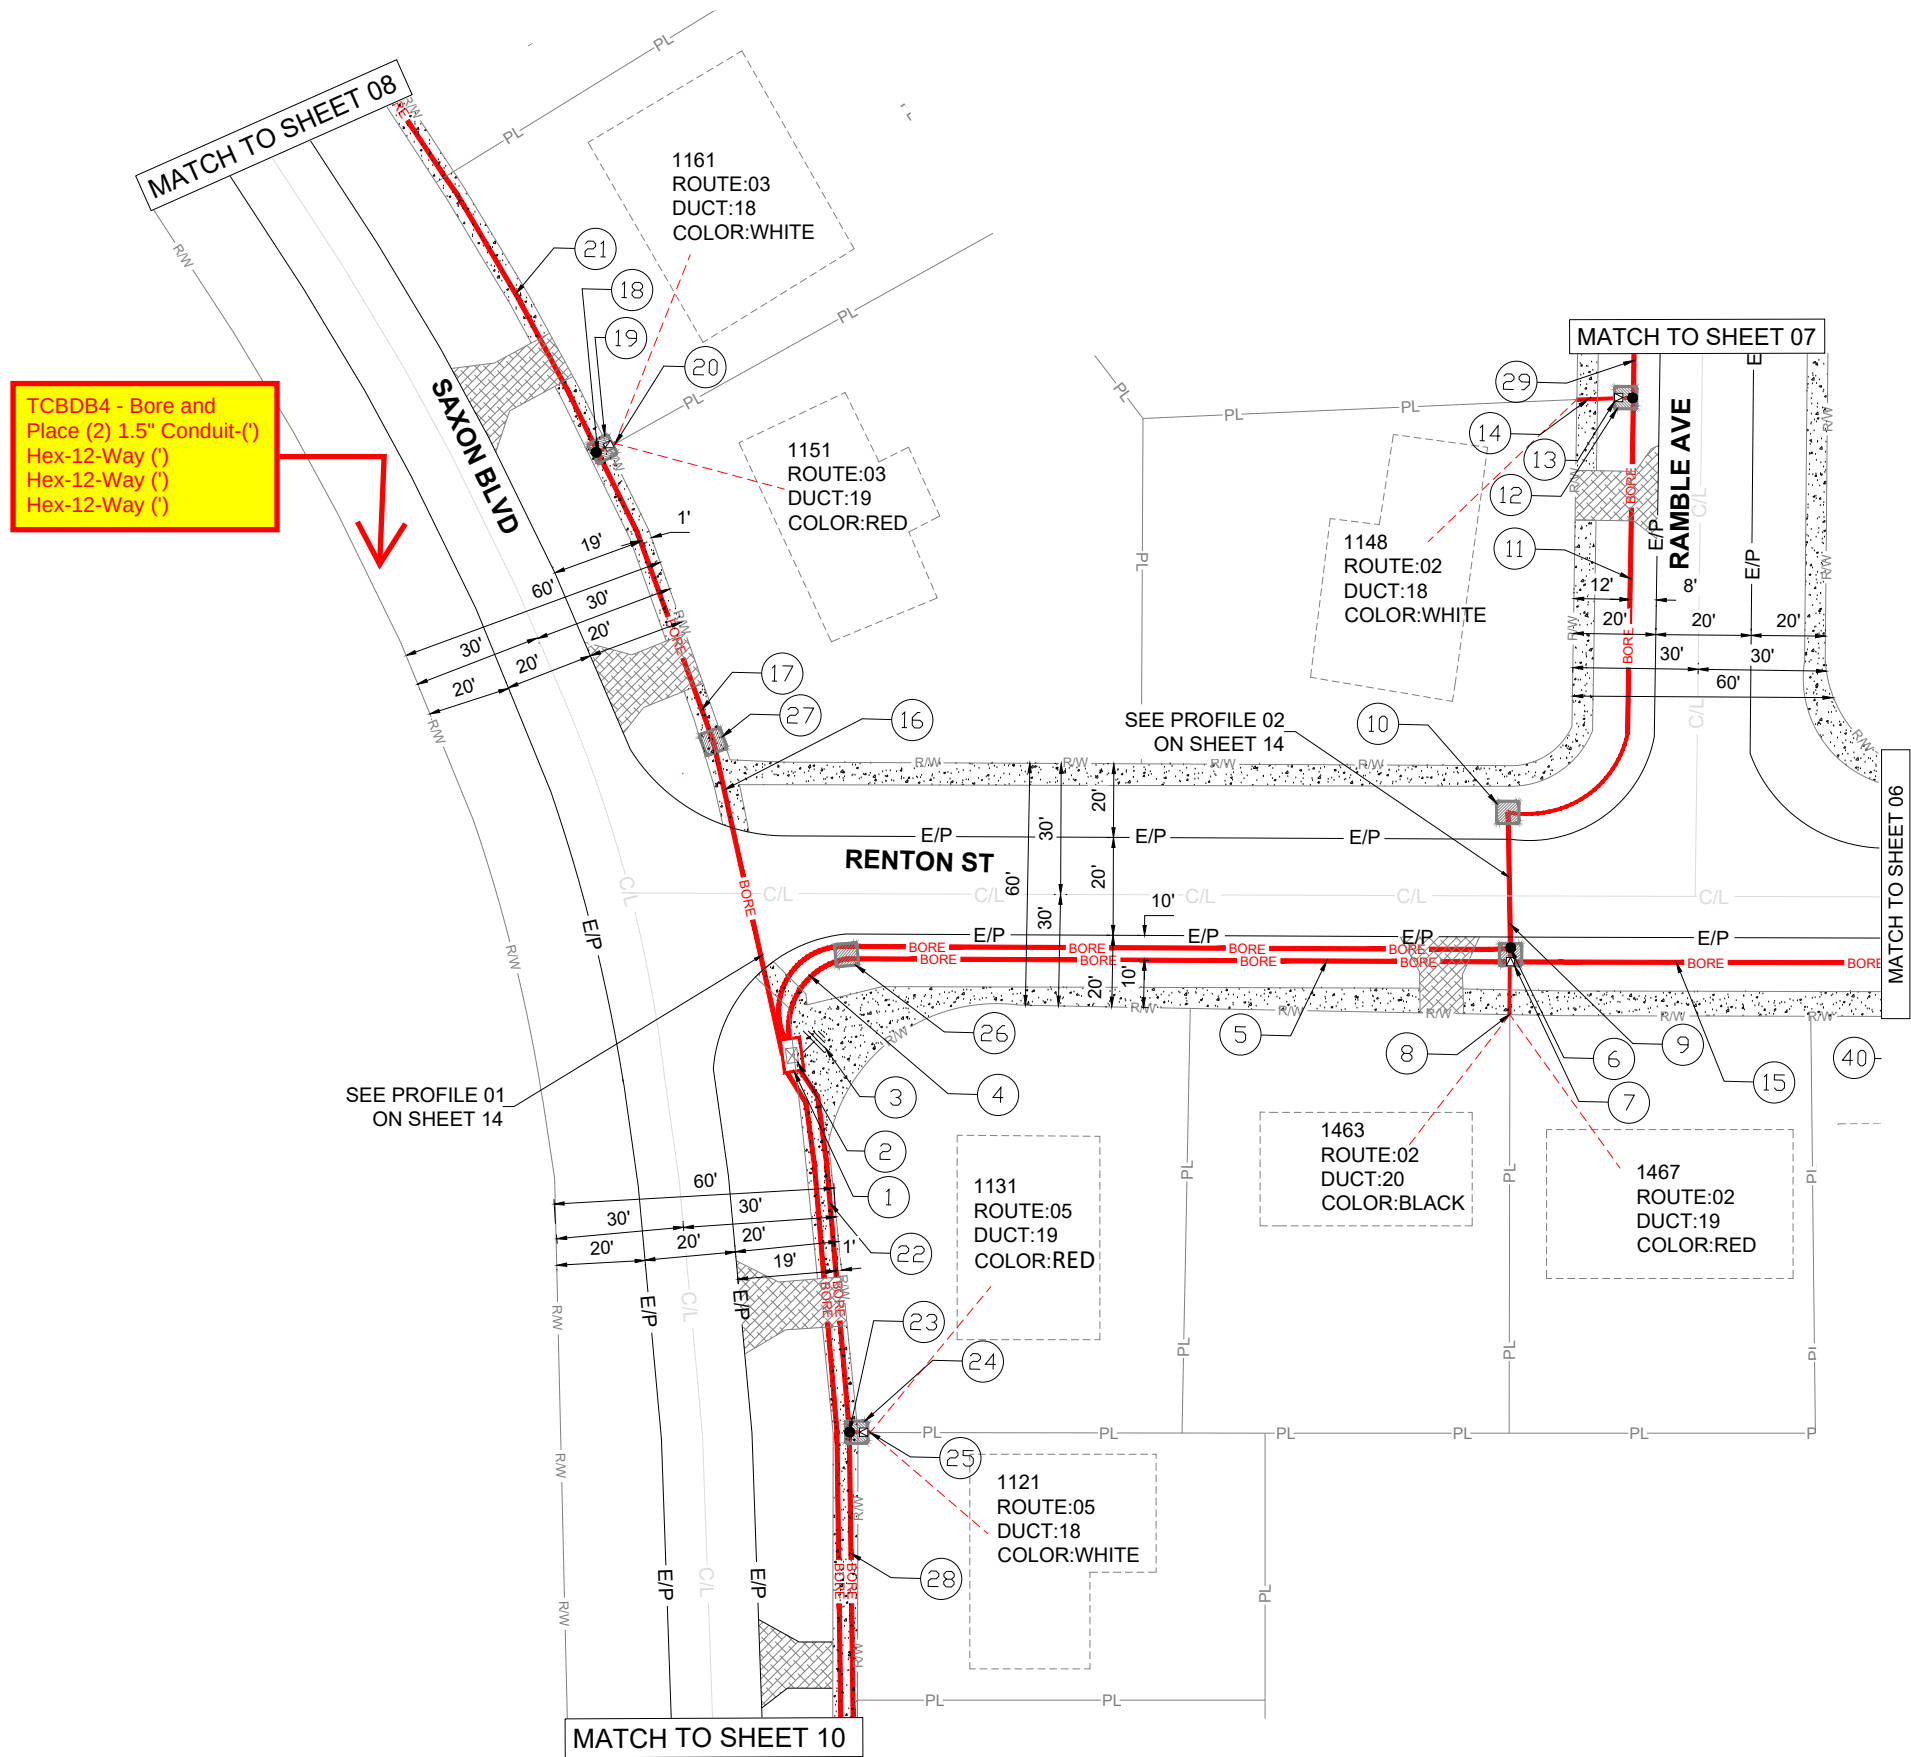

NOTE: CONTRACTOR SHALL REPLACE ALL SIDEWALKS, OR OTHER DISTURBED SURFACES TO A CONDITION EQUAL TO OR BETTER THAN THE PRIOR EXISTING CONDITIONS.

PERMITTING
AGENCY

CITY OF
DELTONA

SCALE: 1" : 40'

CONSTRUCTION DWG.

SEE SHEET 5(A) FOR
MORE NOTES.

EXCAVATION DATA

PROPOSED UTILITY	DIRT
(8) 4'X4' PIT	128 SQ. FT.
(1) 30"X48"X24" HH	10 SQ. FT.



CALL 811 BEFORE YOU DIG.
FLORIDA TOLL FREE
800-432-4770



Tillman FiberCo.
Florida, LLC

MasTec
Communications Group

EXISTING UTILITIES SHOWN ARE APPROXIMATE ONLY AND BASED ON AVAILABLE RECORDS AND FIELD OBSERVATIONS. CONTRACTOR IS RESPONSIBLE FOR CALLING 811 AT LEAST 48 HOURS PRIOR TO ANY EXCAVATION. CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS TO PROTECT EXISTING UTILITIES AND ANY DAMAGE TO THE UTILITIES SHALL BE IMMEDIATELY REPAIRED AT THE CONTRACTOR'S EXPENSE.

REVISION DATA

----	-----	
----	-----	
----	-----	
----	-----	

PROJECT NAME : D-HDT221

DRAWN BY: MASTEC

SHEET 05

ADDITIONAL NOTES (SEE SHEET 05)

- 11

BORE & PLACE (115')
RT2-HEX-24-WAY

12

DIG 4'X4' PIT
DAP
STA.03+55

13

PL. NEW TOBY BOX IN
PIT SERVES
1148 RAMBLE AVE
28.89525, -81.23241

14

HAND DIG & PLACE (12')
RT2-HEX-2-WAY

15

BORE & PLACE (121')
RT2-HEX-24-WAY
12SR IN RT1 FROM
D-HDT220

16

BORE & PLACE (72')
RT3-HEX-24-WAY

17

BORE & PLACE (75')
RT3-HEX-24-WAY

18

DIG 4'X4' PIT
DAP
STA.01+47

19

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1161 & 1151 SAXON BLVD
28.895342, -81.23325

20

HAND DIG & PLACE (1')
RT3-HEX-2-WAY

21

BORE & PLACE (148')
RT3-HEX-24-WAY

22

BORE & PLACE (87')
RT4-HEX-24-WAY
RT5-HEX-24-WAY
12SR IN RT5 TO
D-HDT222

23

DIG 4'X4' PIT
DAP
STA.00+87

24

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES1131 & 1121
SAXON BLVD
28.895342, -81.23325

25

HAND DIG & PLACE (1')
RT5-HEX-2-WAY


26

DIG 4'X4' PIT
DAP
STA.00+87

29

BORE & PLACE
SEE SHEET 7
- TCBDB4 - Bore and Place
Hex-12-Way (')
Hex-12-Way (')
Hex-12-Way (')
Conduit- 1.5" (')
-
- SEE SHEET 10
-
-
- PERMITTING
AGENCY
- CITY OF
DELTONA
- SCALE: NONE
- CONSTRUCTION DWG.
-
- CALL 811 BEFORE YOU DIG.
FLORIDA TOLL FREE
800-432-4770
-
- Tillman FiberCo.
Florida, LLC
-
- EXISTING UTILITIES SHOWN ARE APPROXIMATE ONLY AND BASED ON AVAILABLE RECORDS AND FIELD OBSERVATIONS. CONTRACTOR IS RESPONSIBLE FOR CALLING 811 AT LEAST 48 HOURS PRIOR TO ANY EXCAVATION. CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS TO PROTECT EXISTING UTILITIES AND ANY DAMAGE TO THE UTILITIES SHALL BE IMMEDIATELY REPAIRED AT THE CONTRACTOR'S EXPENSE.
- REVISION DATA
- | | | |
|------|-------|--|
| ---- | ----- | |
| ---- | ----- | |
| ---- | ----- | |
| ---- | ----- | |
- PROJECT NAME : D-HDT221
- DRAWN BY: MASTEC
- SHEET 05(A)

SPLICE DETAILS

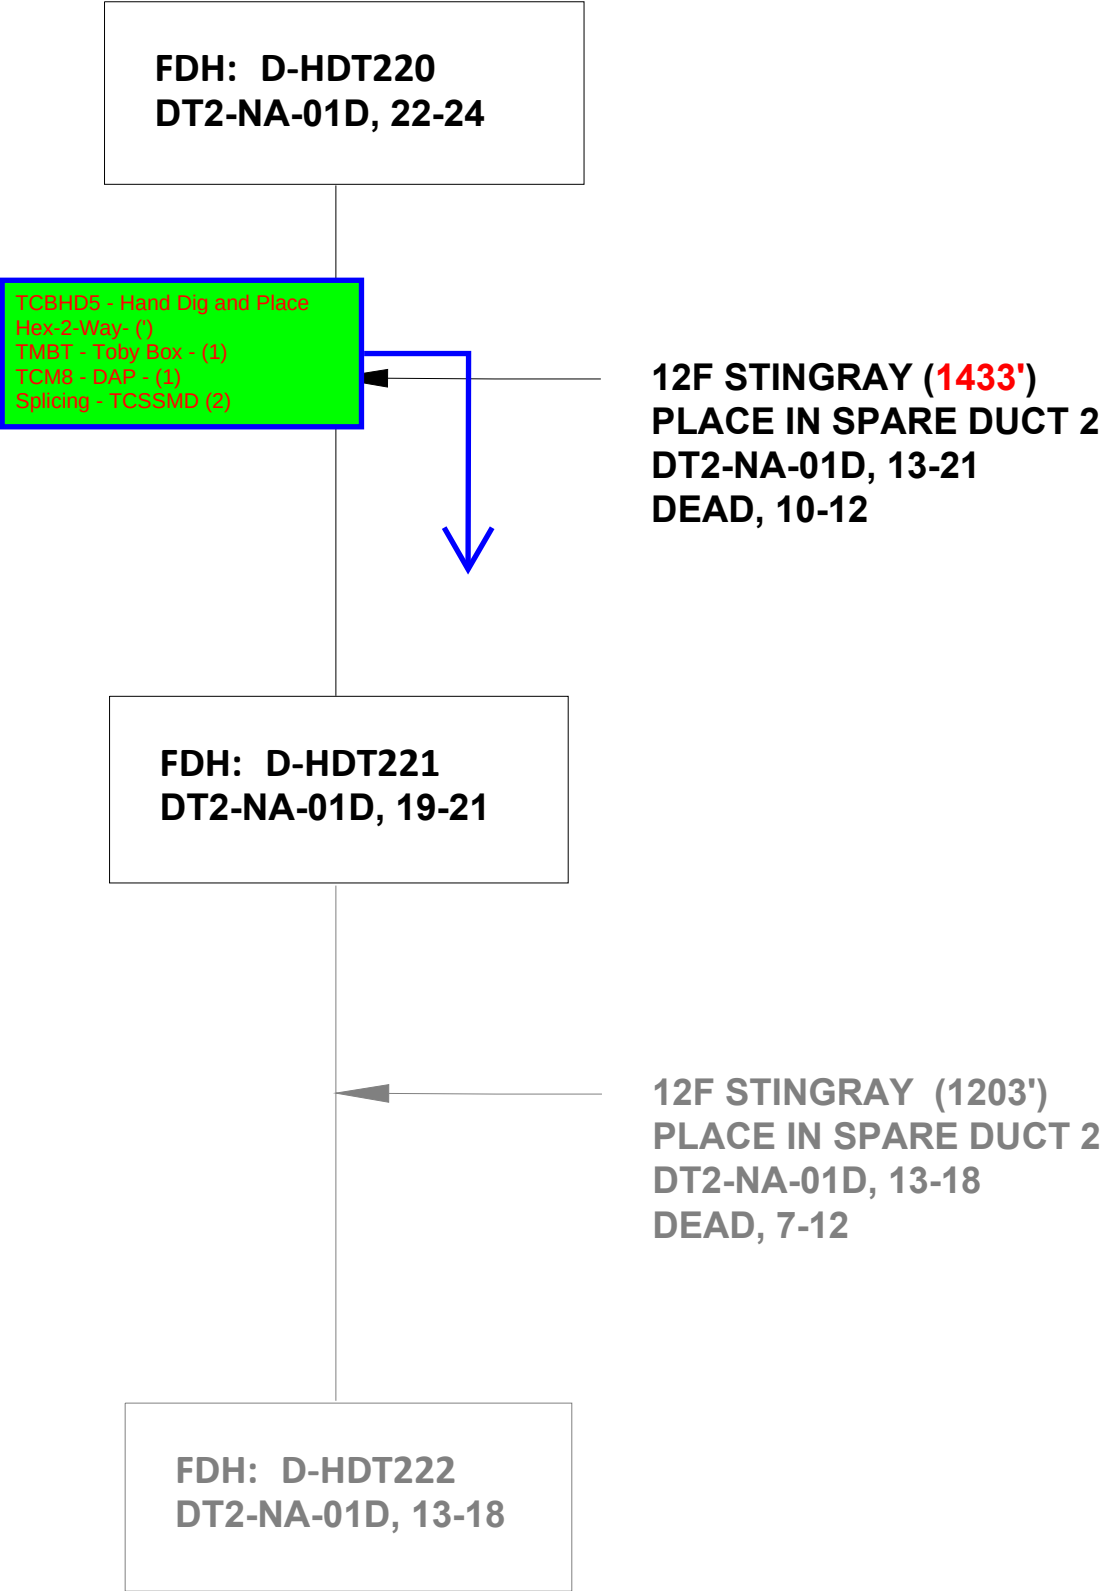

PERMITTING
AGENCY

CITY OF
DELTONA

SCALE: NONE

CONSTRUCTION DWG.

TFC PROJECT # P-008697
OLT-VLSA2817



CALL 811 BEFORE YOU DIG.
FLORIDA TOLL FREE
800-432-4770



Tillman FiberCo.
Florida, LLC



EXISTING UTILITIES SHOWN ARE APPROXIMATE ONLY AND BASED ON AVAILABLE RECORDS AND FIELD OBSERVATIONS. CONTRACTOR IS RESPONSIBLE FOR CALLING 811 AT LEAST 48 HOURS PRIOR TO ANY EXCAVATION. CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS TO PROTECT EXISTING UTILITIES AND ANY DAMAGE TO THE UTILITIES SHALL BE IMMEDIATELY REPAIRED AT THE CONTRACTOR'S EXPENSE.

REVISION DATA		
----	-----	
----	-----	
----	-----	
----	-----	
PROJECT NAME : D-HDT221		
DRAWN BY: MASTEC		SHEET 05(B)

SPLICE DETAILS

PERMITTING AGENCY

CITY OF DELTONA

SCALE: NONE


CONSTRUCTION DWG.

- PLACE **STINGRAY 12** FIBER FROM **D-HDT220** ON SHEET **10** TO **D-HDT221** ON SHEET **05**. TOTAL CABLE FTG: 1133'
- SPL FIBERS **12SR** DT2-NA-01D, 13-18 FROM **D-HDT221** ON SHEET **05** TO **D-HDT222** ON SHEET **06**

D-HDT220 -> 12SR DT2-NA-01D, 13-21 -> D-HDT221, 13-18 ->D-HDT222

TCMU4A - FDH (1)
TCMB3C - HH (24x36x24) - (1)
TCMB10 - Ground Wire- (3')
TCMB11 - Secondary Ground
Rod- (1)
Splicing - TCSSM (96)

LINEAR FTG: 1133'
COILS FTG: 0'
TOTAL CABLE FTG: 1133'

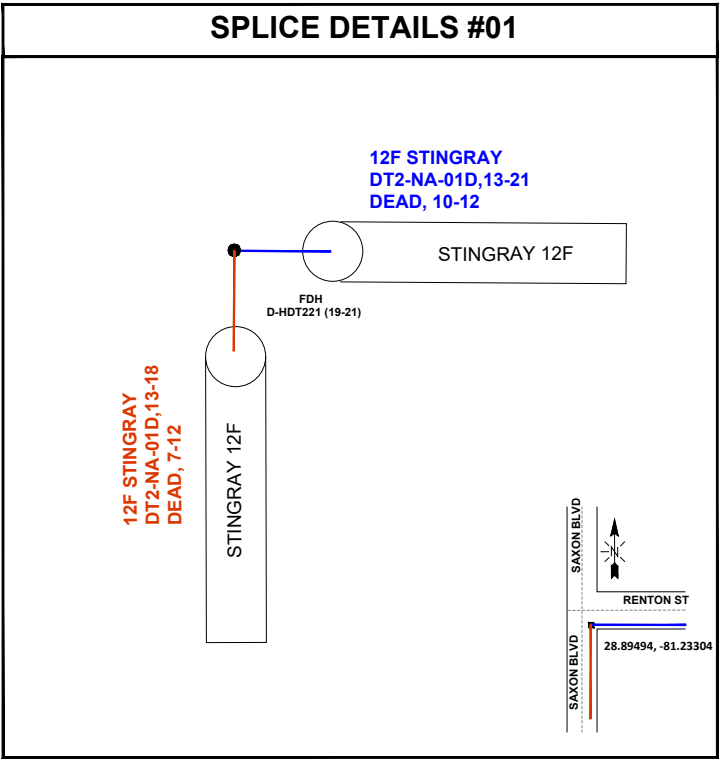

TFC PROJECT # P-008697
OLT-VLSA2817

 CALL 811 BEFORE YOU DIG.
FLORIDA TOLL FREE
800-432-4770






EXISTING UTILITIES SHOWN ARE APPROXIMATE ONLY AND BASED ON AVAILABLE RECORDS AND FIELD OBSERVATIONS. CONTRACTOR IS RESPONSIBLE FOR CALLING 811 AT LEAST 48 HOURS PRIOR TO ANY EXCAVATION. CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS TO PROTECT EXISTING UTILITIES AND ANY DAMAGE TO THE UTILITIES SHALL BE IMMEDIATELY REPAIRED AT THE CONTRACTOR'S EXPENSE.

REVISION DATA		
----	-----	
----	-----	
----	-----	
----	-----	

PROJECT NAME : D-HDT221

DRAWN BY: MASTEC	SHEET 05(C)
------------------	-------------

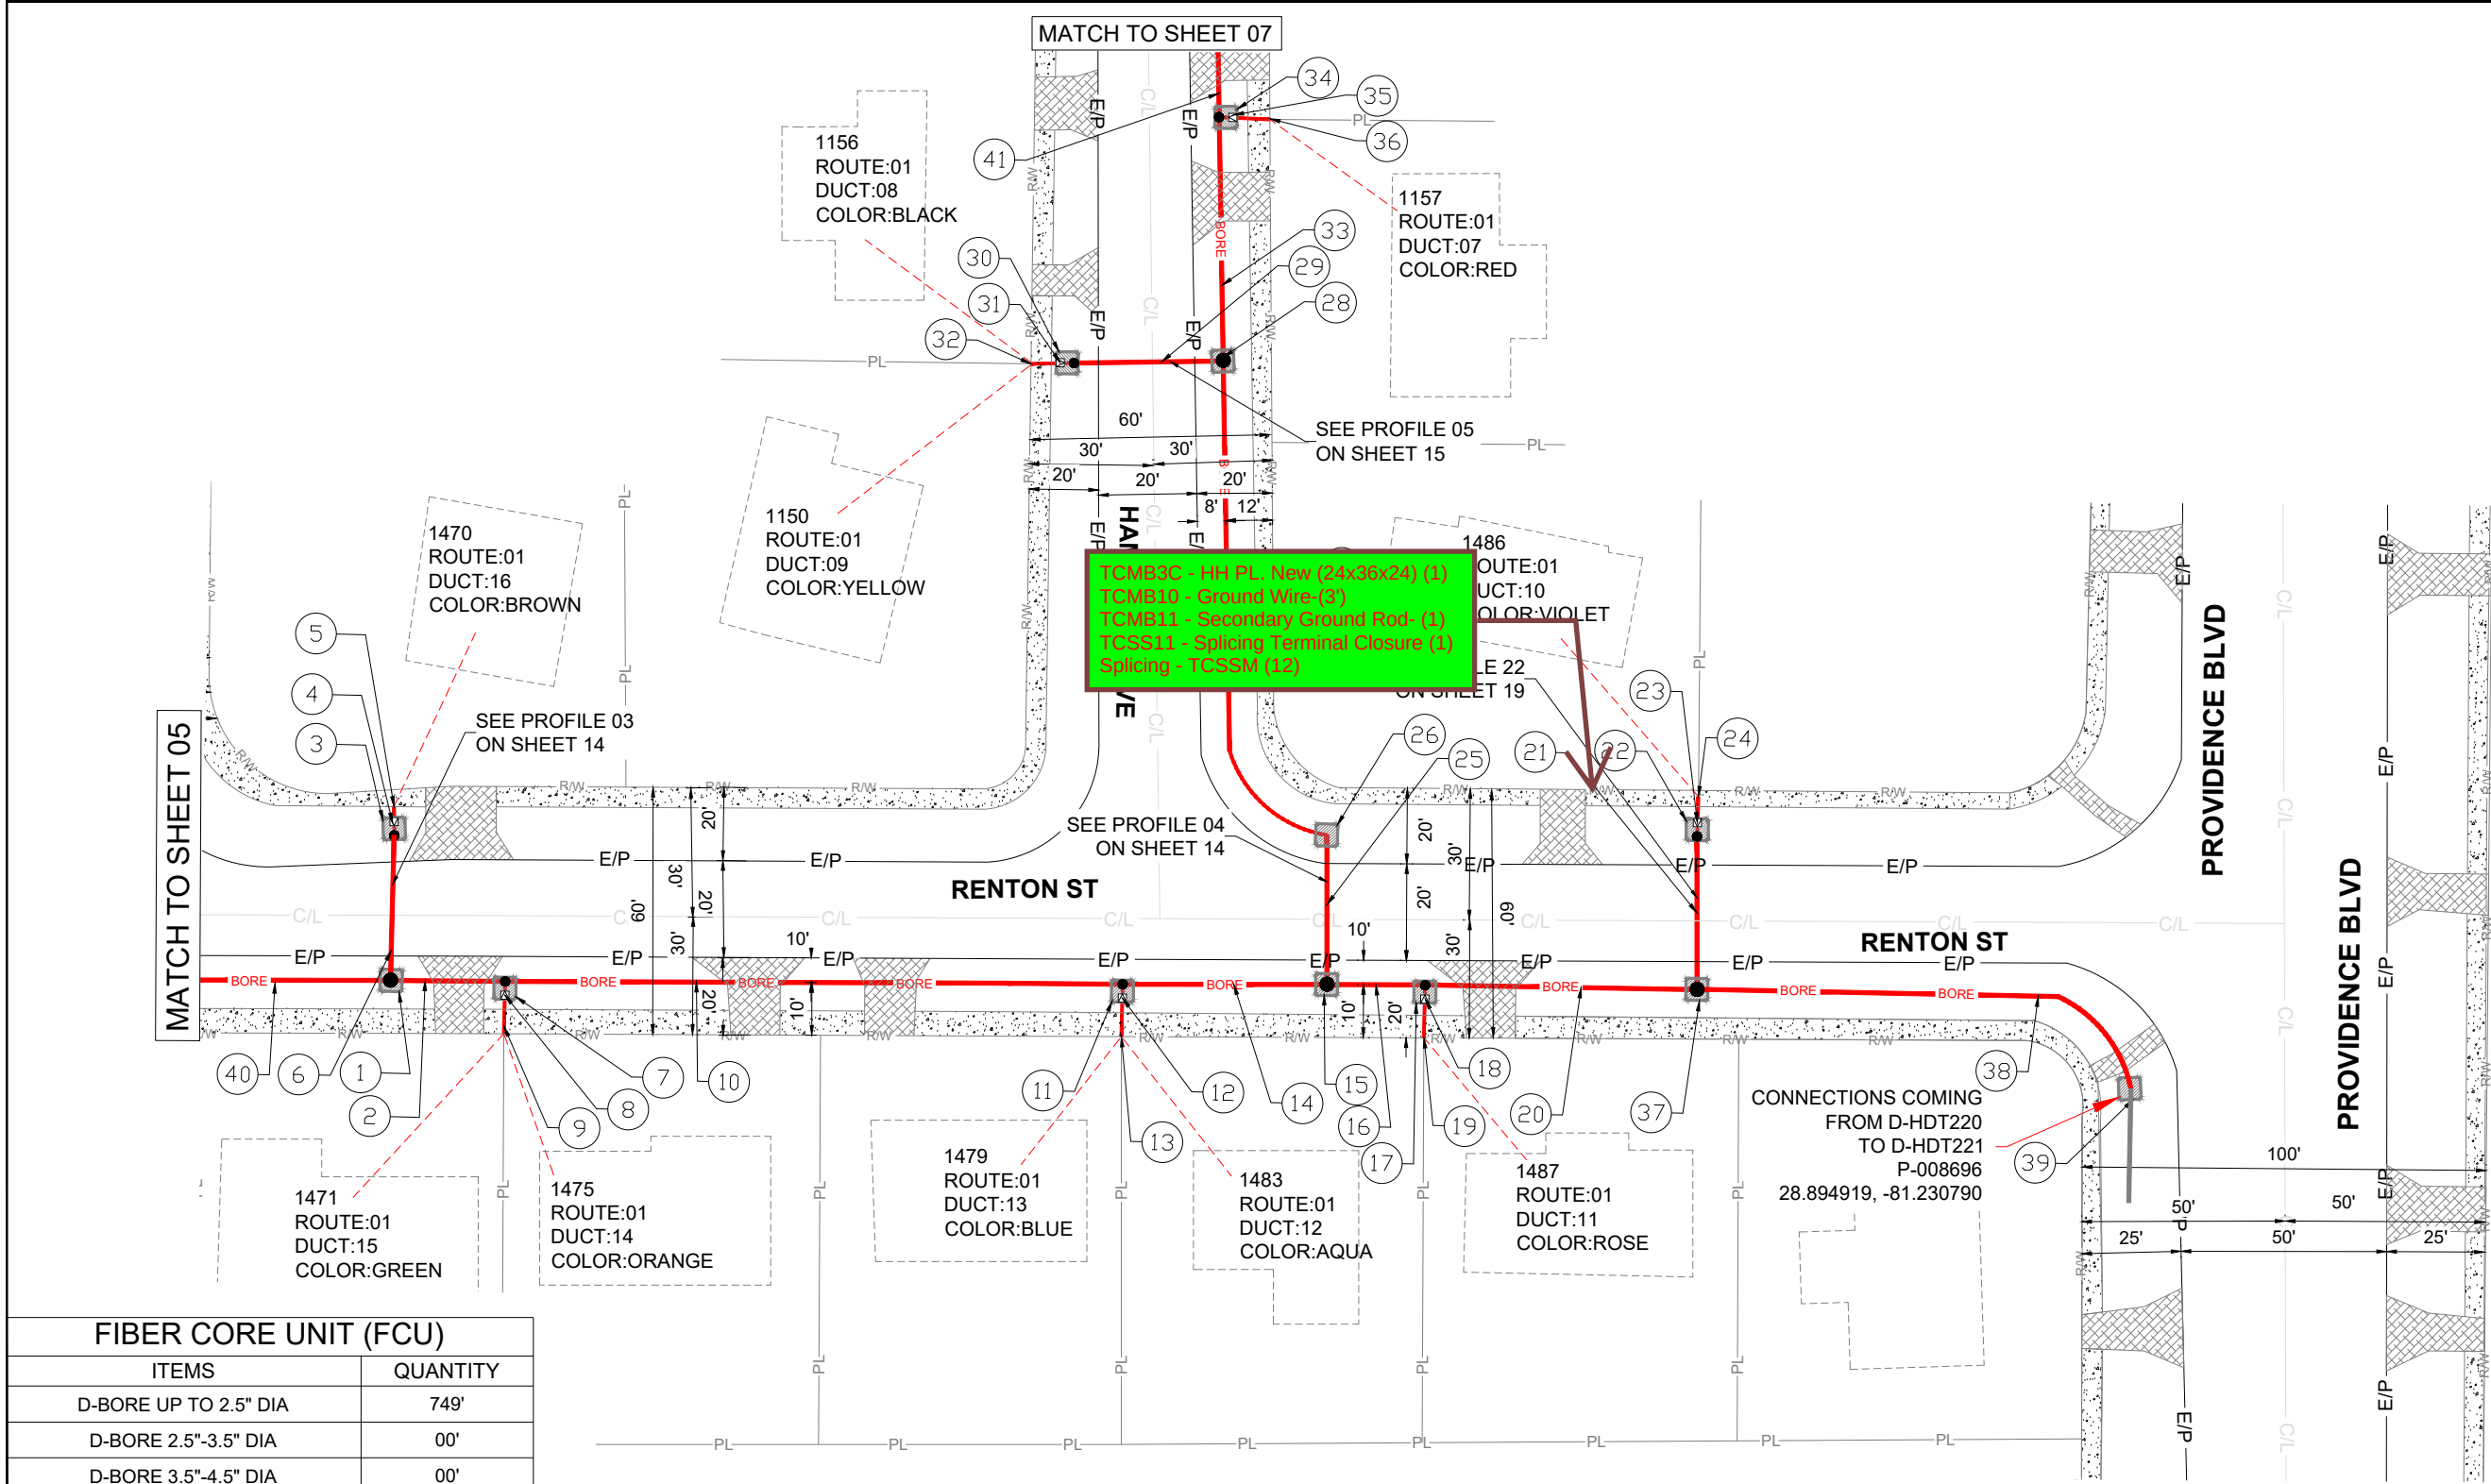

FIBER CORE UNIT (FCU)	
ITEMS	QUANTITY
D-BORE UP TO 2.5" DIA	749'
D-BORE 2.5"-3.5" DIA	00'
D-BORE 3.5"-4.5" DIA	00'
D-BORE 4.5"-7.0" DIA	00'
HAND DIG 24"-36" COVER	72'
TOTAL UG FOOTAGE	821'
HEX-1-WAY	00'
HEX-2-WAY	188'
HEX-12-WAY	404'
HEX-24-WAY	229'
12 STINGRAY	436'
TOBY BOX	7
SPLICE DAP	11

NOTE: CONTRACTOR SHALL REPLACE ALL SIDEWALKS, OR OTHER DISTURBED SURFACES TO A CONDITION EQUAL TO OR BETTER THAN THE PRIOR EXISTING CONDITIONS.

PERMITTING AGENCY

CITY OF DELTONA

SCALE: 1" = 40'

CONSTRUCTION DWG.

SEE SHEET 6(A) FOR MORE NOTES.

EXCAVATION DATA

PROPOSED UTILITY	DIRT
(12) 4'X4' PIT	192 SQ. FT.



CALL 811 BEFORE YOU DIG.
FLORIDA TOLL FREE
800-432-4770



Tillman FiberCo.
Florida, LLC



MasTec
Communications Group

EXISTING UTILITIES SHOWN ARE APPROXIMATE ONLY AND BASED ON AVAILABLE RECORDS AND FIELD OBSERVATIONS. CONTRACTOR IS RESPONSIBLE FOR CALLING 811 AT LEAST 48 HOURS PRIOR TO ANY EXCAVATION. CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS TO PROTECT EXISTING UTILITIES AND ANY DAMAGE TO THE UTILITIES SHALL BE IMMEDIATELY REPAIRED AT THE CONTRACTOR'S EXPENSE.

REVISION DATA

----	-----	
----	-----	
----	-----	
----	-----	

PROJECT NAME : D-HDT221

DRAWN BY: MASTEC

SHEET 06

ADDITIONAL NOTES (SEE SHEET 06)

- 1

DIG 4'X4' PIT
DAP
STA.03+21
- 2

BORE & PLACE (28')
RT1-HEX-24-WAY
12SR IN RT1 FROM
D-HDT220
- 3

DIG 4'X4' PIT
DAP
STA.03+61
- 4

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1470 RENTON ST
28.895090, -81.23211
- 5

HAND DIG & PLACE (10')
RT2-HEX-2-WAY
- 6

BORE & PLACE (40')
RT1-HEX-2-WAY
- 7

DIG 4'X4' PIT
DAP
STA.03+49
- 8

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1471 & 1475 RENTON ST
28.894995, -81.23205
- 9

HAND DIG & PLACE (10')
RT1-HEX-2-WAY
- 10

BORE & PLACE (152')
RT1-HEX-24-WAY
12SR IN RT1 FROM
D-HDT220
- 11

DIG 4'X4' PIT
DAP
STA.05+01
- 12

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1479 & 1483 RENTON ST
28.894975, -81.231622

13

HAND DIG & PLACE (10')
RT1-HEX-2-WAY

14

BORE & PLACE (49')
RT1-HEX-24-WAY
12SR IN RT1 FROM
D-HDT220

15

DIG 4'X4' PIT
DAP
STA.05+50

16

BORE & PLACE (23')
RT1-HEX-12-WAY
12SR IN RT1 FROM D-HDT220

17

DIG 4'X4' PIT
DAP
STA.05+73

18

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1487 RENTON ST
28.894988,-81.231341

19

HAND DIG & PLACE (10')
RT1-HEX-2-WAY

20

BORE & PLACE (66')
RT1-HEX-12-WAY
12SR IN RT1 FROM
D-HDT220

21

BORE & PLACE (40')
RT1-HEX-2-WAY

22

DIG 4'X4' PIT
DAP
STA.06+79

23

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1486 RENTON ST
28.895056,-81.231166

24

HAND DIG & PLACE (10')
RT1-HEX-2-WAY

25

BORE & PLACE (40')
RT1-HEX-12-WAY

26

DIG 4'X4' PIT
STA.05+90

27

BORE & PLACE (96')
RT1-HEX-12-WAY

28

DIG 4'X4' PIT
DAP
STA.07+18

29

BORE & PLACE (36')
RT1-HEX-2-WAY

30

DIG 4'X4' PIT
DAP
STA.07+54

31

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES 1156 & 1150
HAMPSHIRE AVE,
28.8953650, -81.2316511

32

HAND DIG & PLACE (10')
RT1-HEX-2-WAY

33

BORE & PLACE (61')
RT1-HEX-12-WAY

34

DIG 4'X4' PIT
DAP
STA.07+79

35

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1157 HAMPSHIRE AVE,
28.895482, -81.231504

36

HAND DIG & PLACE (12')
RT1-HEX-2-WAY

37

DIG 4'X4' PIT
DAP
STA.06+39

38

EXISTING DIG 4'X4' PIT
STA.07+57

39

BORE & PLACE (118')
RT4-HEX-12-WAY
12SR IN RT1 FROM
D-HDT220

40

BORE & PLACE
SEE SHEET 5

41

BORE & PLACE
SEE SHEET 7

PERMITTING
AGENCY

CITY OF
DELTONA

SCALE: NONE

CONSTRUCTION DWG.



CALL 811 BEFORE YOU DIG.
FLORIDA TOLL FREE
800-432-4770



Tillman FiberCo.
Florida, LLC




EXISTING UTILITIES SHOWN ARE APPROXIMATE ONLY AND BASED ON AVAILABLE RECORDS AND FIELD OBSERVATIONS. CONTRACTOR IS RESPONSIBLE FOR CALLING 811 AT LEAST 48 HOURS PRIOR TO ANY EXCAVATION. CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS TO PROTECT EXISTING UTILITIES AND ANY DAMAGE TO THE UTILITIES SHALL BE IMMEDIATELY REPAIRED AT THE CONTRACTOR'S EXPENSE.

REVISION DATA		
----	-----	
----	-----	
----	-----	
----	-----	
PROJECT NAME : D-HDT221		
DRAWN BY: MASTEC		SHEET 06(A)

- 1 BORE & PLACE (72')
RT2-HEX-24-WAY
- 2 DIG 4'X4' PIT
DAP
STA.04+27
- 3 PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1156 & 1160 RAMBLE AVE,
28.89559, -81.23242
- 4 HAND DIG & PLACE (12')
RT2-HEX-2-WAY
- 5 BORE & PLACE (22')
RT2-HEX-24-WAY
- 6 DIG 4'X4' PIT
DAP
STA.04+49
- 7 BORE & PLACE (36')
RT2-HEX-2-WAY
- 8 DIG 4'X4' PIT
DAP
STA.04+85
- 9 PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1161 & 1157 RAMBLE AVE,
28.89572, -81.23231
- 10 HAND DIG & PLACE (12')
RT2-HEX-2-WAY
- 11 BORE & PLACE (61')
RT2-HEX-24-WAY
- 12 DIG 4'X4' PIT
STA.05+10


FIBER CORE UNIT (FCU)	
ITEMS	QUANTITY
D-BORE UP TO 2.5" DIA	870'
D-BORE 2.5"-3.5" DIA	00'
D-BORE 3.5"-4.5" DIA	00'
D-BORE 4.5"-7.0" DIA	00'
HAND DIG 24"-36" COVER	84'
TOTAL UG FOOTAGE	954'
HEX-1-WAY	00'
HEX-2-WAY	156'
HEX-12-WAY	461'
HEX-24-WAY	337'
TOBY BOX	7
SPLICE DAP	9

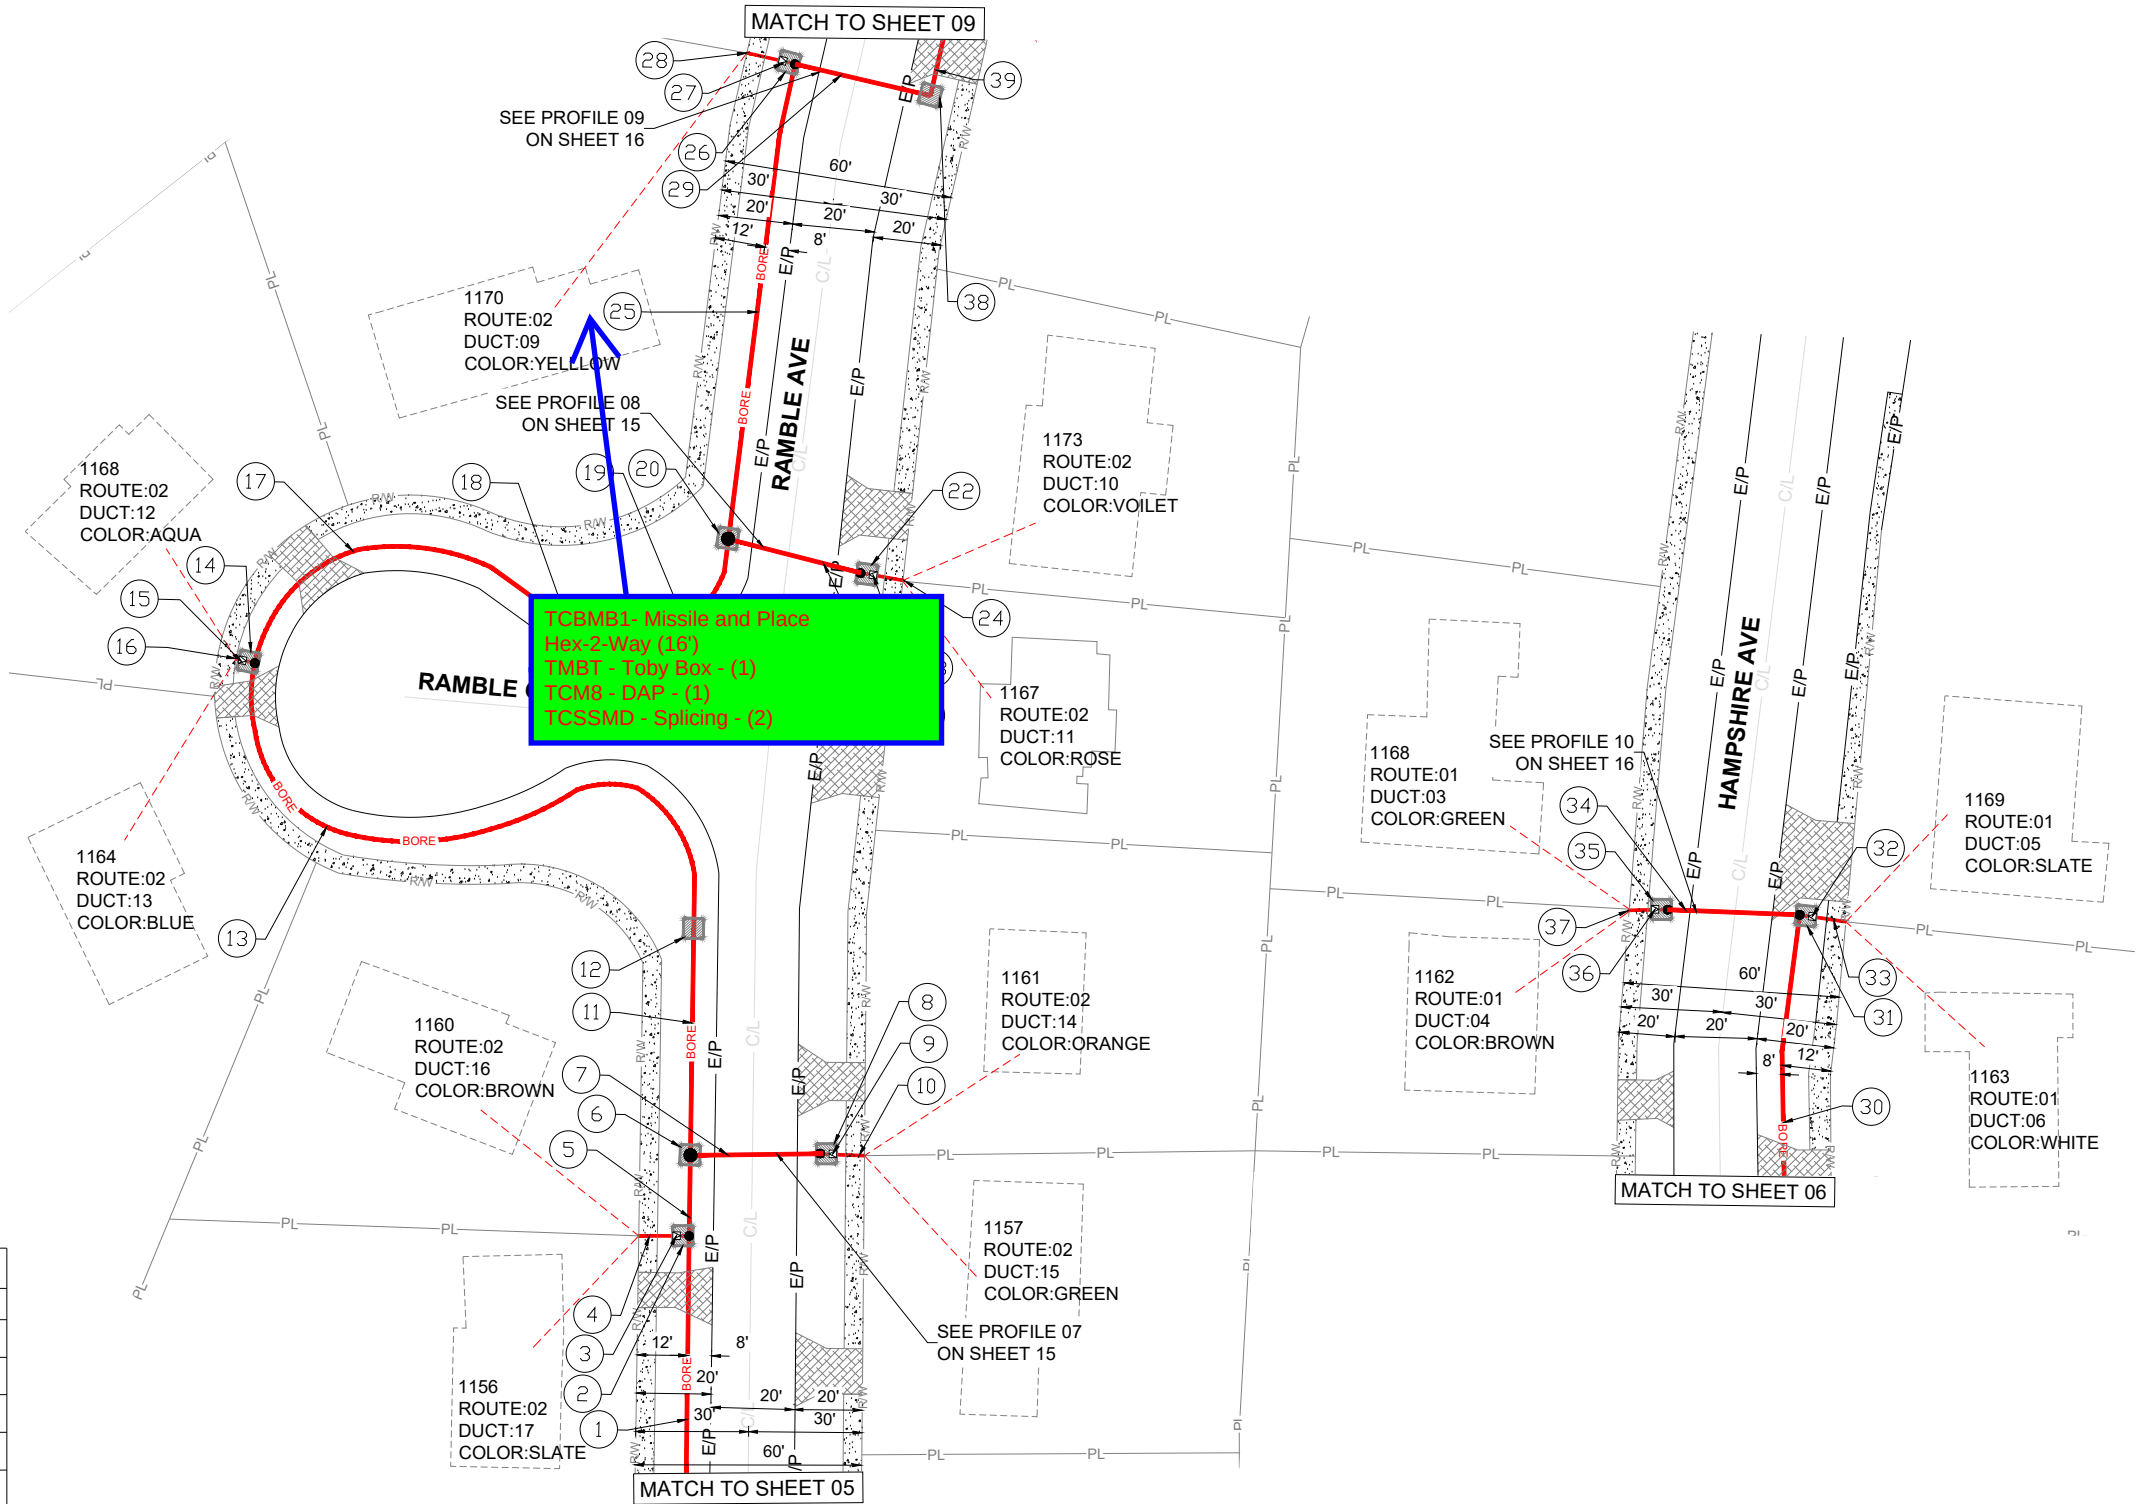

NOTE: CONTRACTOR SHALL REPLACE ALL SIDEWALKS, OR OTHER DISTURBED SURFACES TO A CONDITION EQUAL TO OR BETTER THAN THE PRIOR EXISTING CONDITIONS.

PERMITTING
AGENCY

CITY OF
DELTONA



SCALE: 1" : 40'

CONSTRUCTION DWG.

SEE SHEET 7(A) FOR
MORE NOTES.

EXCAVATION DATA

PROPOSED UTILITY	DIRT
(12) 4'X4' PIT	192 SQ. FT.



CALL 811 BEFORE YOU DIG.
FLORIDA TOLL FREE
800-432-4770



Tillman FiberCo.
Florida, LLC

MasTec
Communications Group

EXISTING UTILITIES SHOWN ARE APPROXIMATE ONLY AND BASED ON AVAILABLE RECORDS AND FIELD OBSERVATIONS. CONTRACTOR IS RESPONSIBLE FOR CALLING 811 AT LEAST 48 HOURS PRIOR TO ANY EXCAVATION. CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS TO PROTECT EXISTING UTILITIES AND ANY DAMAGE TO THE UTILITIES SHALL BE IMMEDIATELY REPAIRED AT THE CONTRACTOR'S EXPENSE.

REVISION DATA

----	-----	
----	-----	
----	-----	
----	-----	

PROJECT NAME : D-HDT221

DRAWN BY: MASTEC

SHEET 07

ADDITIONAL NOTES (SEE SHEET 07)

- 13

BORE & PLACE (182')
RT2-HEX-24-WAY
- 14

DIG 4'X4' PIT
DAP
STA.06+92
- 15

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1164 & 1168 RAMBLE AVE,
28.895992, -81.232817
- 16

HAND DIG & PLACE (12')
RT2-HEX-2-WAY
- 17

BORE & PLACE (103')
RT2-HEX-12-WAY
- 18

DIG 4'X4' PIT
STA.07+95
- 19

BORE & PLACE (75')
RT2-HEX-12-WAY
- 20

DIG 4'X4' PIT
DAP
STA.08+70
- 21

BORE & PLACE (36')
RT2-HEX-2-WAY
- 22

DIG 4'X4' PIT
DAP
STA.09+06
- 23

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1173 & 1167 RAMBLE AVE,
28.895992, -81.232817
- 24

HAND DIG & PLACE (12')
RT2-HEX-2-WAY
- 25

BORE & PLACE (126')
RT2-HEX-12-WAY
- 26

DIG 4'X4' PIT
DAP
STA.09+96
- 27

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1170 RAMBLE AVE,
28.896377, -81.23237
- 28

HAND DIG & PLACE (12')
RT2-HEX-2-WAY
- 29

BORE & PLACE (36')
RT2-HEX-12-WAY
- 30

BORE & PLACE (85')
RT1-HEX-12-WAY
- 31

DIG 4'X4' PIT
DAP
STA.08+64
- 32

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1169 & 1163 HAMPSHIRE AVE,
28.8957882, -81.231473
- 33

HAND DIG & PLACE (12')
RT1-HEX-2-WAY
- 34

BORE & PLACE (36')
RT1-HEX-12-WAY
- 35

DIG 4'X4' PIT
DAP
STA.09+00
- 36

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1168 & 1162 HAMPSHIRE AVE,
28.89580, -81.23160
- 37

HAND DIG & PLACE (12')
RT1-HEX-2-WAY

- 38

DIG 4'X4' PIT
STA.10+32
- 39

BORE & PLACE
SEE SHEET 9

PERMITTING
AGENCY

CITY OF
DELTONA

SCALE: NONE

CONSTRUCTION DWG.



CALL 811 BEFORE YOU DIG.
FLORIDA TOLL FREE
800-432-4770



Tillman FiberCo.
Florida, LLC

MasTec
Communications Group

EXISTING UTILITIES SHOWN ARE APPROXIMATE ONLY AND BASED ON AVAILABLE RECORDS AND FIELD OBSERVATIONS. CONTRACTOR IS RESPONSIBLE FOR CALLING 811 AT LEAST 48 HOURS PRIOR TO ANY EXCAVATION. CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS TO PROTECT EXISTING UTILITIES AND ANY DAMAGE TO THE UTILITIES SHALL BE IMMEDIATELY REPAIRED AT THE CONTRACTOR'S EXPENSE.

REVISION DATA

----	-----	
----	-----	
----	-----	
----	-----	

PROJECT NAME : D-HDT221

DRAWN BY: MASTEC

SHEET 07(A)

- 1

BORE & PLACE (80')
RT3-HEX-12-WAY
- 2

DIG 4'X4' PIT
DAP
STA.07+21
- 3

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1467 & 1471 WILTSHIRE AVE
28.896481, -81.23221
- 4

HAND DIG & PLACE (12')
RT3-HEX-2-WAY
- 5

BORE & PLACE (68')
RT3-HEX-12-WAY
- 6

DIG 4'X4' PIT
DAP
STA.06+53
- 7

BORE & PLACE (36')
RT3-HEX-2-WAY
- 8

DIG 4'X4' PIT
DAP
STA.06+89
- 9

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1462 & 1468 WILTSHIRE AVE
28.896463, -81.233430
- 10

HAND DIG & PLACE (12')
RT3-HEX-2-WAY
- 11

BORE & PLACE (82')
RT3-HEX-12-WAY
- 12

DIG 4'X4' PIT
DAP
STA.05+71
- 13

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1468 & 1459 WILTSHIRE AVE
28.896463, -81.233430
- 14

HAND DIG & PLACE (12')
RT3-HEX-2-WAY
- 15

DIG 4'X4' PIT
DAP
STA.05+61
- 16

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1458 WILTSHIRE AVE
28.8961968, -81.233789
- 17

HAND DIG & PLACE (12')
RT3-HEX-2-WAY
- 18

BORE & PLACE (35')
RT3-HEX-24-WAY
- 19

BORE & PLACE (45')
RT3-HEX-24-WAY
- 20

DIG 4'X4' PIT
DAP
STA.02+95
- 21

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1181 & 1171 SAXON BLVD
28.8956447, -81.23348088
- 22

HAND DIG & PLACE (1')
RT3-HEX-2-WAY
- 23

BORE & PLACE (46')
RT3-HEX-24-WAY
- 24

DIG 4'X4' PIT
DAP
STA.05+25
- 25

BORE & PLACE (36')
RT3-HEX-2-WAY
- 26


DIG 4'X4' PIT
DAP
STA.04+50
- 27

BORE & PLACE
SEE SHEET 5

FIBER CORE UNIT (FCU)	
ITEMS	QUANTITY
D-BORE UP TO 2.5" DIA	538'
D-BORE 2.5"-3.5" DIA	00'
D-BORE 3.5"-4.5" DIA	00'
D-BORE 4.5"-7.0" DIA	00'
HAND DIG 24"-36" COVER	49'
TOTAL UG FOOTAGE	587'
HEX-1-WAY	00'
HEX-2-WAY	121'
HEX-12-WAY	230'
HEX-24-WAY	236'
TOBY BOX	5
SPLICE DAP	7


NOTE: CONTRACTOR SHALL REPLACE ALL
SIDEWALKS, OR OTHER DISTURBED SURFACES
TO A CONDITION EQUAL TO OR BETTER THAN
THE PRIOR EXISTING CONDITIONS.

TCMB - DAP - (1)
TCSSMD Splicing - (12)

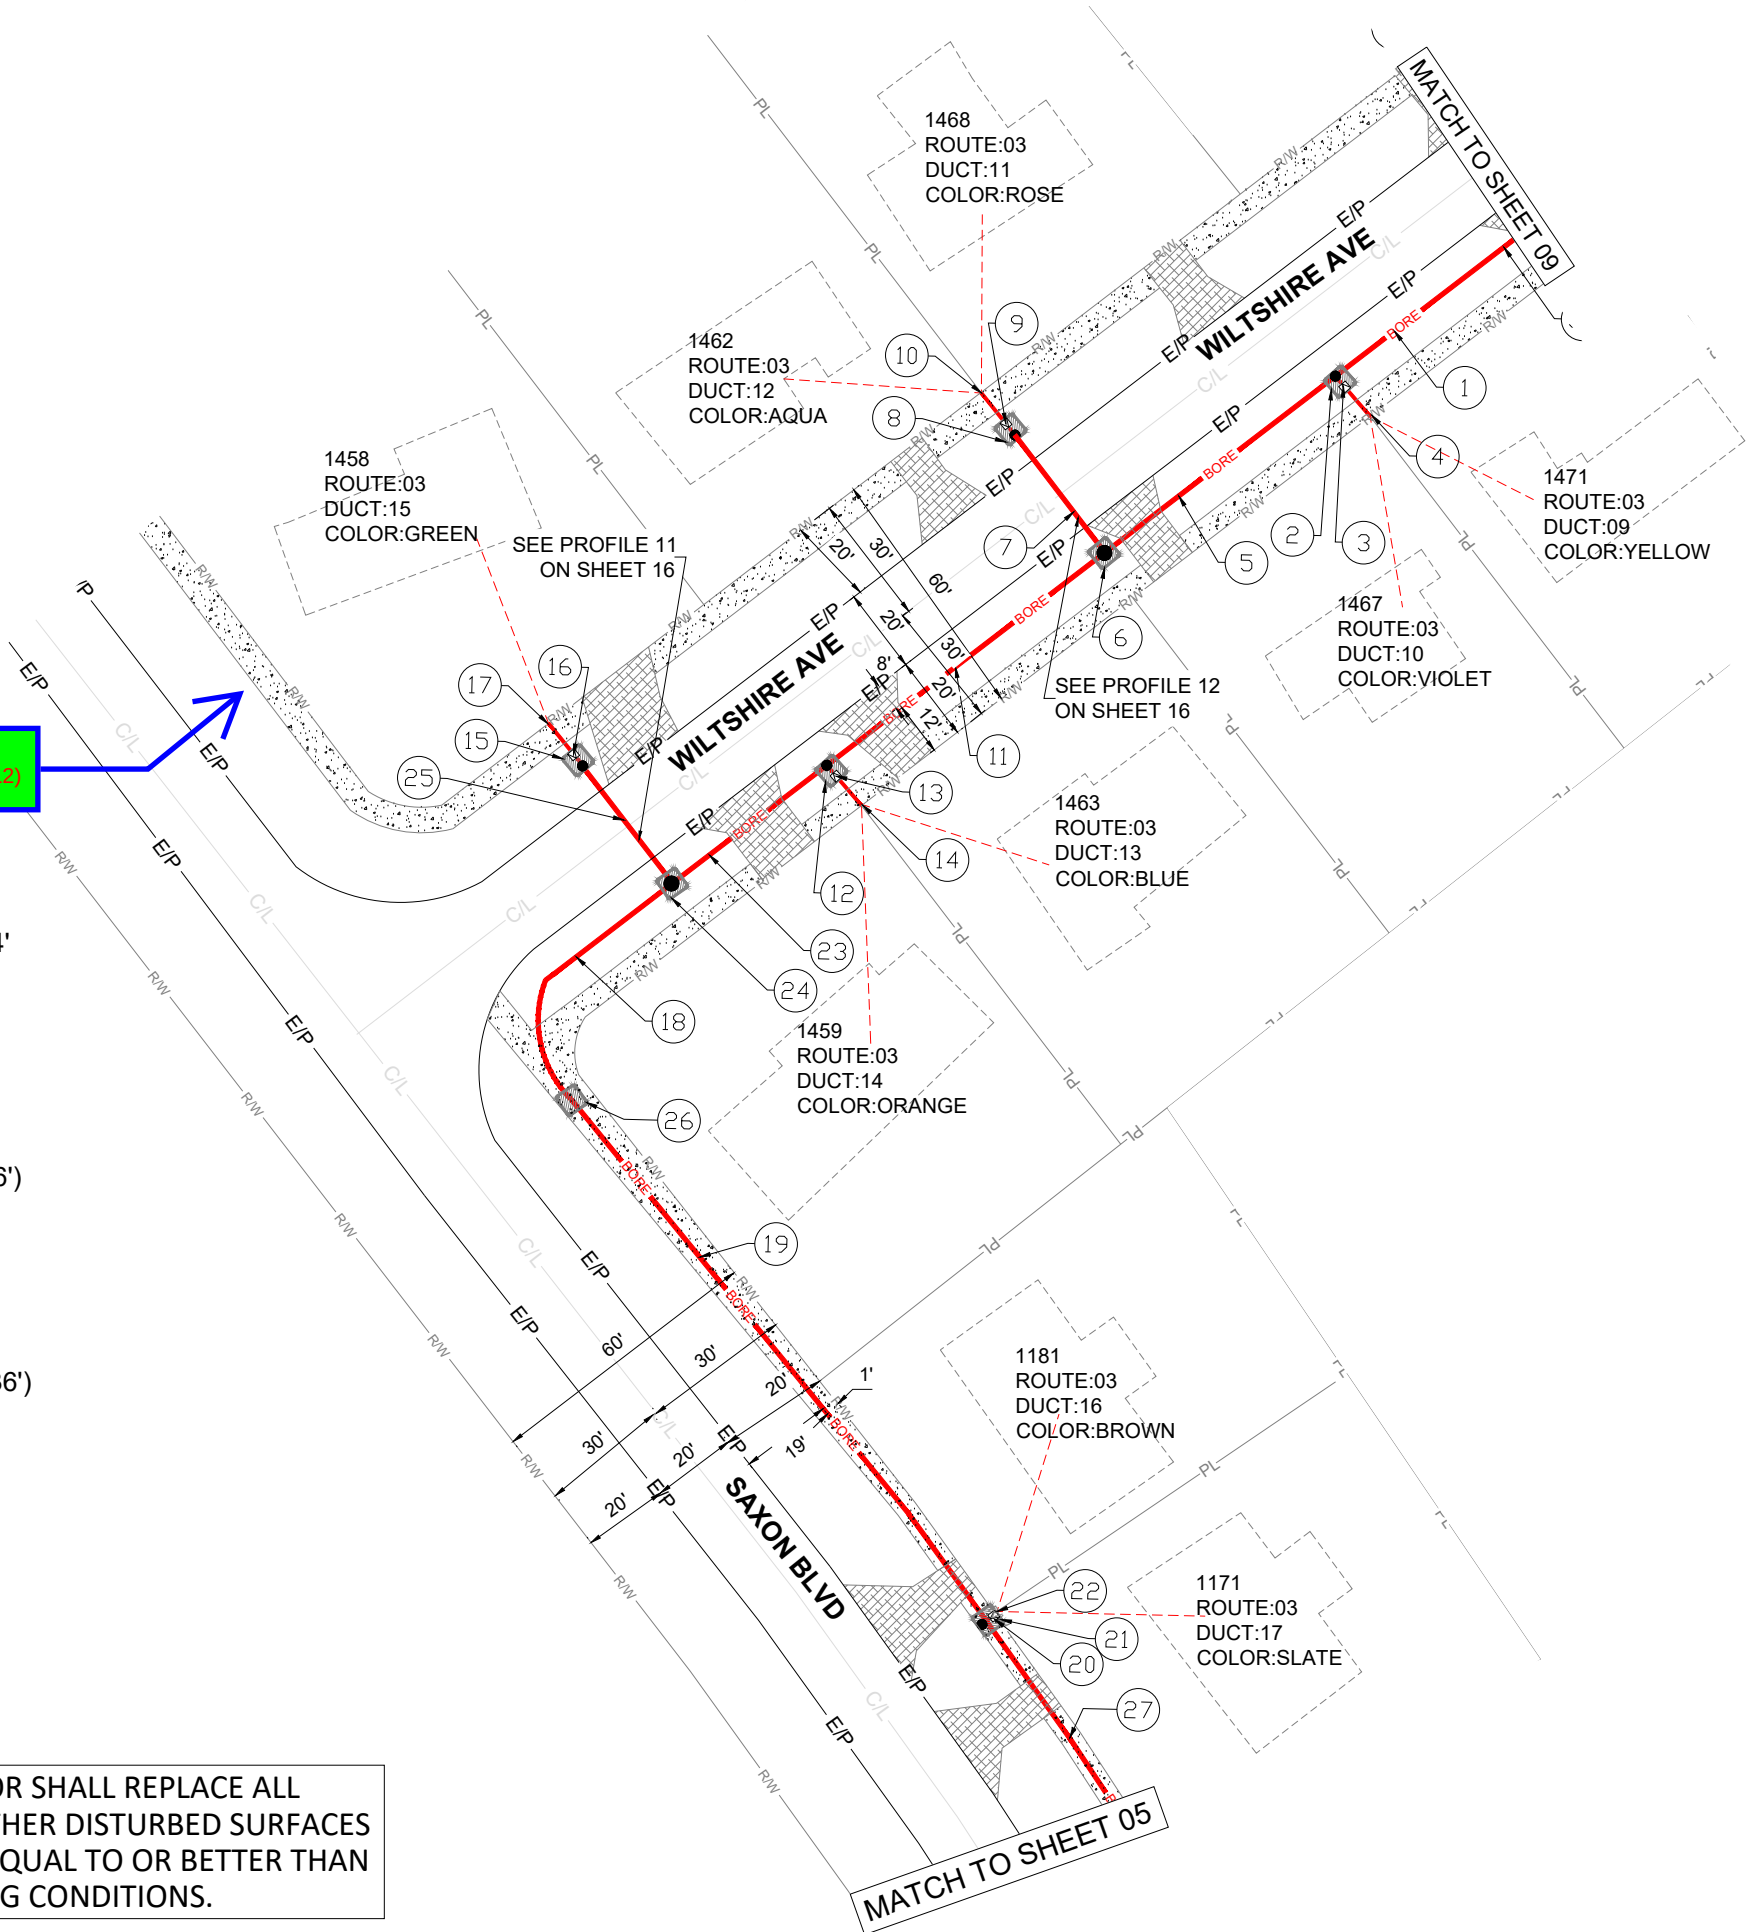

PERMITTING
AGENCY

CITY OF
DELTONA



SCALE: 1" : 40'

CONSTRUCTION DWG.

EXCAVATION DATA	
PROPOSED UTILITY (8) 4'X4' PIT	DIRT 128 SQ. FT.



CALL 811 BEFORE YOU DIG.
FLORIDA TOLL FREE
800-432-4770

Tillman FiberCo.
Florida, LLC

MasTec
Communications Group

EXISTING UTILITIES SHOWN ARE APPROXIMATE
ONLY AND BASED ON AVAILABLE RECORDS AND
FIELD OBSERVATIONS. CONTRACTOR IS
RESPONSIBLE FOR CALLING 811 AT LEAST 48
HOURS PRIOR TO ANY EXCAVATION. CONTRACTOR
SHALL TAKE ALL NECESSARY PRECAUTIONS TO
PROTECT EXISTING UTILITIES AND ANY DAMAGE TO
THE UTILITIES SHALL BE IMMEDIATELY REPAIRED
AT THE CONTRACTOR'S EXPENSE.

REVISION DATA		
----	-----	
----	-----	
----	-----	
----	-----	

PROJECT NAME : D-HDT221

DRAWN BY: MASTEC

SHEET 08

- 1

BORE & PLACE (34')
RT2-HEX-12-WAY
- 2

DIG 4'X4' PIT
DAP
STA.10+66
- 3

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1179 RAMBLE AVE
28.896481, -81.23221
- 4

HAND DIG & PLACE (12')
RT2-HEX-2-WAY
- 5

BORE & PLACE (71')
RT2-HEX-12-WAY
- 6

DIG 4'X4' PIT
DAP
STA.11+37
- 7

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1187 & 1193 RAMBLE AVE
28.8966690, -81.232143
- 8

HAND DIG & PLACE (12')
RT2-HEX-2-WAY
- 9


BORE & PLACE (137')
RT2-HEX-12-WAY
- 10

DIG 4'X4' PIT
DAP
STA.12+74
- 11

BORE & PLACE (23')
RT2-HEX-12-WAY
- 12

DIG 4'X4' PIT
DAP
STA.12+97

TCBMB1- Missile and Place
Hex-12-Way (')

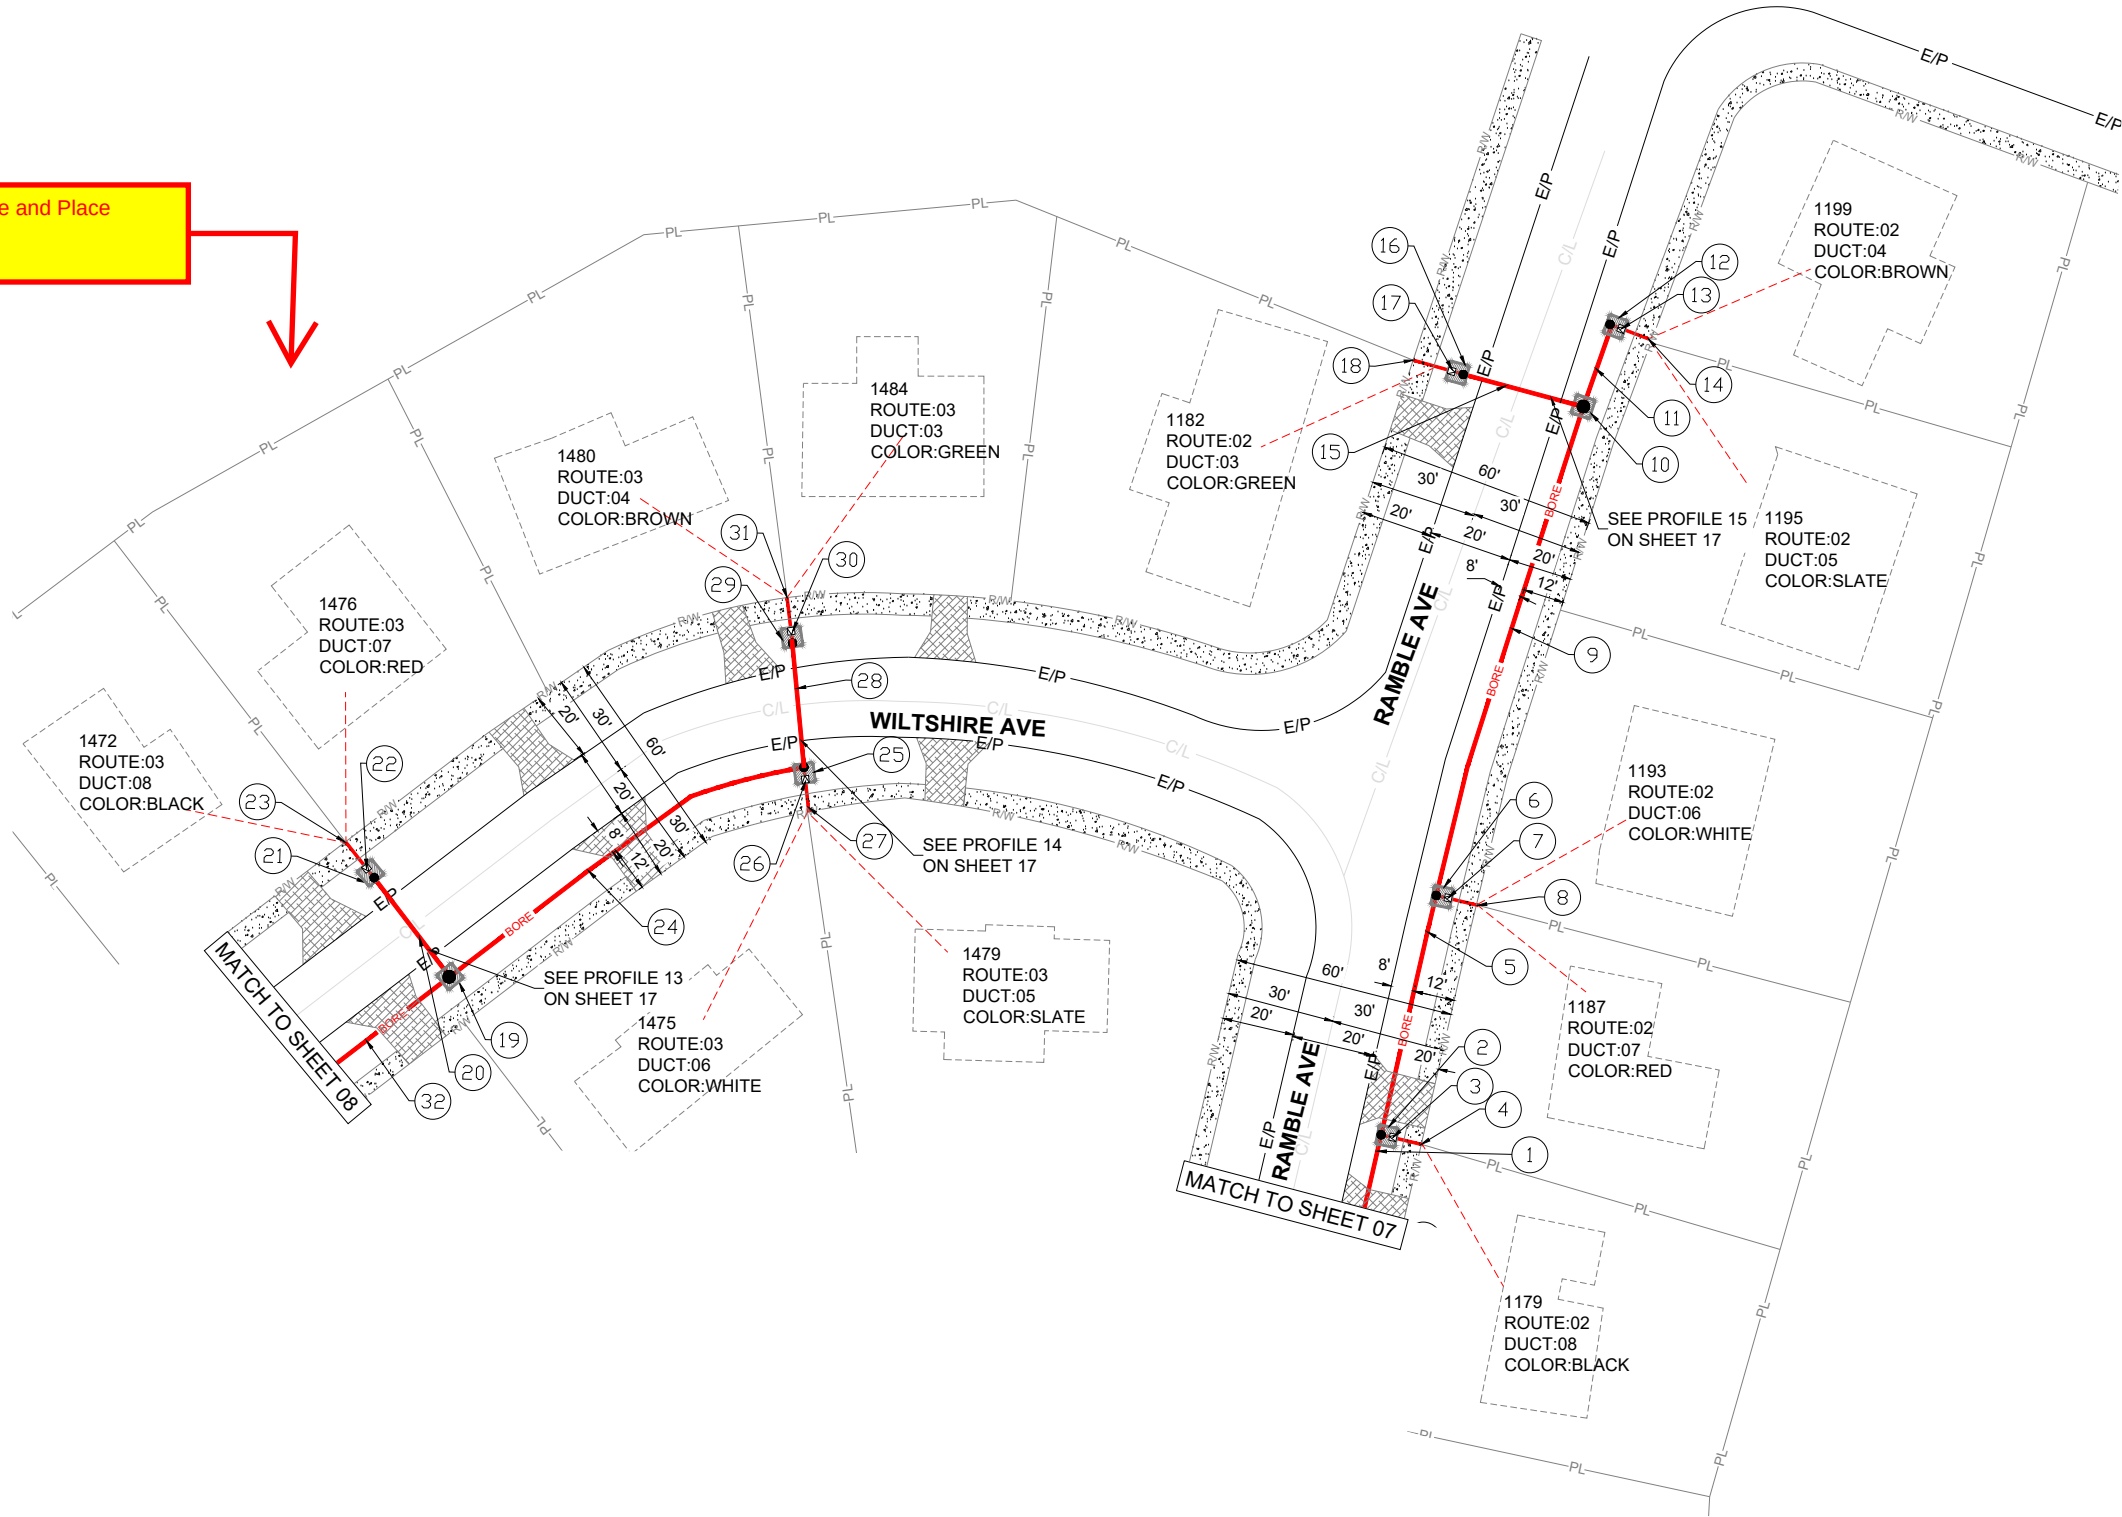

NOTE: CONTRACTOR SHALL REPLACE ALL SIDEWALKS, OR OTHER
DISTURBED SURFACES TO A CONDITION EQUAL TO OR BETTER THAN
THE PRIOR EXISTING CONDITIONS.

FIBER CORE UNIT (FCU)	
ITEMS	QUANTITY
D-BORE UP TO 2.5" DIA	488'
D-BORE 2.5"-3.5" DIA	00'
D-BORE 3.5"-4.5" DIA	00'
D-BORE 4.5"-7.0" DIA	00'
HAND DIG 24"-36" COVER	84'
TOTAL UG FOOTAGE	572'
HEX-1-WAY	00'
HEX-2-WAY	156'
HEX-12-WAY	416'
HEX-24-WAY	00'
TOBY BOX	7
SPLICE DAP	9

PERMITTING
AGENCY

CITY OF
DELTONA

SCALE: 1" : 40'

CONSTRUCTION DWG.

SEE SHEET 9(A) FOR
MORE NOTES.

EXCAVATION DATA

PROPOSED UTILITY (9) 4'X4' PIT	DIRT 144 SQ. FT.
-----------------------------------	---------------------

811

CALL 811 BEFORE YOU DIG.
FLORIDA TOLL FREE
800-432-4770

Tillman FiberCo.
Florida, LLC

MasTec
Communications Group

EXISTING UTILITIES SHOWN ARE APPROXIMATE
ONLY AND BASED ON AVAILABLE RECORDS AND
FIELD OBSERVATIONS. CONTRACTOR IS
RESPONSIBLE FOR CALLING 811 AT LEAST 48
HOURS PRIOR TO ANY EXCAVATION. CONTRACTOR
SHALL TAKE ALL NECESSARY PRECAUTIONS TO
PROTECT EXISTING UTILITIES AND ANY DAMAGE TO
THE UTILITIES SHALL BE IMMEDIATELY REPAIRED
AT THE CONTRACTOR'S EXPENSE.

REVISION DATA

----	-----	
----	-----	
----	-----	
----	-----	

PROJECT NAME : D-HDT221

DRAWN BY: MASTEC

SHEET 09

ADDITIONAL NOTES (SEE SHEET 09)

- 13

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1199 & 1195 RAMBLE AVE
28.89711305, -81.2320008
- 14

HAND DIG & PLACE (12')
RT2-HEX-2-WAY
- 15

BORE & PLACE (36')
RT2-HEX-2-WAY
- 16

DIG 4'X4' PIT
DAP
STA.13+10
- 17

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1182 RAMBLE AVE
28.897001, -81.23219
- 18

HAND DIG & PLACE (12')
RT2-HEX-2-WAY
- 19

DIG 4'X4' PIT
DAP
STA.08+01
- 20

BORE & PLACE (36')
RT3-HEX-2-WAY
- 21

DIG 4'X4' PIT
DAP
STA.08+37
- 22

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1472 & 1476 WILT SHIRE AVE
28.896559, -81.2332641
- 23

HAND DIG & PLACE (12')
RT3-HEX-2-WAY
- 24

BORE & PLACE (115')
RT3-HEX-12-WAY
- 25

DIG 4'X4' PIT
DAP
STA.09+16
- 26

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1475 & 1479 WILT SHIRE AVE
28.896787, -81.23267
- 27

HAND DIG & PLACE (12')
RT2-HEX-2-WAY
- 28

BORE & PLACE (36')
RT3-HEX-12-WAY
- 29

DIG 4'X4' PIT
DAP
STA. 09+52
- 30

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1480 & 1484 WILT SHIRE AVE
28.896879, -81.232683
- 31

HAND DIG & PLACE (12')
RT3-HEX-2-WAY
- 32

BORE & PLACE
SEE SHEET 8

TCBMB1- Missile and Place
Hex-24-Way (')



PERMITTING
AGENCY

CITY OF
DELTONA

SCALE: NONE

CONSTRUCTION DWG.



CALL 811 BEFORE YOU DIG.
FLORIDA TOLL FREE
800-432-4770





EXISTING UTILITIES SHOWN ARE APPROXIMATE ONLY AND BASED ON AVAILABLE RECORDS AND FIELD OBSERVATIONS. CONTRACTOR IS RESPONSIBLE FOR CALLING 811 AT LEAST 48 HOURS PRIOR TO ANY EXCAVATION. CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS TO PROTECT EXISTING UTILITIES AND ANY DAMAGE TO THE UTILITIES SHALL BE IMMEDIATELY REPAIRED AT THE CONTRACTOR'S EXPENSE.

REVISION DATA

----	-----	
----	-----	
----	-----	
----	-----	

PROJECT NAME : D-HDT221

DRAWN BY: MASTEC

SHEET 09(A)

- 1

BORE & PLACE (148')
RT4-HEX-24-WAY
RT5-HEX-24-WAY
12SR IN RT5 TO
D-HDT222
- 2

DIG 4'X4' PIT
DAP
STA.02+35
- 3

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1111 & 1101 SAXON BLVD
28.8947309, -81.233062
- 4

HAND DIG & PLACE (1')
RT5-HEX-2-WAY
- 5

BORE & PLACE (97')
RT4-HEX-24-WAY
RT5-HEX-24-WAY
12SR IN RT5 TO
D-HDT222
- 6


DIG 4'X4' PIT
DAP
STA.03+32
- 7

BORE & PLACE (44')
RT5-HEX-2-WAY
12SR IN RT5 TO
D-HDT222
- 8

DIG 4'X4' PIT
DAP
STA.03+76

FIBER CORE UNIT (FCU)	
ITEMS	QUANTITY
D-BORE UP TO 2.5" DIA	124'
D-BORE 2.5"-3.5" DIA	234'
D-BORE 3.5"-4.5" DIA	431'
D-BORE 4.5"-7.0" DIA	00'
HAND DIG 24"-36" COVER	52'
TOTAL UG FOOTAGE	841'
HEX-1-WAY	00'
HEX-2-WAY	176'
HEX-12-WAY	234'
HEX-24-WAY	1096'
12 STINGRAY	289'
TOBY BOX	7
SPLICE DAP	10

TCBMB1- Missile and
PlaceHex-24-Way (')Hex-12-
Way (')

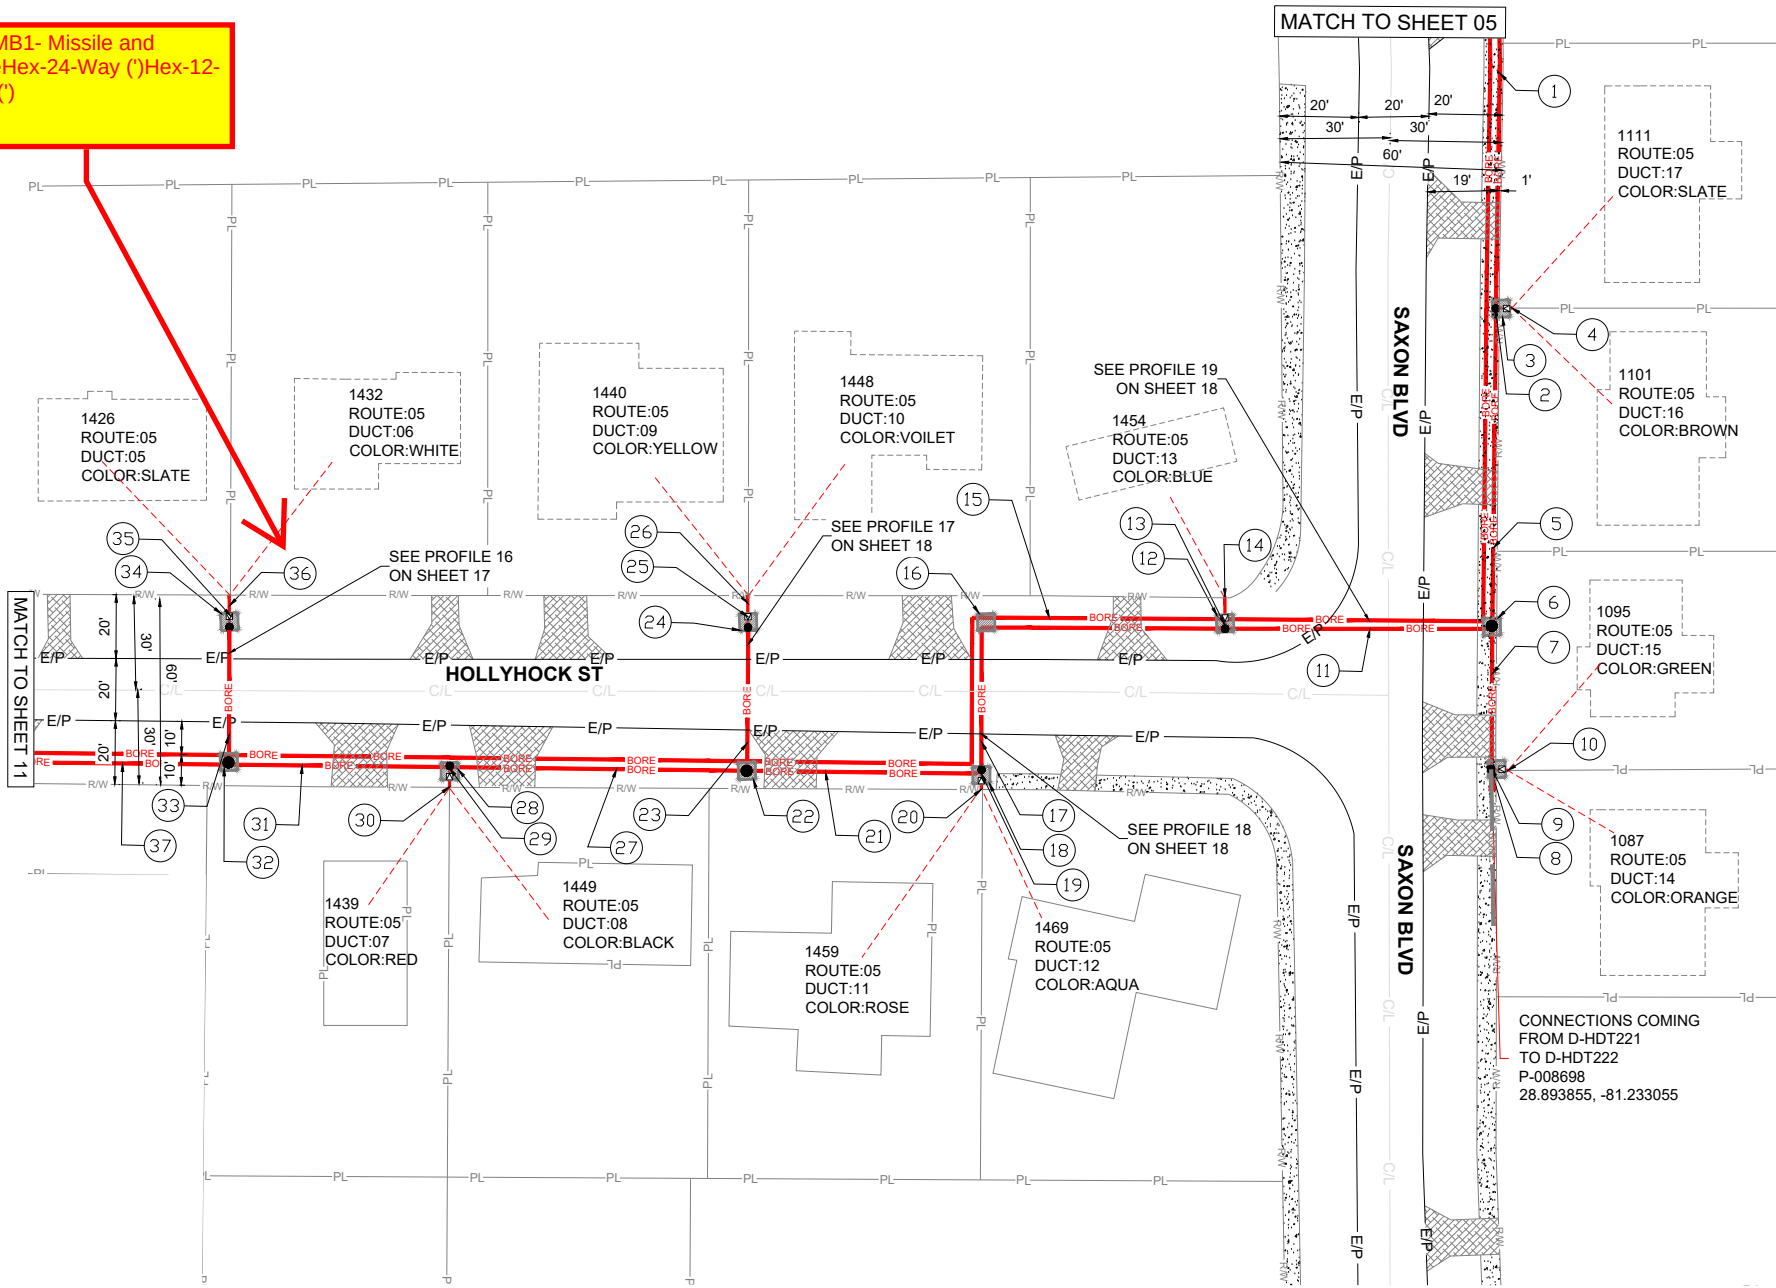

NOTE: CONTRACTOR SHALL REPLACE ALL SIDEWALKS, OR OTHER
DISTURBED SURFACES TO A CONDITION EQUAL TO OR BETTER THAN
THE PRIOR EXISTING CONDITIONS.

PERMITTING
AGENCY

CITY OF
DELTONA

SCALE: 1" : 40'

CONSTRUCTION DWG.
SEE SHEET 10(A) FOR
MORE NOTES.

EXCAVATION DATA

PROPOSED UTILITY (11) 4'X4' PIT	DIRT 176 SQ. FT.
------------------------------------	---------------------

811

CALL 811 BEFORE YOU DIG.
FLORIDA TOLL FREE
800-432-4770

Tillman FiberCo.
Florida, LLC

MasTec
Communications Group

EXISTING UTILITIES SHOWN ARE APPROXIMATE
ONLY AND BASED ON AVAILABLE RECORDS AND
FIELD OBSERVATIONS. CONTRACTOR IS
RESPONSIBLE FOR CALLING 811 AT LEAST 48
HOURS PRIOR TO ANY EXCAVATION. CONTRACTOR
SHALL TAKE ALL NECESSARY PRECAUTIONS TO
PROTECT EXISTING UTILITIES AND ANY DAMAGE TO
THE UTILITIES SHALL BE IMMEDIATELY REPAIRED
AT THE CONTRACTOR'S EXPENSE.

REVISION DATA

----	-----	
----	-----	
----	-----	
----	-----	

PROJECT NAME : D-HDT221

DRAWN BY: MASTEC

SHEET 10

ADDITIONAL NOTES (SEE SHEET 10)

- 9

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1095 & 1087 SAXON BLVD
28.8938509, -81.233059
- 10

HAND DIG & PLACE (1')
RT5-HEX-2-WAY
- 11

BORE & PLACE (72')
RT4-HEX-24-WAY
RT5-HEX-24-WAY
- 12

DIG 4'X4' PIT
DAP
STA.04+04
- 13

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1454 HOLLYHOCKS ST
28.8939712, -81.233323
- 14

HAND DIG & PLACE (10')
RT5-HEX-2-WAY
- 15

BORE & PLACE (74')
RT4-HEX-24-WAY
RT5-HEX-24-WAY
- 16

DIG 4'X4' PIT
STA.04+78
- 17

BORE & PLACE (40')
RT4-HEX-24-WAY
RT5-HEX-24-WAY
- 18

DIG 4'X4' PIT
DAP
STA.05+18
- 19

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1459 & 1469 HOLLYHOCK ST
28.893895, -81.233358
- 20

HAND DIG & PLACE (10')
RT5-HEX-2-WAY
- 21

BORE & PLACE (77')
RT4-HEX-24-WAY
RT5-HEX-12-WAY
- 22

DIG 4'X4' PIT
DAP
STA.05+95
- 23

BORE & PLACE (40')
RT5-HEX-2-WAY
- 24

DIG 4'X4' PIT
DAP
STA.06+35
- 25

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1440 & 1448 HOLLYHOCK ST
28.8939819, -81.233767
- 26

HAND DIG & PLACE (10')
RT5-HEX-2-WAY
- 27

BORE & PLACE (69')
RT4-HEX-24-WAY
RT5-HEX-12-WAY
- 28

DIG 4'X4' PIT
DAP
STA.06+83
- 29

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1439 & 1449 HOLLYHOCK ST
28.893906 -81.234058
- 30

HAND DIG & PLACE (10')
RT5-HEX-2-WAY
- 31

BORE & PLACE (69')
RT4-HEX-24-WAY
RT5-HEX-12-WAY
- 32

DIG 4'X4' PIT
DAP
STA.07+52
- 33

BORE & PLACE (40')
RT5-HEX-2-WAY
- 34

DIG 4'X4' PIT
DAP
STA.07+92
- 35

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1426 & 1432 HOLLYHOCK ST
28.893988, -81.234227
- 36

HAND DIG & PLACE (10')
RT5-HEX-2-WAY
- 37

BORE & PLACE
SEE SHEET 8

TCBMB1- Missile and Place
Hex-24-Way ()
Hex-12-Way ()
Hex-12-Way ()

PERMITTING AGENCY

CITY OF DELTONA

SCALE: NONE

CONSTRUCTION DWG.



CALL 811 BEFORE YOU DIG.
FLORIDA TOLL FREE
800-432-4770



Tillman FiberCo.
Florida, LLC




EXISTING UTILITIES SHOWN ARE APPROXIMATE ONLY AND BASED ON AVAILABLE RECORDS AND FIELD OBSERVATIONS. CONTRACTOR IS RESPONSIBLE FOR CALLING 811 AT LEAST 48 HOURS PRIOR TO ANY EXCAVATION. CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS TO PROTECT EXISTING UTILITIES AND ANY DAMAGE TO THE UTILITIES SHALL BE IMMEDIATELY REPAIRED AT THE CONTRACTOR'S EXPENSE.

REVISION DATA		
----	-----	
----	-----	
----	-----	
----	-----	
PROJECT NAME : D-HDT221		
DRAWN BY: MASTEC		SHEET 10(A)

- ① BORE & PLACE (87')
RT4-HEX-24-WAY
RT5-HEX-12-WAY
- ② DIG 4'X4' PIT
DAP
STA.08+39
- ③ PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1419 & 1429 HOLLYHOCK ST
28.8947309, -81.233062
- ④ HAND DIG & PLACE (10')
RT5-HEX-2-WAY
- ⑤ BORE & PLACE (53')
RT4-HEX-24-WAY
- ⑥ DIG 4'X4' PIT
DAP
STA.08+92
- ⑦ BORE & PLACE (40')
RT4-HEX-2-WAY
- ⑧ DIG 4'X4' PIT
DAP
STA.09+32
- ⑨ PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1410 & 1418 HOLLYHOCK ST
28.893992, -81.2347432
- ⑩ HAND DIG & PLACE (10')
RT4-HEX-2-WAY


FIBER CORE UNIT (FCU)	
ITEMS	QUANTITY
D-BORE UP TO 2.5" DIA	646'
D-BORE 2.5"-3.5" DIA	87'
D-BORE 3.5"-4.5" DIA	00'
D-BORE 4.5"-7.0" DIA	00'
HAND DIG 24"-36" COVER	80'
TOTAL UG FOOTAGE	813'
HEX-1-WAY	00'
HEX-2-WAY	415'
HEX-12-WAY	87'
HEX-24-WAY	398'
TOBY BOX	8
SPLICE DAP	11

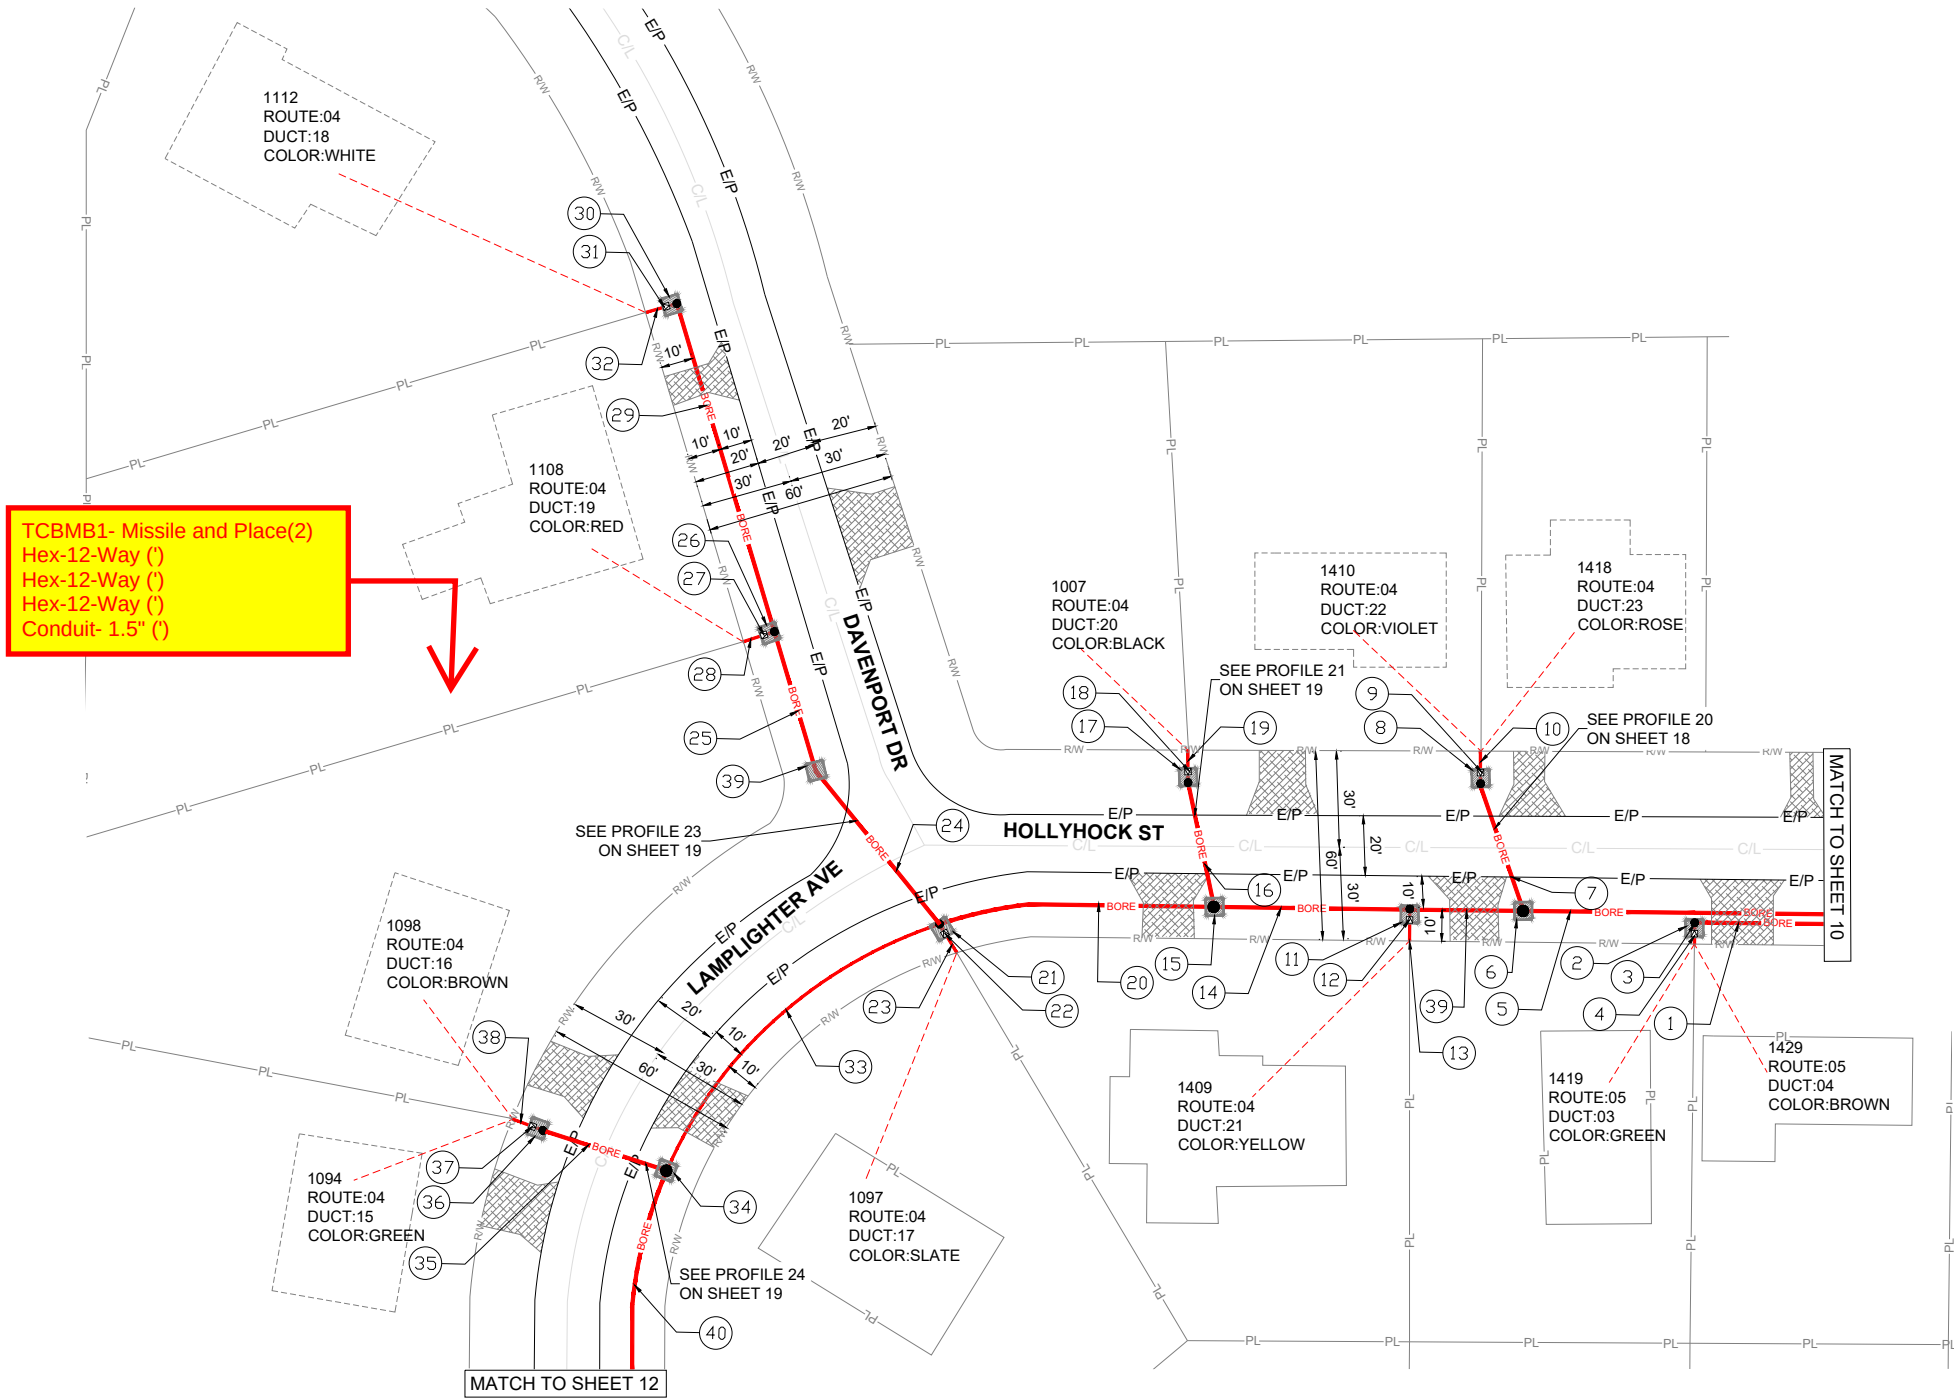

NOTE: CONTRACTOR SHALL REPLACE ALL SIDEWALKS, OR OTHER DISTURBED SURFACES TO A CONDITION EQUAL TO OR BETTER THAN THE PRIOR EXISTING CONDITIONS.

PERMITTING
AGENCY

CITY OF
DELTONA



SCALE: 1" : 40'

CONSTRUCTION DWG.

SEE SHEET 11(A) FOR
MORE NOTES.

EXCAVATION DATA

PROPOSED UTILITY	DIRT
(12) 4'X4' PIT	192 SQ. FT.



CALL 811 BEFORE YOU DIG.
FLORIDA TOLL FREE
800-432-4770



Tillman FiberCo.
Florida, LLC

MasTec
Communications Group

EXISTING UTILITIES SHOWN ARE APPROXIMATE ONLY AND BASED ON AVAILABLE RECORDS AND FIELD OBSERVATIONS. CONTRACTOR IS RESPONSIBLE FOR CALLING 811 AT LEAST 48 HOURS PRIOR TO ANY EXCAVATION. CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS TO PROTECT EXISTING UTILITIES AND ANY DAMAGE TO THE UTILITIES SHALL BE IMMEDIATELY REPAIRED AT THE CONTRACTOR'S EXPENSE.

REVISION DATA

----	-----	
----	-----	
----	-----	
----	-----	

PROJECT NAME : D-HDT221

DRAWN BY: MASTEC

SHEET 11

ADDITIONAL NOTES (SEE SHEET 11)

- 11

DIG 4'X4' PIT
DAP
STA.09+25

12

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1409 HOLLYHOCK ST
28.89391288, -81.23482100

13

HAND DIG & PLACE (10')
RT4-HEX-2-WAY

14

BORE & PLACE (59')
RT4-HEX-24-WAY

15

DIG 4'X4' PIT
DAP
STA.09+84

16

BORE & PLACE (40')
RT4-HEX-2-WAY

17

DIG 4'X4' PIT
DAP
STA.10+24

18

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1007 HOLLYHOCK ST
28.894077, -81.23508

19

HAND DIG & PLACE (10')
RT5-HEX-2-WAY

20

BORE & PLACE (84')
RT4-HEX-24-WAY

21

DIG 4'X4' PIT
DAP
STA.10+68

22

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1409 HOLLYHOCK ST
28.893831, -81.235366

23

HAND DIG & PLACE (10')
RT4-HEX-2-WAY

24

BORE & PLACE (65')
RT4-HEX-2-WAY

25

BORE & PLACE (45')
RT4-HEX-2-WAY

26

DIG 4'X4' PIT
DAP
STA.11+78

27

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1108 DAVENPORT DR
28.894211,-81.2354265

28

HAND DIG & PLACE (10')
RT5-HEX-2-WAY

29

BORE & PLACE (105')
RT4-HEX-2-WAY

30

DIG 4'X4' PIT
DAP
STA.12+83

31

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1112 DAVENPORT DR
28.894211,-81.2354265

32

HAND DIG & PLACE (10')
RT4-HEX-2-WAY

33

BORE & PLACE (115')
RT4-HEX-24-WAY

34

DIG 4'X4' PIT
DAP
STA.11+83

35

BORE & PLACE (40')
RT4-HEX-2-WAY

36

DIG 4'X4' PIT
DAP
STA.12+23

37

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1098 & 1094 LAMPLIGHTER AVE
28.89369280, -81.235608

38

HAND DIG & PLACE (10')
RT4-HEX-2-WAY

39

DIG 4'X4' PIT
STA.11+33

40

BORE & PLACE
SEE SHEET 12
- TCBMB1- Missile and
Place
Hex-24-Way (*)
-
- PERMITTING
AGENCY

CITY OF
DELTONA

SCALE: NONE

CONSTRUCTION DWG.

811

Know what's below.
Call before you dig.

CALL 811 BEFORE YOU DIG.
FLORIDA TOLL FREE
800-432-4770

Tillman FiberCo.

Florida, LLC

MasTec

Communications Group

EXISTING UTILITIES SHOWN ARE APPROXIMATE ONLY AND BASED ON AVAILABLE RECORDS AND FIELD OBSERVATIONS. CONTRACTOR IS RESPONSIBLE FOR CALLING 811 AT LEAST 48 HOURS PRIOR TO ANY EXCAVATION. CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS TO PROTECT EXISTING UTILITIES AND ANY DAMAGE TO THE UTILITIES SHALL BE IMMEDIATELY REPAIRED AT THE CONTRACTOR'S EXPENSE.

REVISION DATA

----	-----	
----	-----	
----	-----	
----	-----	

PROJECT NAME : D-HDT221

DRAWN BY: MASTEC

SHEET 11(A)

- 1

BORE & PLACE (150')
RT4-HEX-24-WAY
- 2

DIG 4'X4' PIT
DAP
STA.13+33
- 3

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1089 LAMPLIGHTER AVE
28.89332, -81.2355680
- 4

HAND DIG & PLACE (10')
RT4-HEX-2-WAY
- 5

BORE & PLACE (40')
RT4-HEX-2-WAY
- 6

DIG 4'X4' PIT
DAP
STA.13+73
- 7

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1092 & 1086 LAMPLIGHTER AVE
28.8934200, -81.2357035
- 8

HAND DIG & PLACE (10')
RT4-HEX-2-WAY
- 9

BORE & PLACE (161')
RT4-HEX-12-WAY
- 10

BORE & PLACE
SEE SHEET 13
- 11

DIG 4'X4' PIT
DAP
STA.14+94
- 12

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1408 LAMPLIGHTER AVE
28.893139, -81.2350061
- 13

HAND DIG & PLACE (10')
RT4-HEX-2-WAY
- 14

BORE & PLACE (41')
RT4-HEX-12-WAY

- 15

DIG 4'X4' PIT
DAP
STA.15+74
- 16


BORE & PLACE (40')
RT4-HEX-2-WAY
- 17

DIG 4'X4' PIT
DAP
STA.15+75
- 18

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES
1407 & 1413 LAMPLIGHTER AVE
28.8930537, -81.2350262
- 19

HAND DIG & PLACE (10')
RT4-HEX-2-WAY
- 20

DIG 4'X4' PIT
STA.13+88

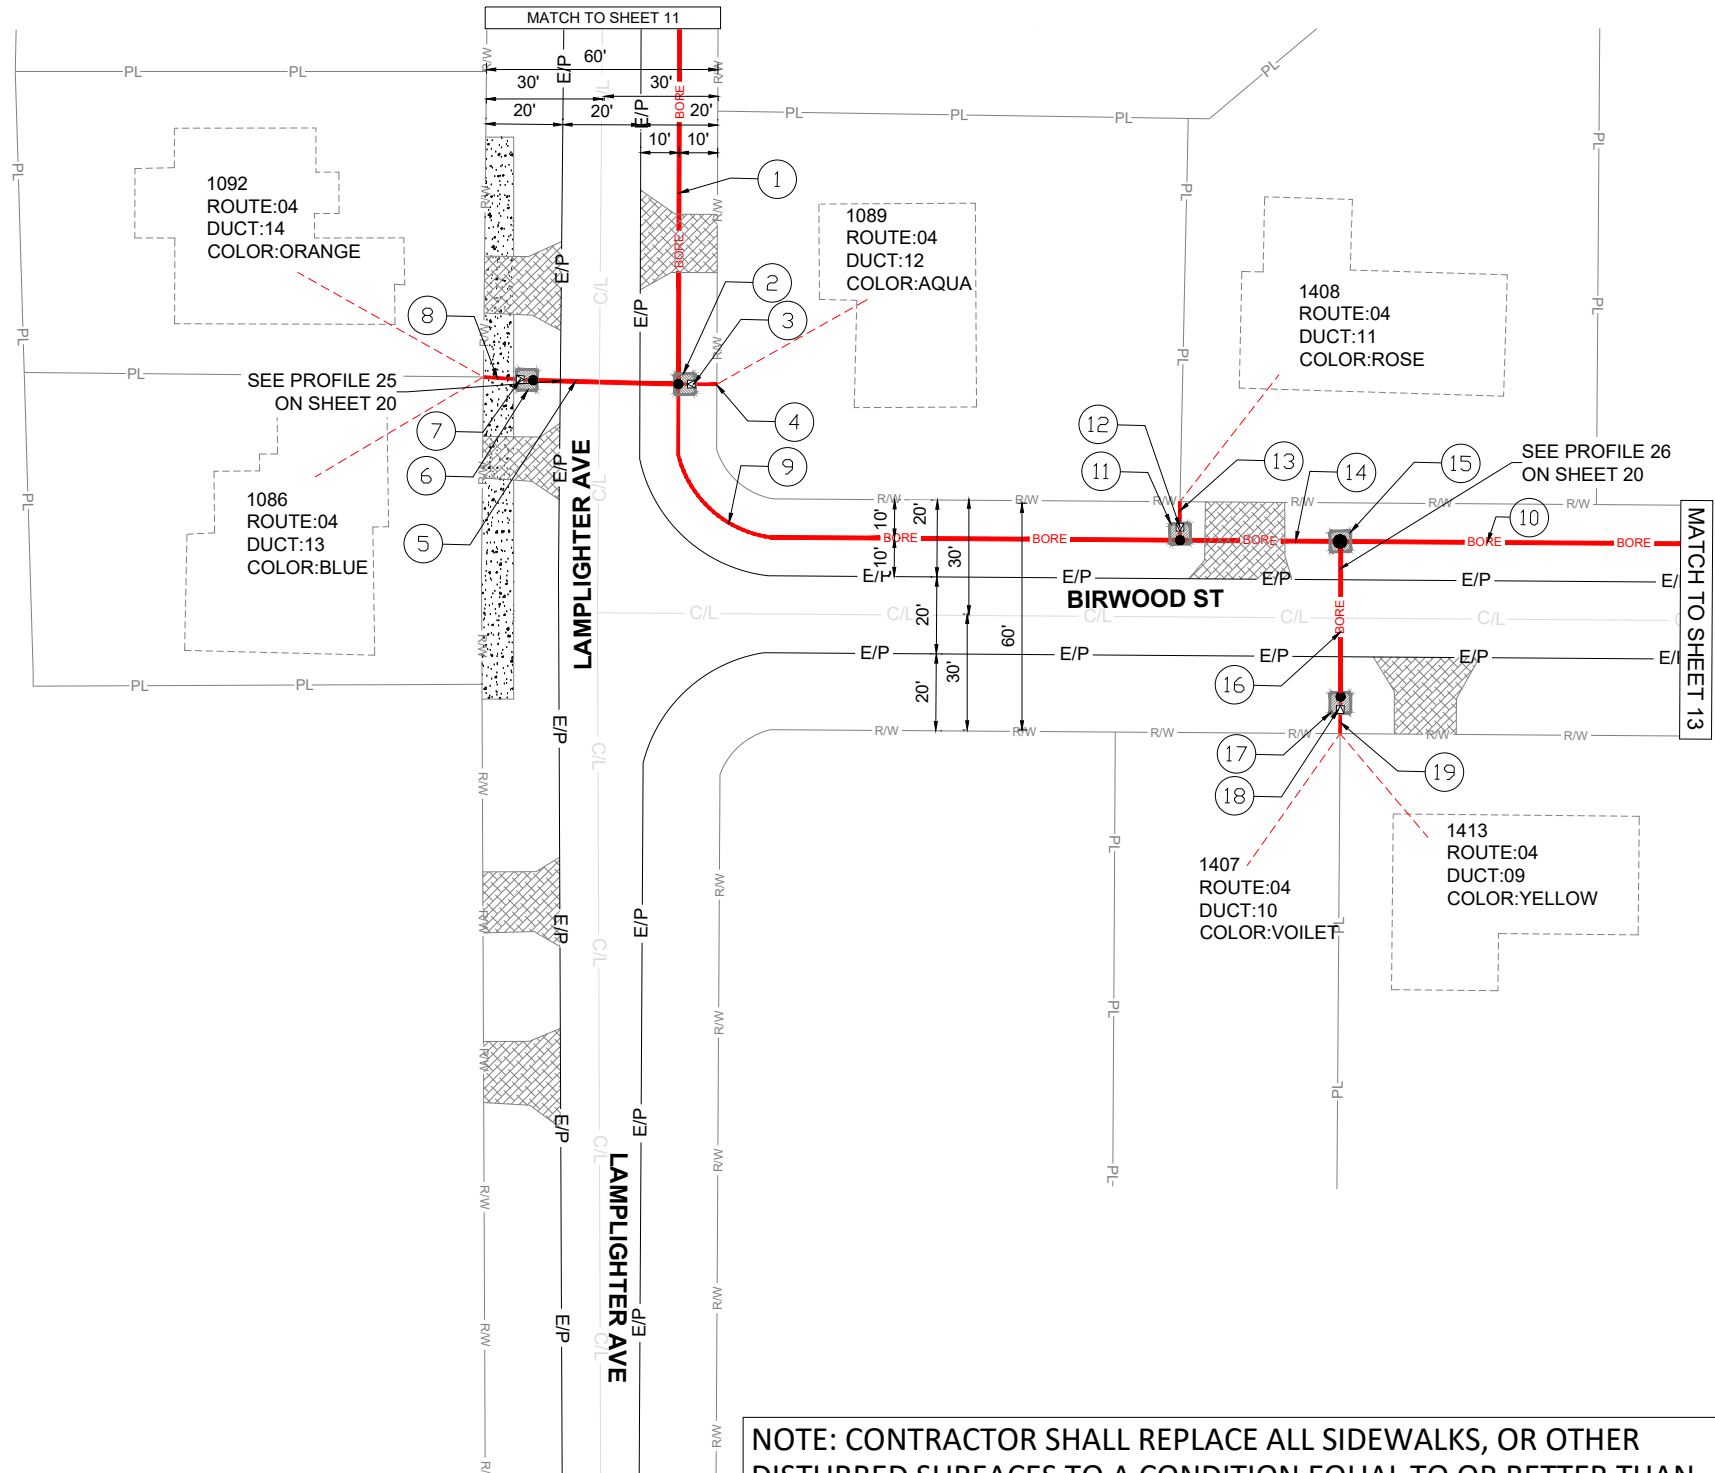

FIBER CORE UNIT (FCU)	
ITEMS	QUANTITY
D-BORE UP TO 2.5" DIA	432'
D-BORE 2.5"-3.5" DIA	00'
D-BORE 3.5"-4.5" DIA	00'
D-BORE 4.5"-7.0" DIA	00'
HAND DIG 24"-36" COVER	40'
TOTAL UG FOOTAGE	472'
HEX-1-WAY	00'
HEX-2-WAY	120'
HEX-12-WAY	202'
HEX-24-WAY	150'
TOBY BOX	4
SPLICE DAP	5

PERMITTING
AGENCY

CITY OF
DELTONA

SCALE: 1" : 40'

CONSTRUCTION DWG.

EXCAVATION DATA

PROPOSED UTILITY	DIRT
(5) 4'X4' PIT	80 SQ. FT.

811

Know what's below.
Call before you dig.

CALL 811 BEFORE YOU DIG.
FLORIDA TOLL FREE
800-432-4770

Tillman FiberCo.

Florida, LLC

MasTec

Communications Group

EXISTING UTILITIES SHOWN ARE APPROXIMATE ONLY AND BASED ON AVAILABLE RECORDS AND FIELD OBSERVATIONS. CONTRACTOR IS RESPONSIBLE FOR CALLING 811 AT LEAST 48 HOURS PRIOR TO ANY EXCAVATION. CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS TO PROTECT EXISTING UTILITIES AND ANY DAMAGE TO THE UTILITIES SHALL BE IMMEDIATELY REPAIRED AT THE CONTRACTOR'S EXPENSE.

REVISION DATA

----	-----	
----	-----	
----	-----	
----	-----	

PROJECT NAME : D-HDT221

DRAWN BY: MASTEC

SHEET 12

- 1

BORE & PLACE (153')
RT4-HEX-12-WAY
- 2

DIG 4'X4' PIT
DAP
STA.16+88
- 3

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES 1418 & 1426
BIRWOOD ST
28.89313, -81.23450190
- 4

HAND DIG & PLACE (10')
RT4-HEX-2-WAY
- 5

BORE & PLACE (15')
RT4-HEX-12-WAY
- 6

DIG 4'X4' PIT
DAP
STA.17+42
- 7

BORE & PLACE (40')
RT4-HEX-2-WAY
- 8

DIG 4'X4' PIT
DAP
STA.17+43
- 9

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES 1419 & 1423
BIRWOOD ST
28.893051, -81.234525
- 10


HAND DIG & PLACE (10')
RT4-HEX-2-WAY
- 11

BORE & PLACE (142')
RT4-HEX-2-WAY
- 12

DIG 4'X4' PIT
DAP
STA.18+45
- 13

PL. NEW TOBY BOX IN 4'X4'
PIT SERVES 1432 & 1440
BIRWOOD ST
28.89311, -81.234047
- 14

HAND DIG & PLACE (10')
RT4-HEX-2-WAY

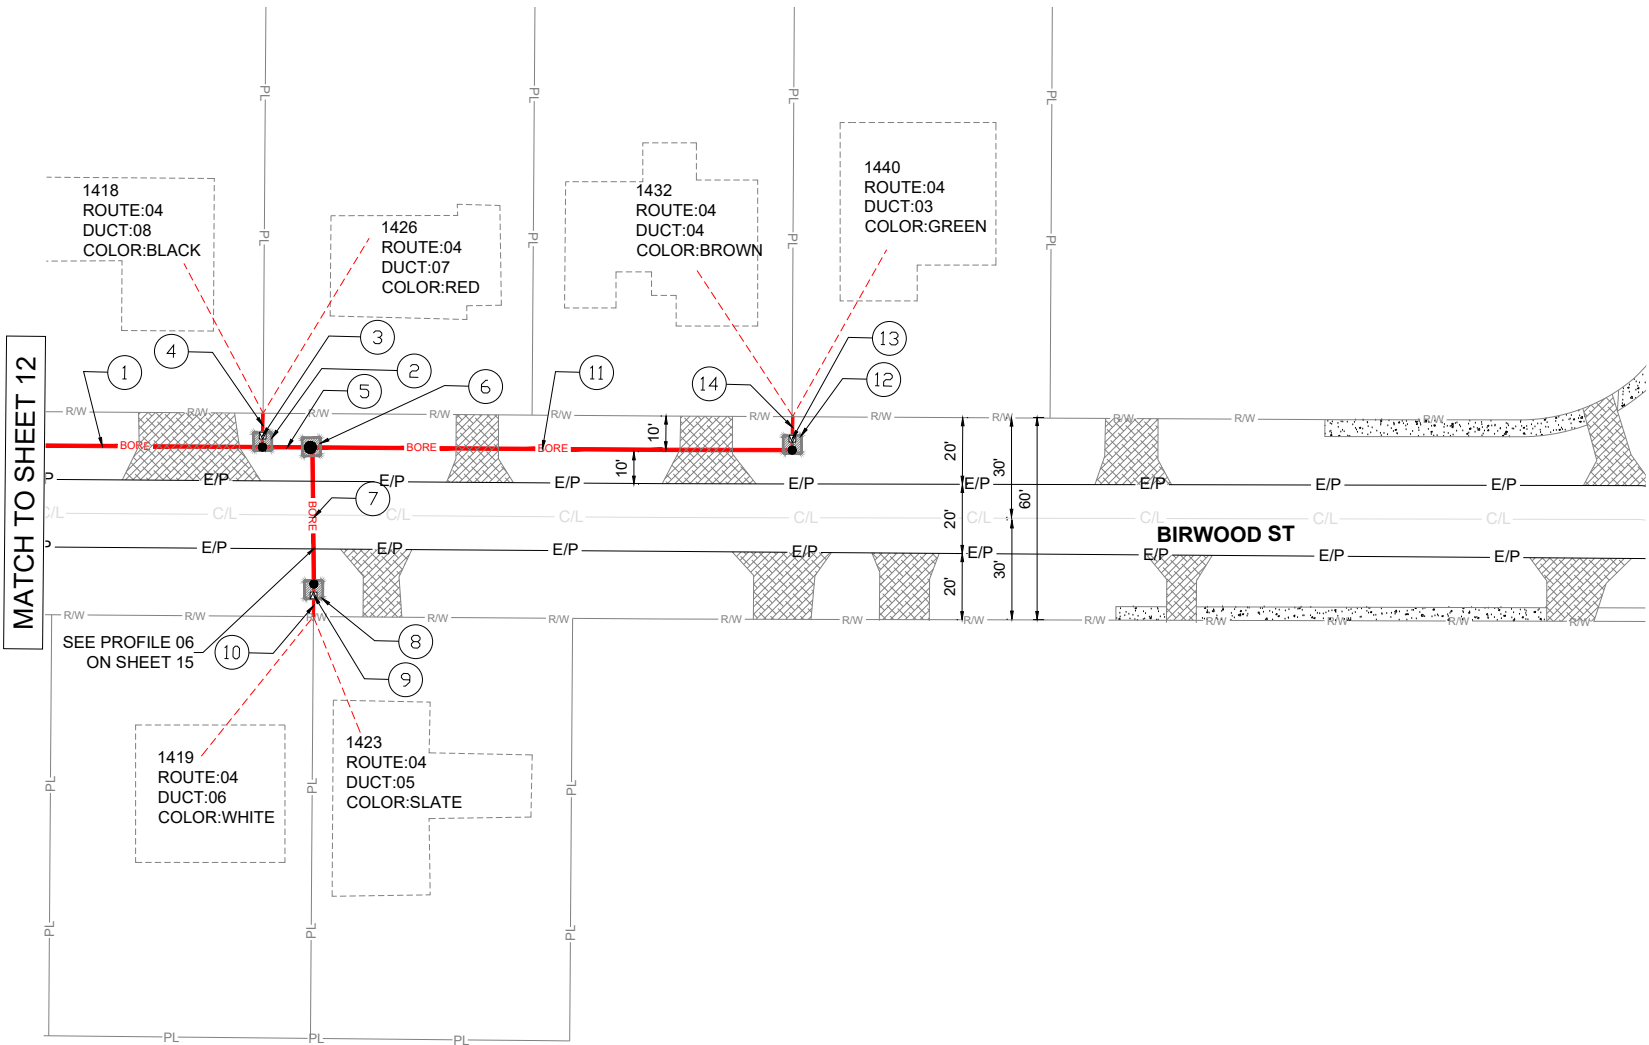

NOTE: CONTRACTOR SHALL REPLACE ALL SIDEWALKS, OR OTHER DISTURBED SURFACES TO A CONDITION EQUAL TO OR BETTER THAN THE PRIOR EXISTING CONDITIONS.

FIBER CORE UNIT (FCU)	
ITEMS	QUANTITY
D-BORE UP TO 2.5" DIA	350'
D-BORE 2.5"-3.5" DIA	00'
D-BORE 3.5"-4.5" DIA	00'
D-BORE 4.5"-7.0" DIA	00'
HAND DIG 24"-36" COVER	30'
TOTAL UG FOOTAGE	380'
HEX-1-WAY	00'
HEX-2-WAY	212'
HEX-12-WAY	168'
HEX-24-WAY	00'
TOBY BOX	3
SPLICE DAP	4

PERMITTING
AGENCY

CITY OF
DELTONA



SCALE: 1" : 40'

CONSTRUCTION DWG.

EXCAVATION DATA	
PROPOSED UTILITY (4) 4'X4' PIT	DIRT 64 SQ. FT.



CALL 811 BEFORE YOU DIG.
FLORIDA TOLL FREE
800-432-4770



EXISTING UTILITIES SHOWN ARE APPROXIMATE ONLY AND BASED ON AVAILABLE RECORDS AND FIELD OBSERVATIONS. CONTRACTOR IS RESPONSIBLE FOR CALLING 811 AT LEAST 48 HOURS PRIOR TO ANY EXCAVATION. CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS TO PROTECT EXISTING UTILITIES AND ANY DAMAGE TO THE UTILITIES SHALL BE IMMEDIATELY REPAIRED AT THE CONTRACTOR'S EXPENSE.

REVISION DATA		
----	-----	
----	-----	
----	-----	
----	-----	

PROJECT NAME : D-HDT221

DRAWN BY: MASTEC

SHEET 13

BORE PROFILES


PERMITTING
AGENCY

CITY OF
DELTONA

SCALE
HORIZONTAL: 1" : 40'
VERTICAL: 1" : 4'


CONSTRUCTION DWG.

PROFILE: 1
PLAN SHEET: 05

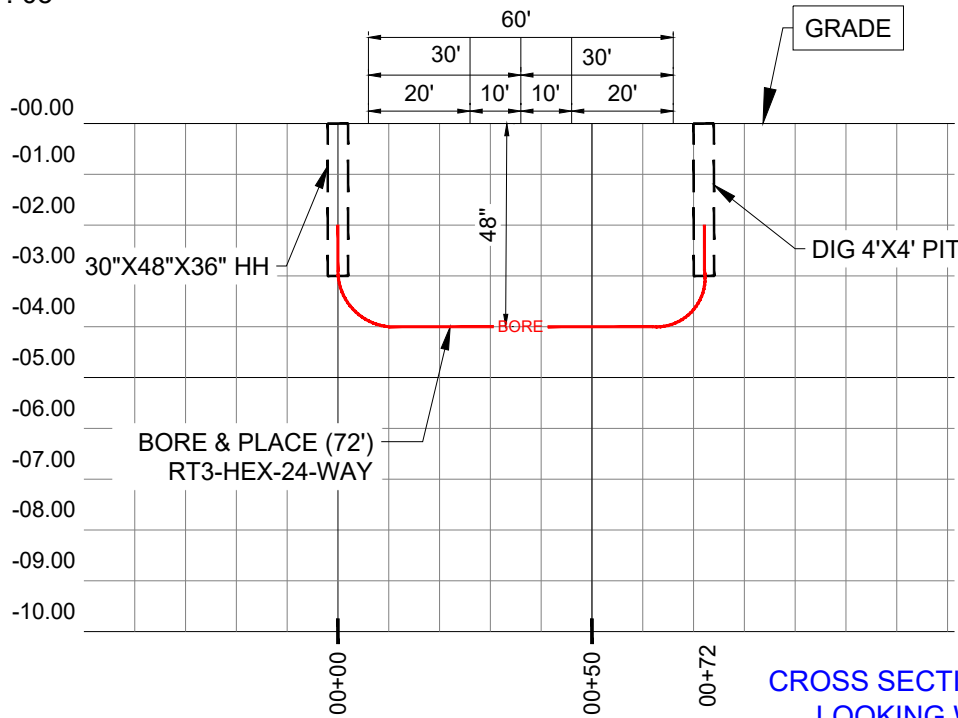


CROSS SECTION VIEW
LOOKING WEST
(RENTON ST)

PROFILE: 2
PLAN SHEET: 05

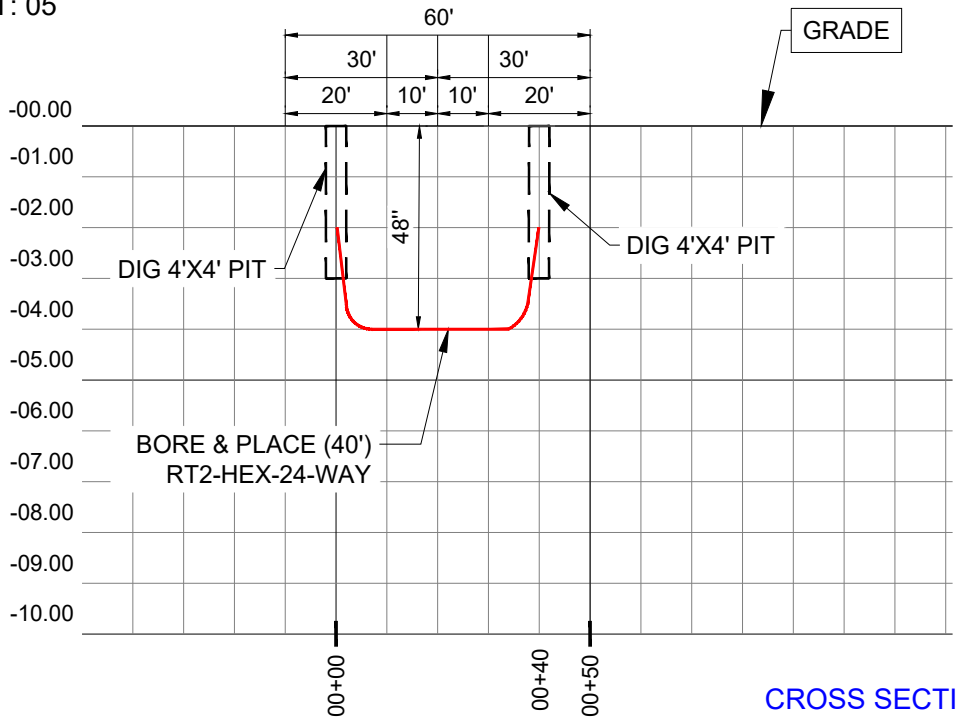


CROSS SECTION VIEW
LOOKING WEST
(RENTON ST)

PROFILE: 3
PLAN SHEET: 06

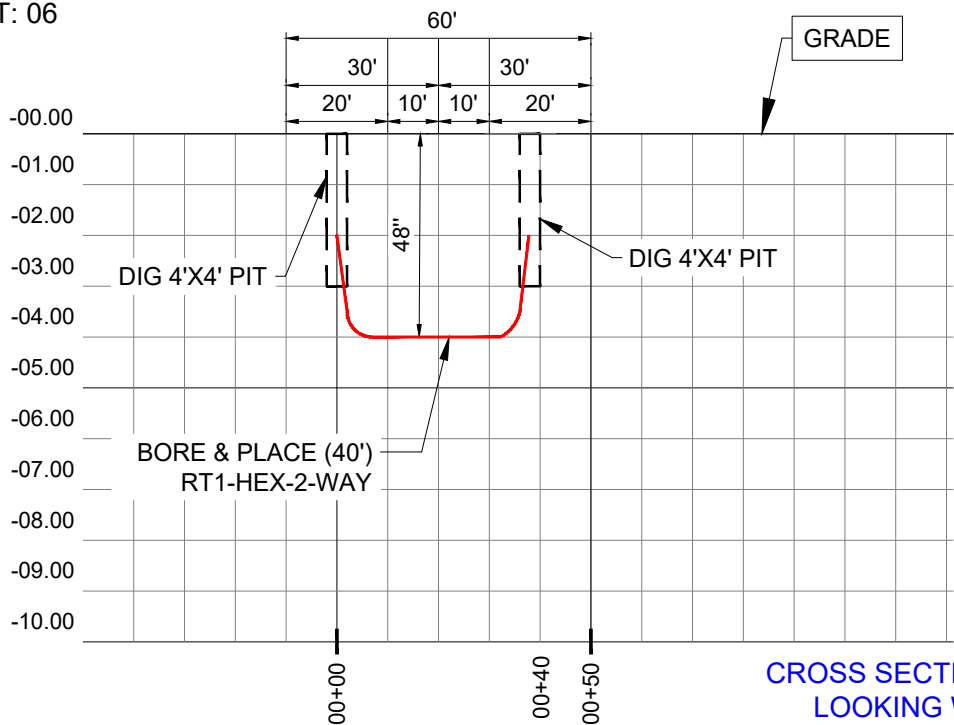

CROSS SECTION VIEW
LOOKING WEST
(RENTON ST)

PROFILE: 4
PLAN SHEET: 06

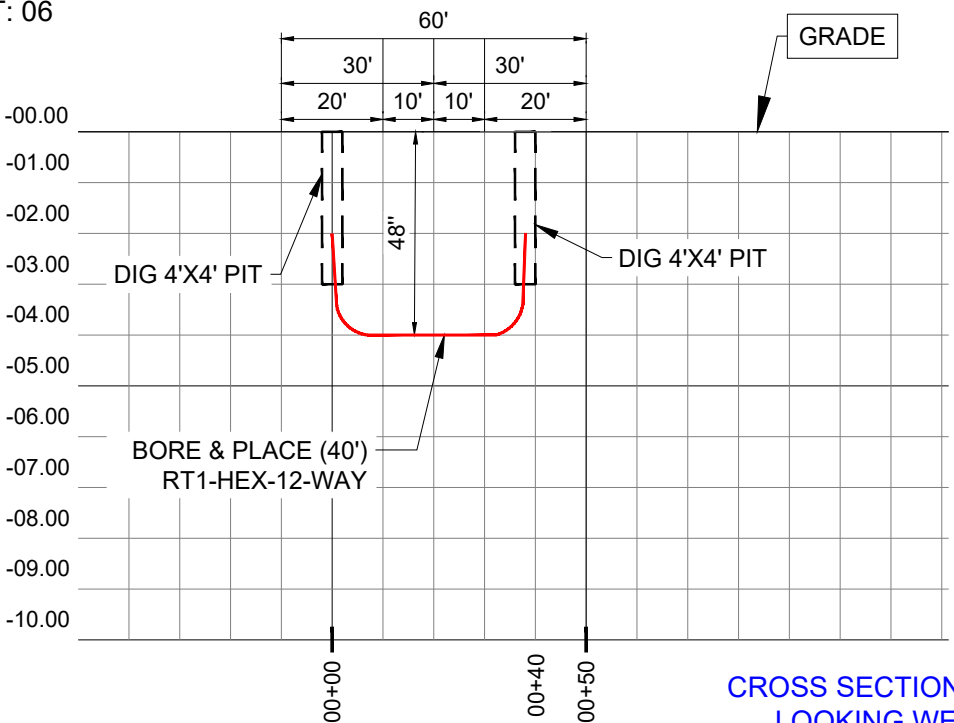

CROSS SECTION VIEW
LOOKING WEST
(RENTON ST)



CALL 811 BEFORE YOU DIG.
FLORIDA TOLL FREE
800-432-4770



Tillman FiberCo.
Florida, LLC

MasTec
Communications Group

EXISTING UTILITIES SHOWN ARE APPROXIMATE ONLY AND BASED ON AVAILABLE RECORDS AND FIELD OBSERVATIONS. CONTRACTOR IS RESPONSIBLE FOR CALLING 811 AT LEAST 48 HOURS PRIOR TO ANY EXCAVATION. CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS TO PROTECT EXISTING UTILITIES AND ANY DAMAGE TO THE UTILITIES SHALL BE IMMEDIATELY REPAIRED AT THE CONTRACTOR'S EXPENSE.

REVISION DATA

----	-----	
----	-----	
----	-----	
----	-----	

PROJECT NAME : D-HDT221

DRAWN BY: MASTEC

SHEET 14

BORE PROFILES


PERMITTING
AGENCY

CITY OF
DELTONA


SCALE
HORIZONTAL: 1" : 40'
VERTICAL: 1" : 4'

CONSTRUCTION DWG.


PROFILE: 5
PLAN SHEET: 06

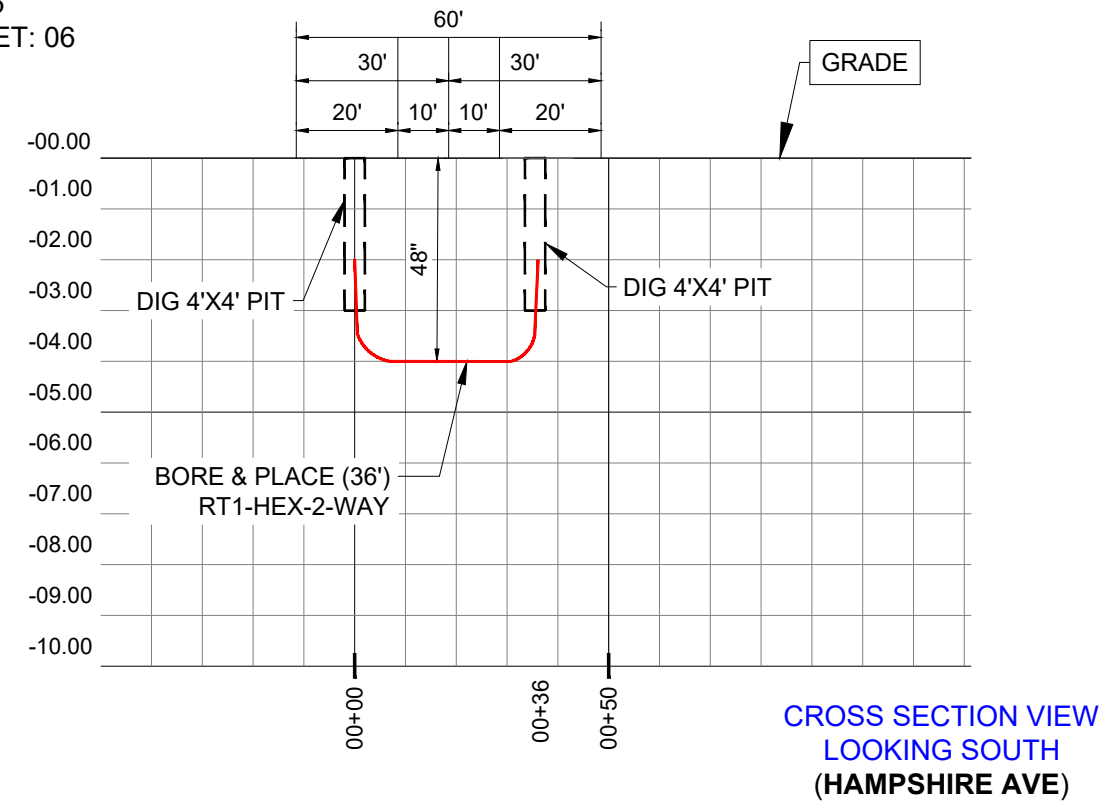


PROFILE: 06
PLAN SHEET: 13

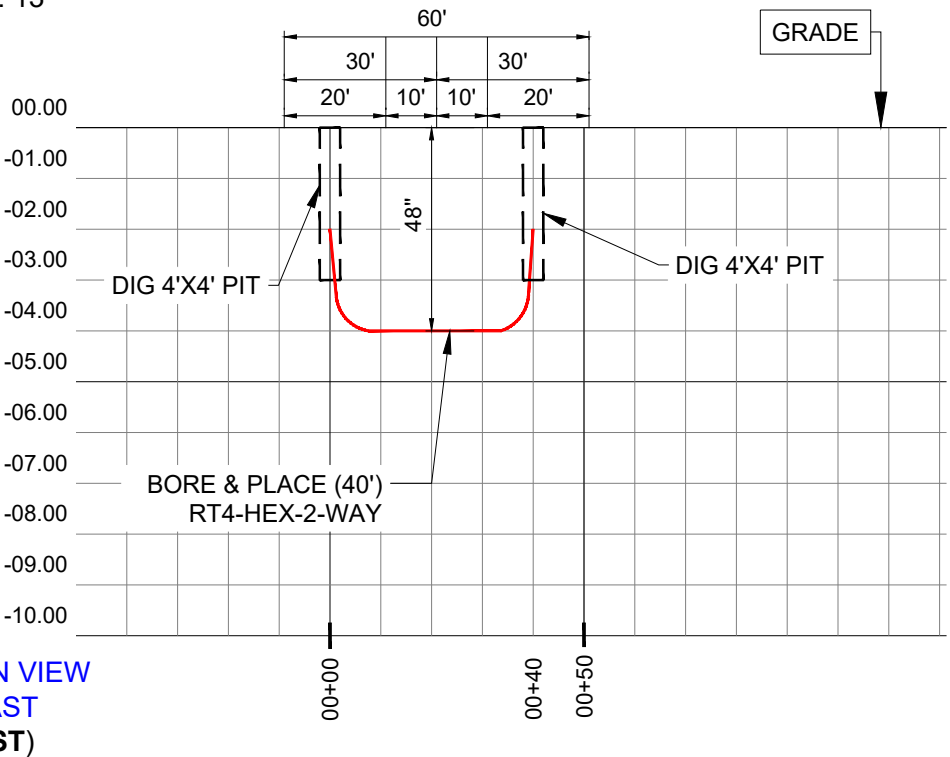

PROFILE: 7
PLAN SHEET: 07

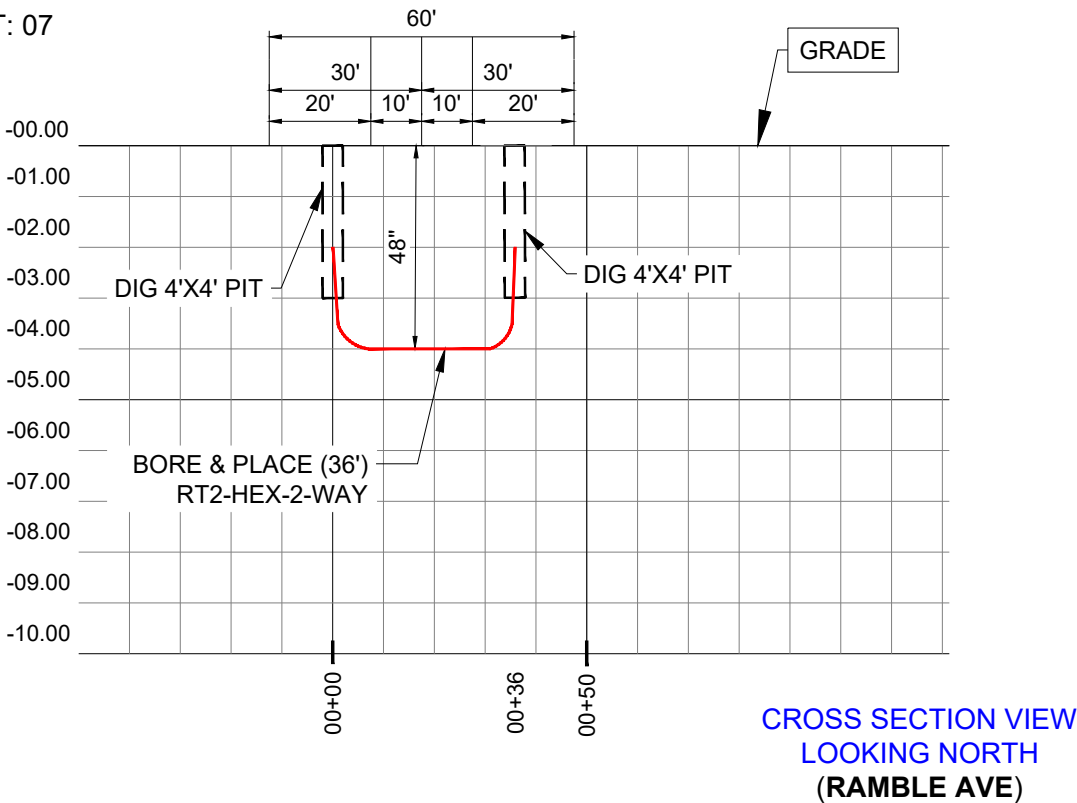

PROFILE: 8
PLAN SHEET: 07

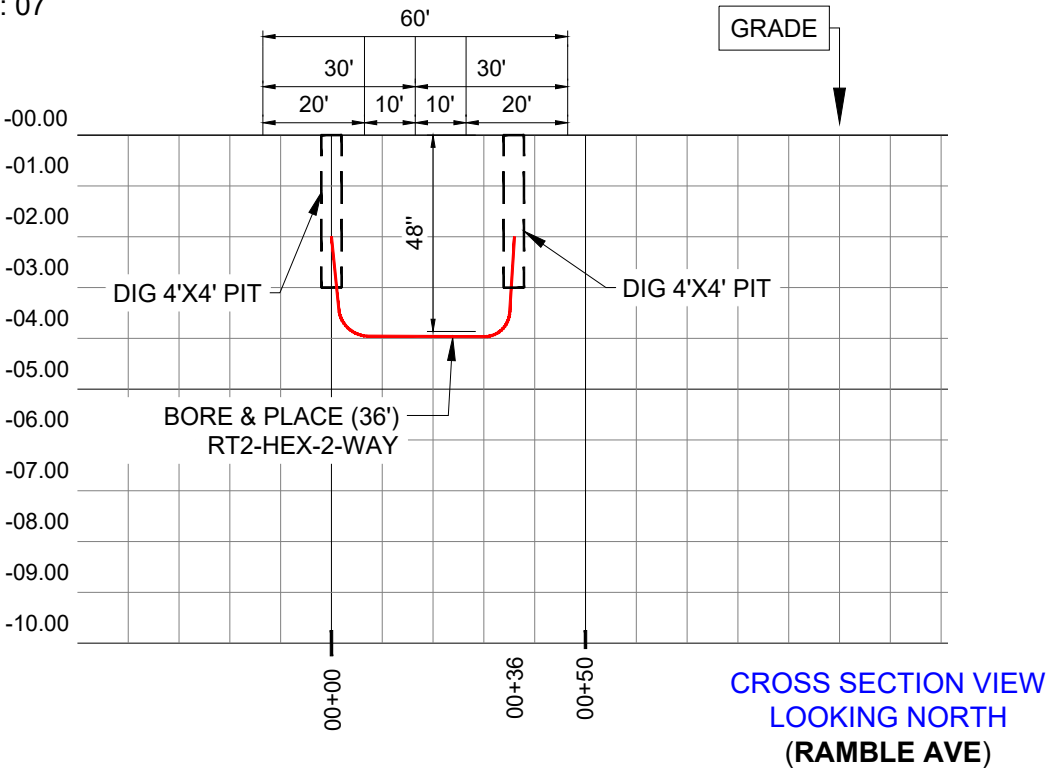

CALL 811 BEFORE YOU DIG.
FLORIDA TOLL FREE
800-432-4770



Tillman FiberCo.
Florida, LLC

MasTec
Communications Group

EXISTING UTILITIES SHOWN ARE APPROXIMATE ONLY AND BASED ON AVAILABLE RECORDS AND FIELD OBSERVATIONS. CONTRACTOR IS RESPONSIBLE FOR CALLING 811 AT LEAST 48 HOURS PRIOR TO ANY EXCAVATION. CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS TO PROTECT EXISTING UTILITIES AND ANY DAMAGE TO THE UTILITIES SHALL BE IMMEDIATELY REPAIRED AT THE CONTRACTOR'S EXPENSE.

REVISION DATA

----	-----	
----	-----	
----	-----	
----	-----	

PROJECT NAME : D-HDT221

DRAWN BY: MASTEC

SHEET 15

BORE PROFILES


PERMITTING
AGENCY

CITY OF
DELTONA


SCALE
HORIZONTAL: 1" : 40'
VERTICAL: 1" : 4'

CONSTRUCTION DWG.


PROFILE: 09
PLAN SHEET: 07

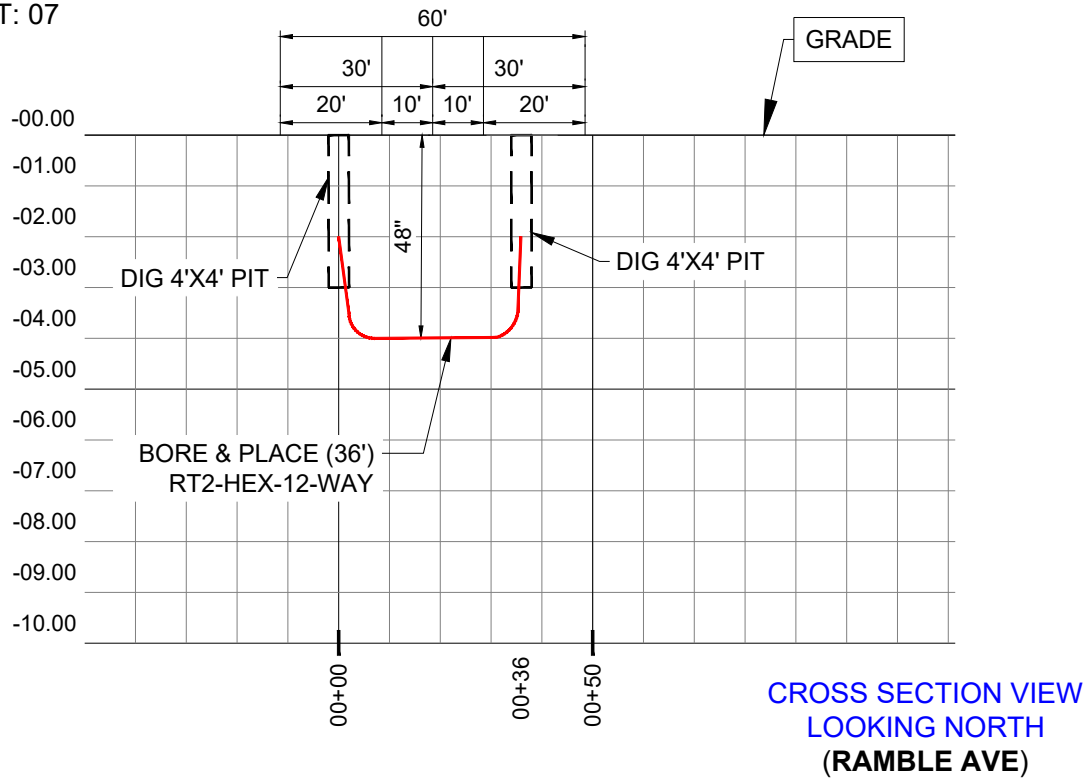


PROFILE: 10
PLAN SHEET: 07

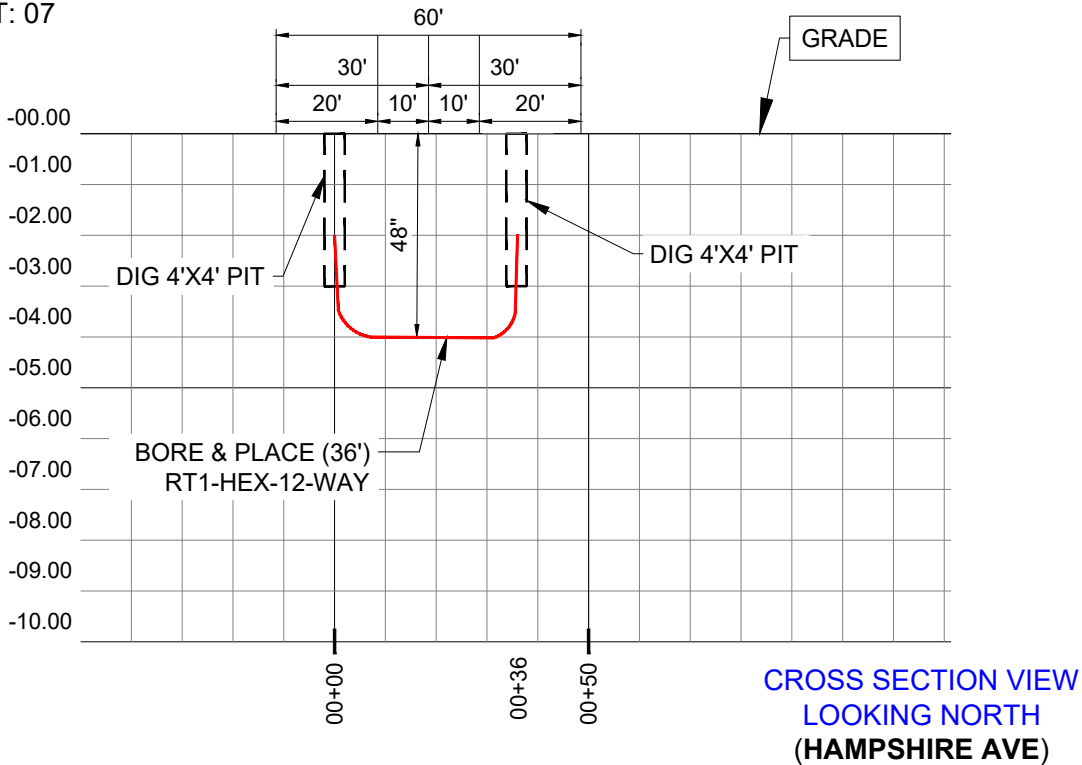

PROFILE: 11
PLAN SHEET: 8

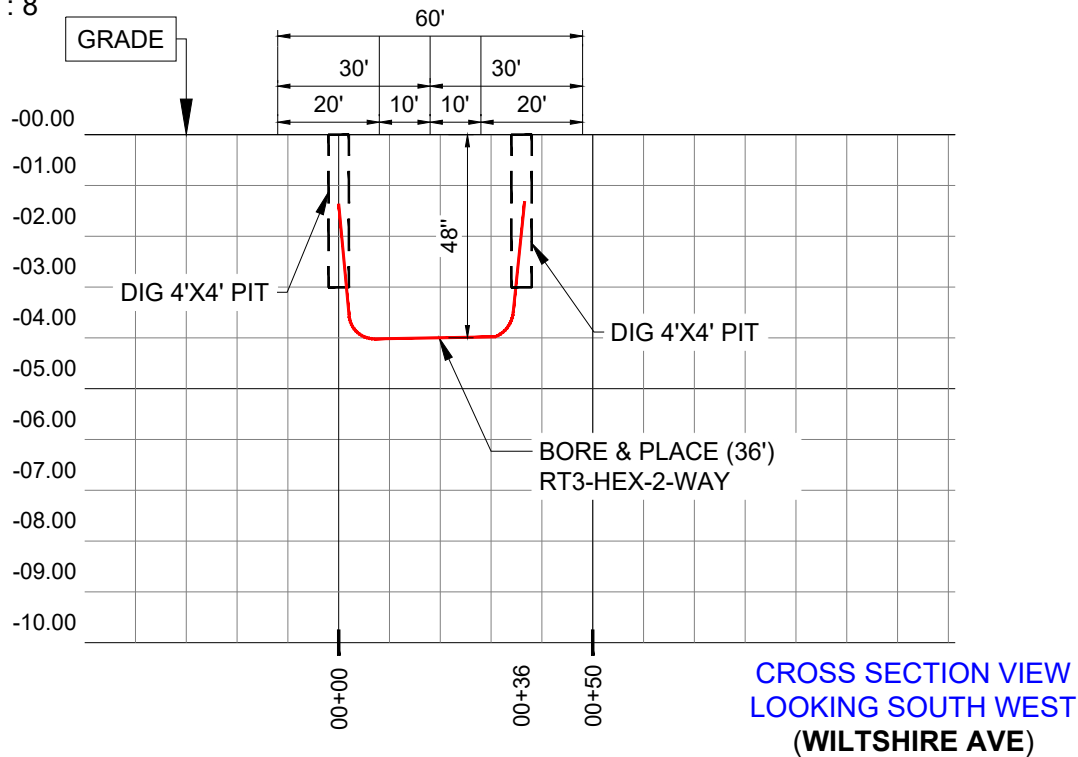

PROFILE: 12
PLAN SHEET: 08

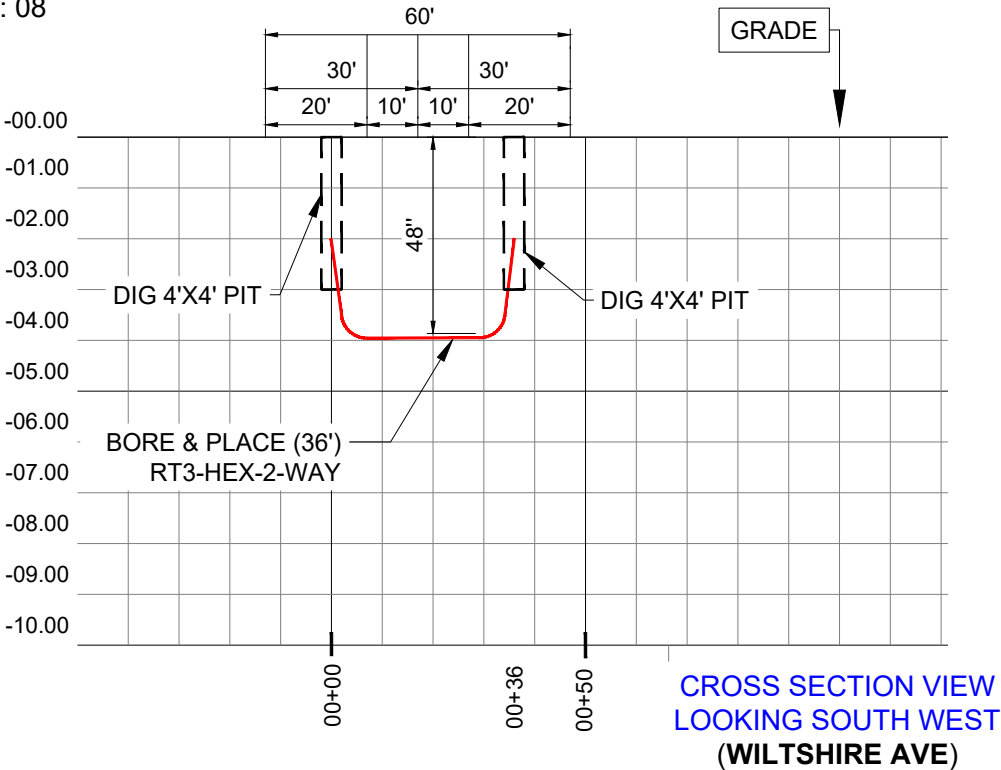

CALL 811 BEFORE YOU DIG.
FLORIDA TOLL FREE
800-432-4770



Tillman FiberCo.
Florida, LLC

MasTec
Communications Group

EXISTING UTILITIES SHOWN ARE APPROXIMATE ONLY AND BASED ON AVAILABLE RECORDS AND FIELD OBSERVATIONS. CONTRACTOR IS RESPONSIBLE FOR CALLING 811 AT LEAST 48 HOURS PRIOR TO ANY EXCAVATION. CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS TO PROTECT EXISTING UTILITIES AND ANY DAMAGE TO THE UTILITIES SHALL BE IMMEDIATELY REPAIRED AT THE CONTRACTOR'S EXPENSE.

REVISION DATA

----	-----	
----	-----	
----	-----	
----	-----	

PROJECT NAME : D-HDT221

DRAWN BY: MASTEC

SHEET 16

BORE PROFILES


PERMITTING
AGENCY

CITY OF
DELTONA

SCALE
HORIZONTAL: 1" : 40'
VERTICAL: 1" : 4'


CONSTRUCTION DWG.

PROFILE: 13
PLAN SHEET: 9

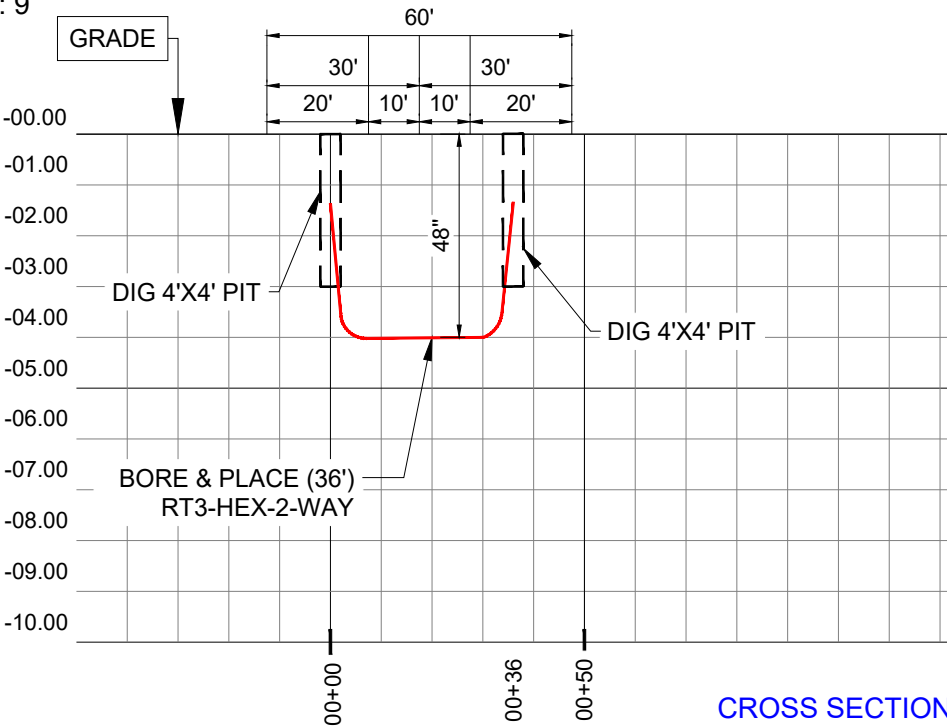


CROSS SECTION VIEW
LOOKING SOUTH WEST
(WILTSHIRE AVE)

PROFILE: 14
PLAN SHEET: 09

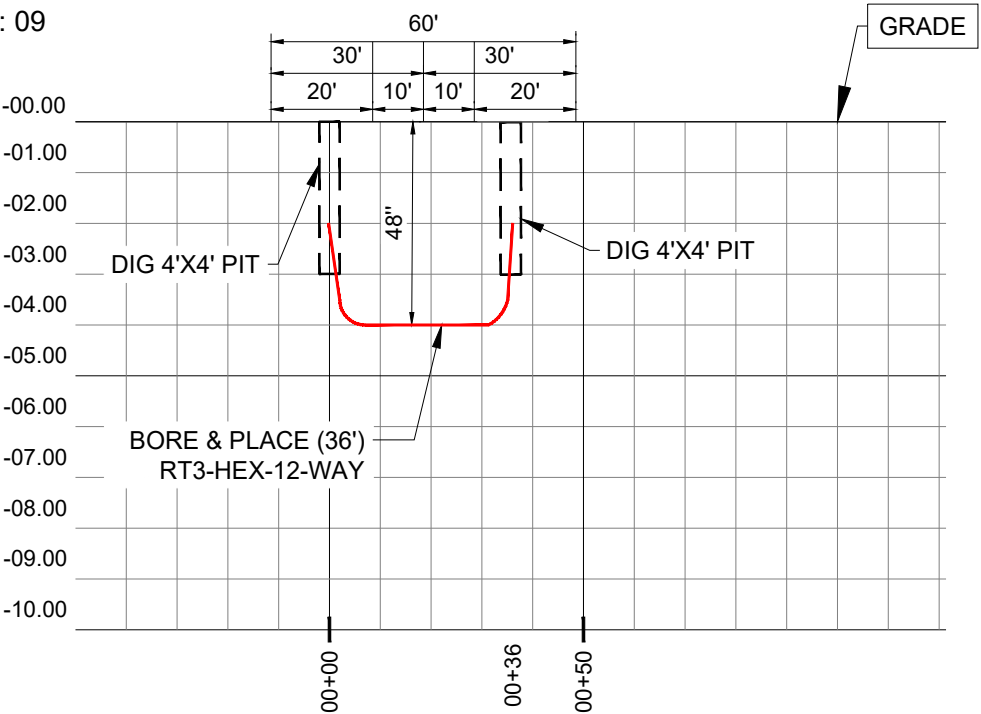


CROSS SECTION VIEW
LOOKING WEST
(WILTSHIRE AVE)

PROFILE: 15
PLAN SHEET: 9

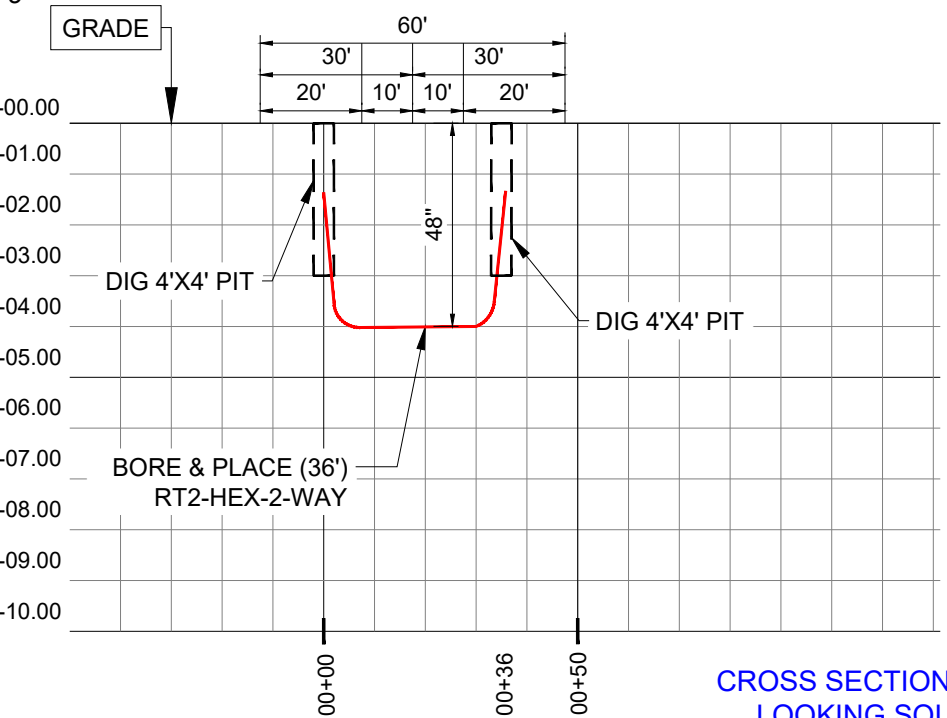

CROSS SECTION VIEW
LOOKING SOUTH
(RAMBLE AVE)

PROFILE: 16
PLAN SHEET: 10

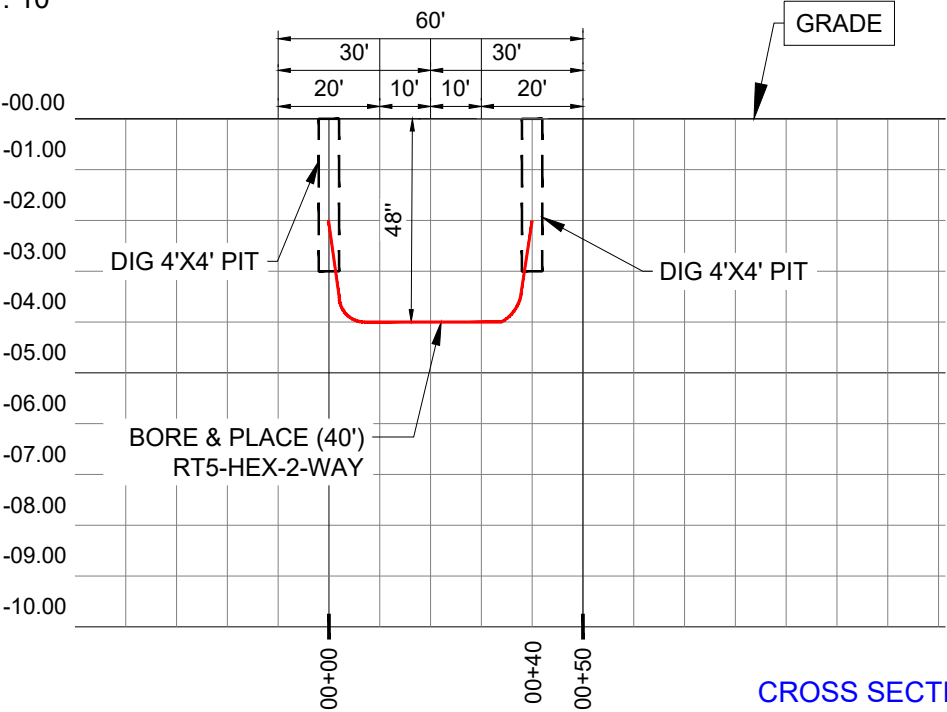

CROSS SECTION VIEW
LOOKING WEST
(HOLLYHOCK ST)



CALL 811 BEFORE YOU DIG.
FLORIDA TOLL FREE
800-432-4770



Tillman FiberCo.
Florida, LLC

MasTec
Communications Group

EXISTING UTILITIES SHOWN ARE APPROXIMATE ONLY AND BASED ON AVAILABLE RECORDS AND FIELD OBSERVATIONS. CONTRACTOR IS RESPONSIBLE FOR CALLING 811 AT LEAST 48 HOURS PRIOR TO ANY EXCAVATION. CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS TO PROTECT EXISTING UTILITIES AND ANY DAMAGE TO THE UTILITIES SHALL BE IMMEDIATELY REPAIRED AT THE CONTRACTOR'S EXPENSE.

REVISION DATA

----	-----	
----	-----	
----	-----	
----	-----	


PROJECT NAME : D-HDT221

DRAWN BY: MASTEC

SHEET 17


BORE PROFILES

PROFILE: 17
PLAN SHEET: 10

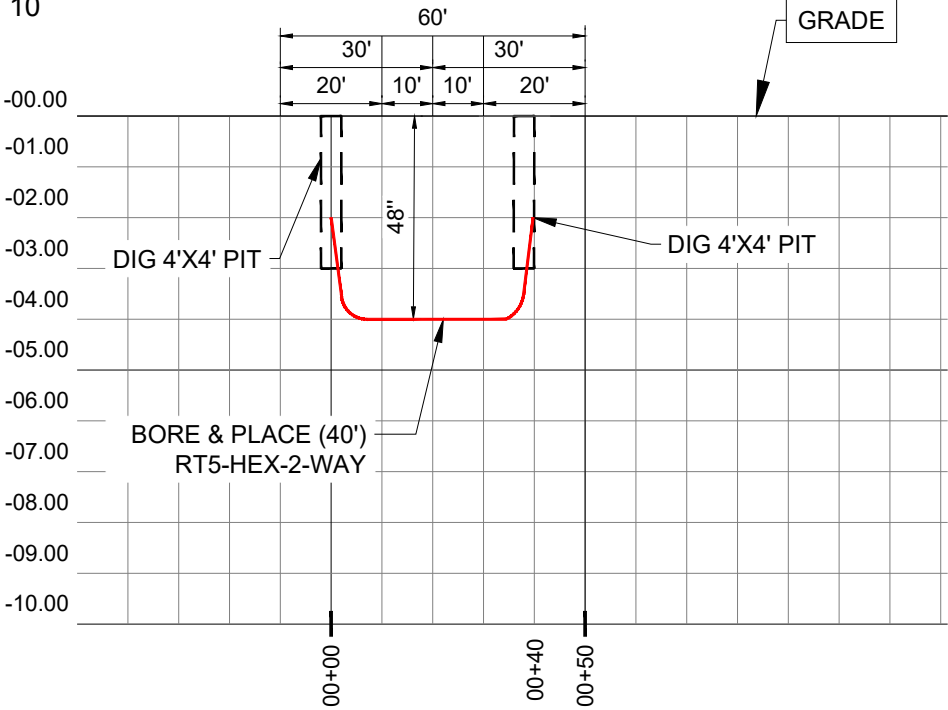


CROSS SECTION VIEW
LOOKING WEST
(HOLLYHOCK ST)

PROFILE: 18
PLAN SHEET: 10

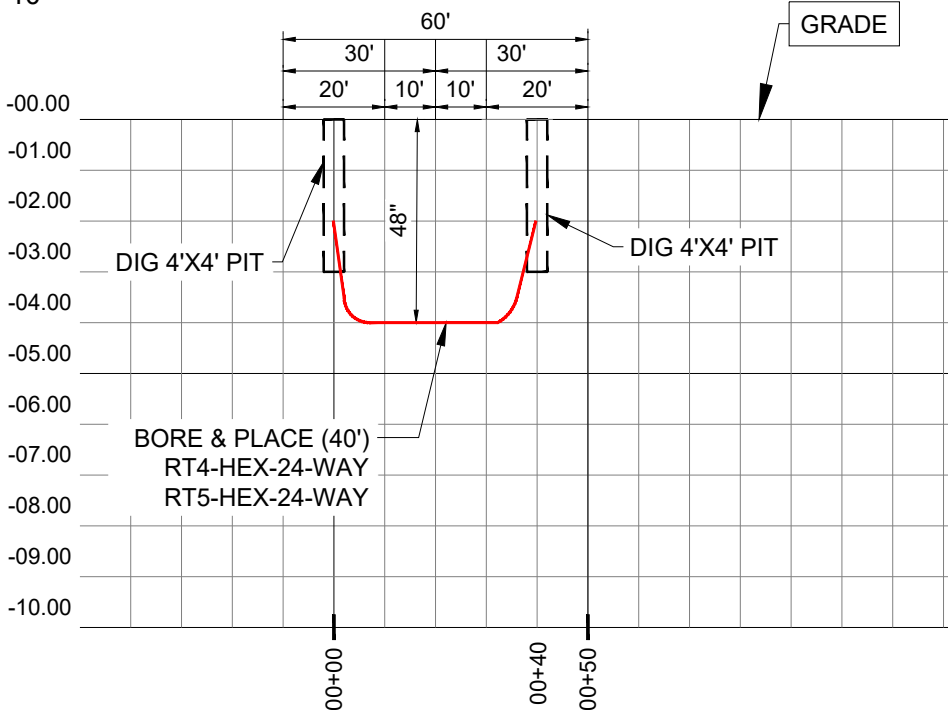


CROSS SECTION VIEW
LOOKING EAST
(HOLLYHOCK ST)

PROFILE: 19
PLAN SHEET: 10

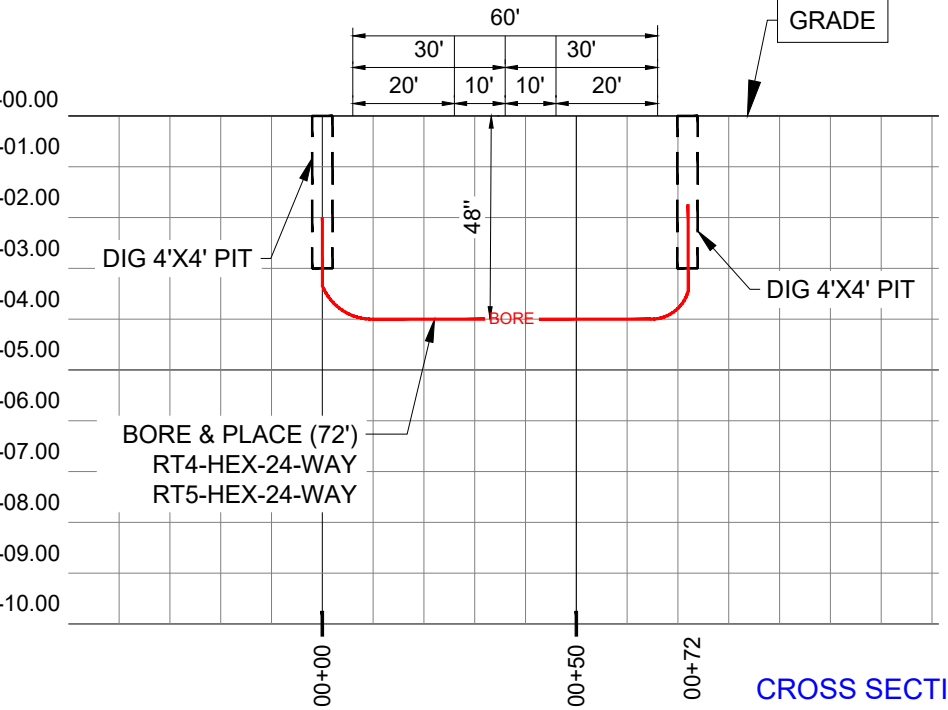

CROSS SECTION VIEW
LOOKING SOUTH
(SAXON BLVD)

PROFILE: 20
PLAN SHEET: 11

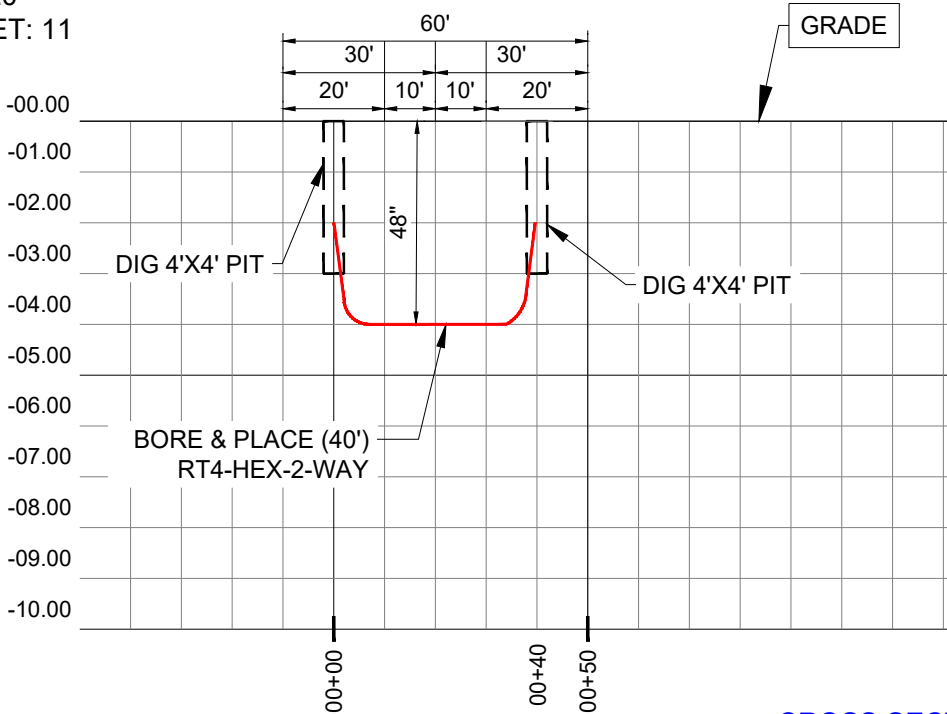

CROSS SECTION VIEW
LOOKING WEST
(HOLLYHOCK ST)

PERMITTING
AGENCY

CITY OF
DELTONA

SCALE
HORIZONTAL: 1" : 40'
VERTICAL: 1" : 4'

CONSTRUCTION DWG.



CALL 811 BEFORE YOU DIG.
FLORIDA TOLL FREE
800-432-4770



Tillman FiberCo.
Florida, LLC


MasTec
Communications Group

EXISTING UTILITIES SHOWN ARE APPROXIMATE ONLY AND BASED ON AVAILABLE RECORDS AND FIELD OBSERVATIONS. CONTRACTOR IS RESPONSIBLE FOR CALLING 811 AT LEAST 48 HOURS PRIOR TO ANY EXCAVATION. CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS TO PROTECT EXISTING UTILITIES AND ANY DAMAGE TO THE UTILITIES SHALL BE IMMEDIATELY REPAIRED AT THE CONTRACTOR'S EXPENSE.

REVISION DATA		
----	-----	
----	-----	
----	-----	
----	-----	
PROJECT NAME : D-HDT221		
DRAWN BY: MASTEC		SHEET 18


BORE PROFILES

PROFILE: 21
PLAN SHEET: 10

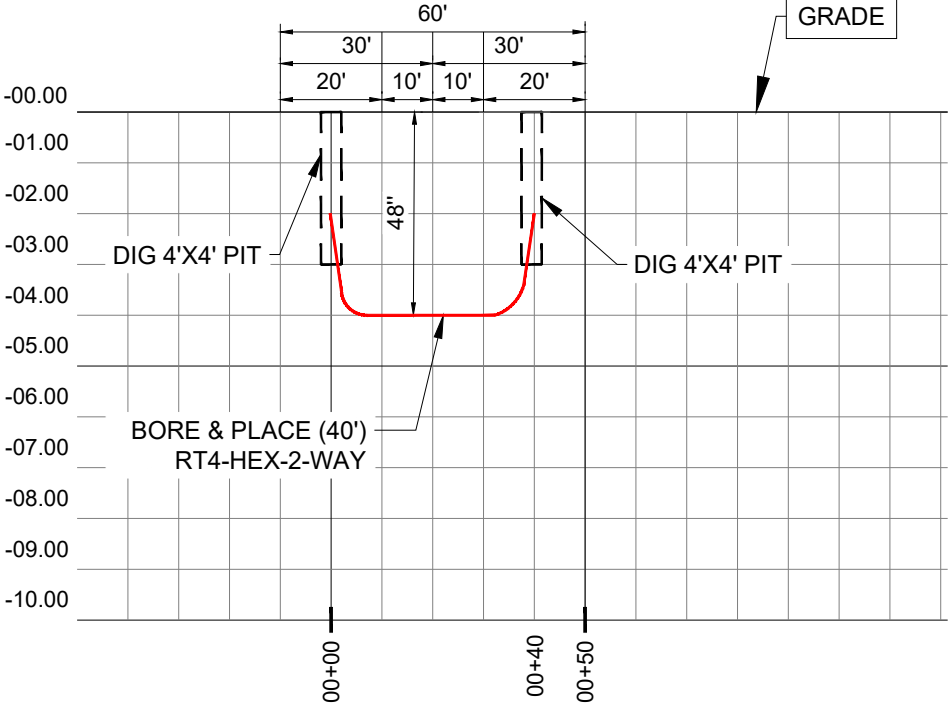


CROSS SECTION VIEW
LOOKING WEST
(HOLLYHOCK ST)

PROFILE: 22
PLAN SHEET: 6

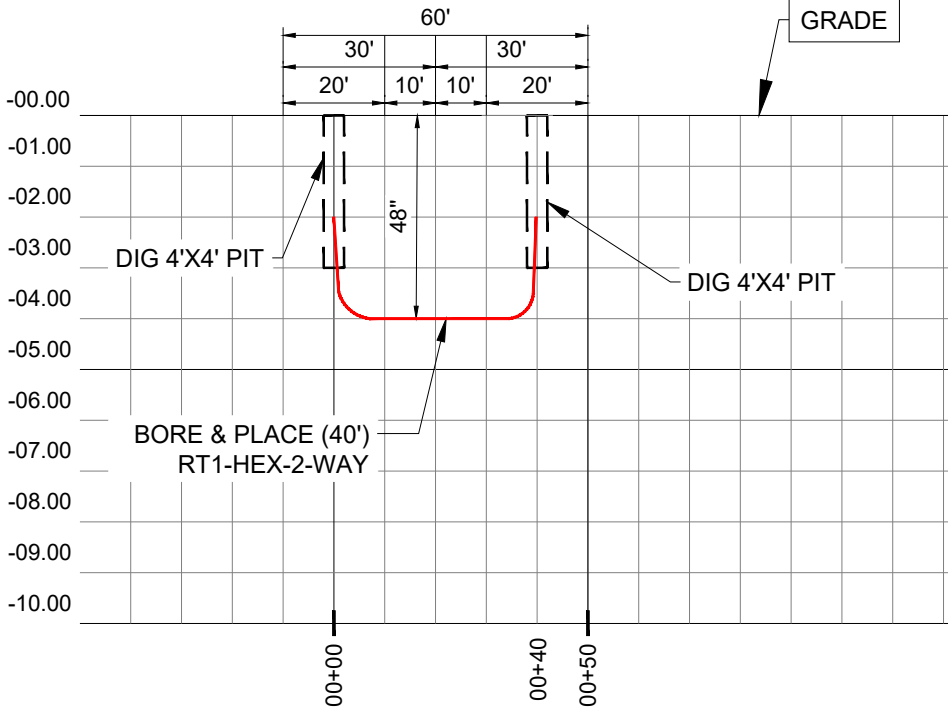


CROSS SECTION VIEW
LOOKING WEST
(RENTON ST)

PROFILE: 23
PLAN SHEET: 11

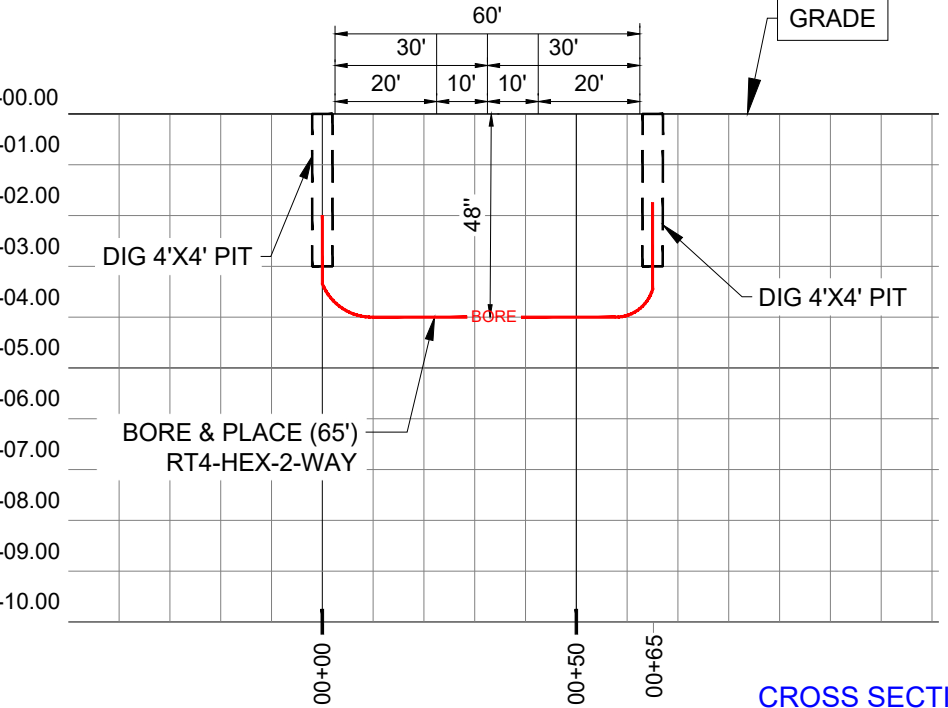

CROSS SECTION VIEW
LOOKING SOUTH WEST
(LAMPLIGHTER AVE)

PROFILE: 24
PLAN SHEET: 11

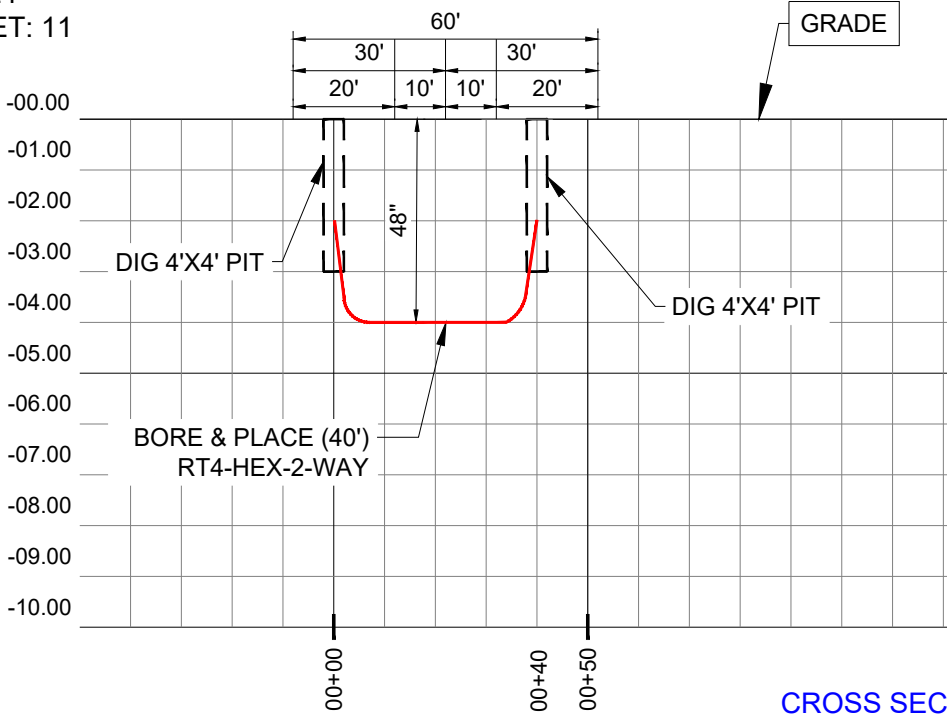

CROSS SECTION VIEW
LOOKING SOUTH
(LAMPLIGHTER AVE)

PERMITTING AGENCY

CITY OF
DELTONA

SCALE
HORIZONTAL: 1" : 40'
VERTICAL: 1" : 4'

CONSTRUCTION DWG.



CALL 811 BEFORE YOU DIG.
FLORIDA TOLL FREE
800-432-4770



Tillman FiberCo.
Florida, LLC

MasTec
Communications Group

EXISTING UTILITIES SHOWN ARE APPROXIMATE ONLY AND BASED ON AVAILABLE RECORDS AND FIELD OBSERVATIONS. CONTRACTOR IS RESPONSIBLE FOR CALLING 811 AT LEAST 48 HOURS PRIOR TO ANY EXCAVATION. CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS TO PROTECT EXISTING UTILITIES AND ANY DAMAGE TO THE UTILITIES SHALL BE IMMEDIATELY REPAIRED AT THE CONTRACTOR'S EXPENSE.

REVISION DATA

----	-----	
----	-----	
----	-----	
----	-----	


PROJECT NAME : D-HDT221

DRAWN BY: MASTEC

SHEET 19


BORE PROFILES

PROFILE: 25
PLAN SHEET: 12

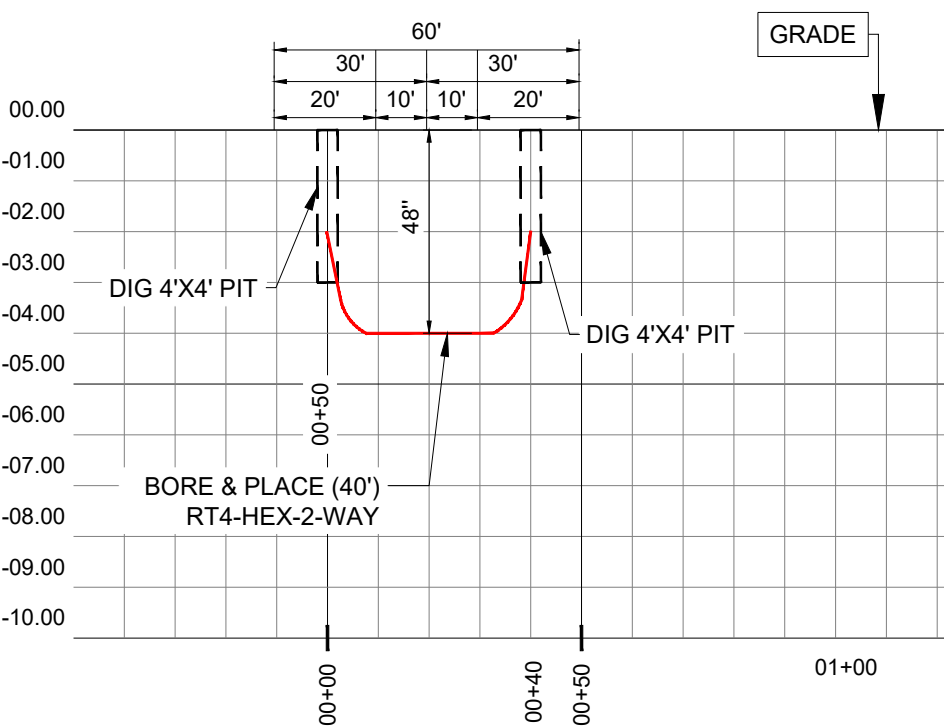

CROSS SECTION VIEW
LOOKING SOUTH
(LAMPLIGHTER AVE)

PROFILE: 26
PLAN SHEET: 12

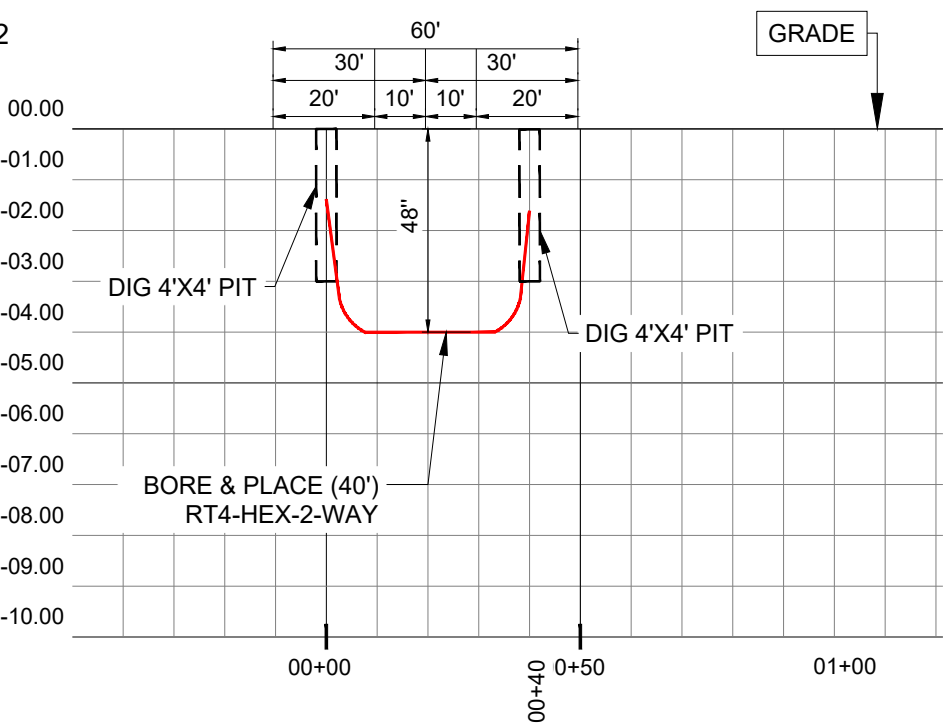

CROSS SECTION VIEW
LOOKING WEST
(BIRWOOD ST)

PERMITTING
AGENCY

CITY OF
DELTONA

SCALE
HORIZONTAL: 1" : 40'
VERTICAL: 1" : 4'

CONSTRUCTION DWG.



CALL 811 BEFORE YOU DIG.
FLORIDA TOLL FREE
800-432-4770



Tillman FiberCo.
Florida, LLC

MasTec
Communications Group

EXISTING UTILITIES SHOWN ARE APPROXIMATE ONLY AND BASED ON AVAILABLE RECORDS AND FIELD OBSERVATIONS. CONTRACTOR IS RESPONSIBLE FOR CALLING 811 AT LEAST 48 HOURS PRIOR TO ANY EXCAVATION. CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS TO PROTECT EXISTING UTILITIES AND ANY DAMAGE TO THE UTILITIES SHALL BE IMMEDIATELY REPAIRED AT THE CONTRACTOR'S EXPENSE.

REVISION DATA		
----	-----	
----	-----	
----	-----	
----	-----	
PROJECT NAME : D-HDT221		
DRAWN BY: MASTEC		SHEET 20


HEXATRONIC PRE-CONFIGURED UNDERGROUND FDH

PERMITTING
AGENCY

CITY OF
DELTONA

SCALE: NONE

CONSTRUCTION DWG.

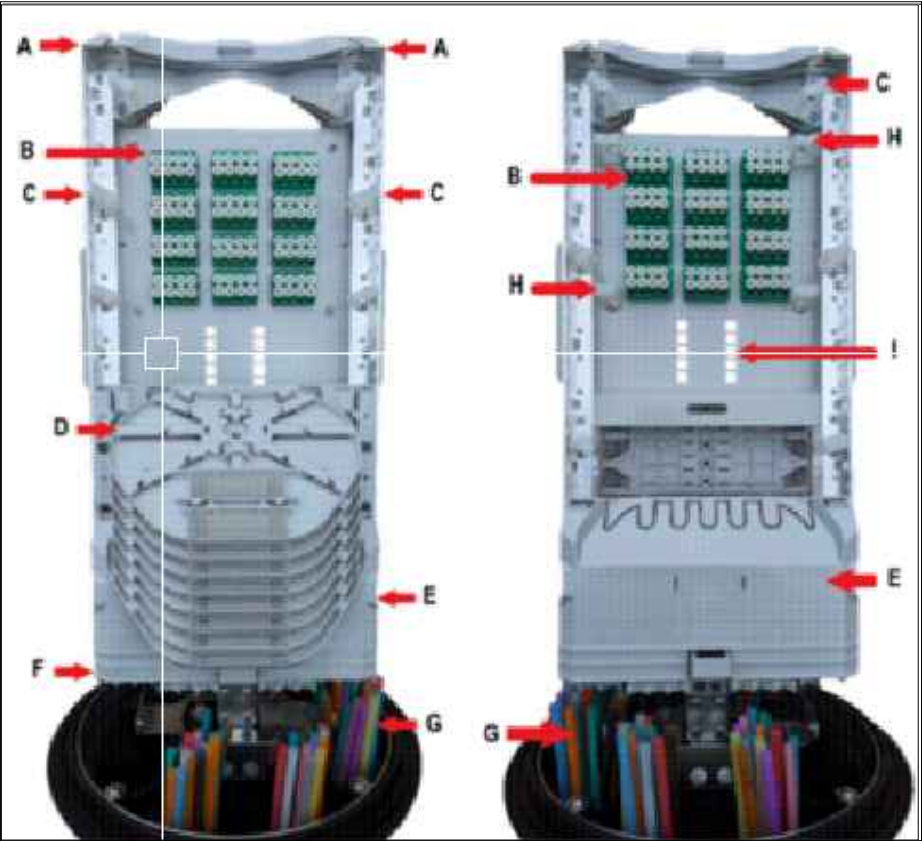

SWING UP ARM AND MOBRA MOUNTING BRACKET

THIS FDH IS MOUNTED ON A SWING ARM IN A 30X48 HANDHOLE



HEIGHT	WIDTH	WEIGHT	COLOR
20.67"	11.22"	6.5 KG/14.3 LBS	BLACK

POSITION	DESCRIPTION
A	STINGRAY FIBER CROSSOVER CHANNELS
B	96 LC/APC ADAPTER PANEL
C	STINGRAY MANAGEMENT RINGS
D	SPLICE CASSETTES 8 X 24 SPLICES
E	SLACK STORAGE
F	STINGRAY FIBER GUIDES
G	5/3.5MM MICRODUCT TAILS
H	SPLITTER SLACK MANAGEMENT RINGS
I	INLINE SPLITTER MOUNTING LOCATION

HANDHOLE SPECIFIC DETAIL ON NEXT SHEET

THE HEXATRONIC PRE-CONFIGURED FDH IS A COMPACT DOME CLOSURE AVAILABLE IN A RANGE OF SIZES AND SPLITTER RATIOS TO SUIT VARIED SPECIFICATIONS. DESIGNED FOR USE WITH HEXATRONIC STINGRAY ABF, THE CLOSURE COMES WITH PRE-TAILED DUCT STUBS TO MAKE CUSTOMER CONNECTIONS AS FAST AS POSSIBLE. FIBER RESTRAINTS WITHIN THE DUCTS SECURE CUSTOMER DROPS TO REDUCE THE RISK OF FIBER CREEPAGE CAUSING BENDS OVER TIME.



CALL 811 BEFORE YOU DIG.
FLORIDA TOLL FREE
800-432-4770



Tillman FiberCo.
Florida, LLC

MasTec
Communications Group

EXISTING UTILITIES SHOWN ARE APPROXIMATE ONLY AND BASED ON AVAILABLE RECORDS AND FIELD OBSERVATIONS. CONTRACTOR IS RESPONSIBLE FOR CALLING 811 AT LEAST 48 HOURS PRIOR TO ANY EXCAVATION. CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS TO PROTECT EXISTING UTILITIES AND ANY DAMAGE TO THE UTILITIES SHALL BE IMMEDIATELY REPAIRED AT THE CONTRACTOR'S EXPENSE.

REVISION DATA

----	-----	
----	-----	
----	-----	
----	-----	

PROJECT NAME : D-HDT221

DRAWN BY: MASTEC

SHEET 21


TYPICAL HANDHOLE DETAILS

PERMITTING
AGENCY


CITY OF
DELTONA

SCALE: NONE

CONSTRUCTION DWG.

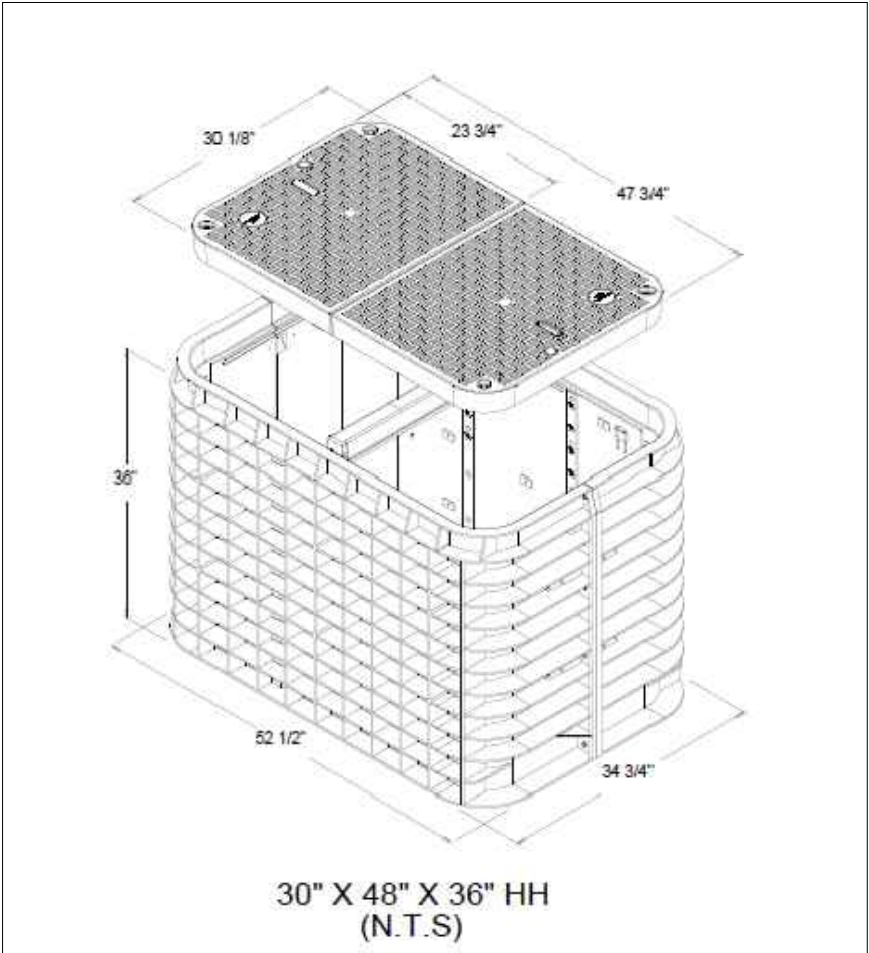

BODY SPECIFICATIONS	
Cover Weight (Split 1/2 Cover)	50 lbs [23 kg]
Pit Weight	129 lbs [59 kg]
Assembled Weight	229 lbs [105 kg]

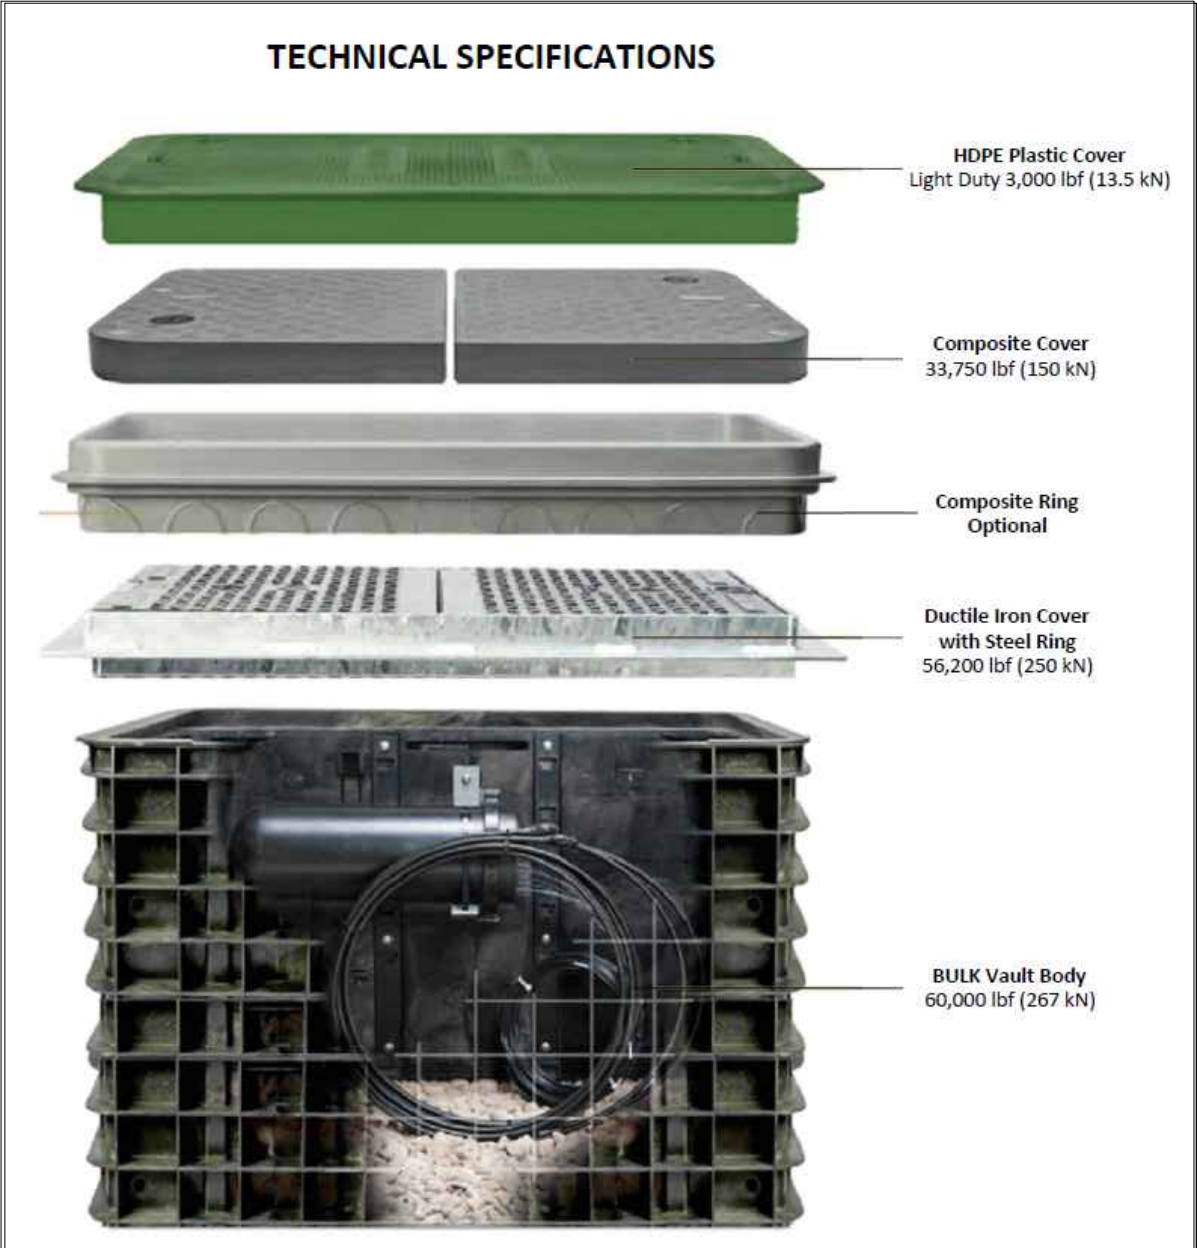

CALL 811 BEFORE YOU DIG.
FLORIDA TOLL FREE
800-432-4770



Tillman FiberCo.
Florida, LLC

MasTec
Communications Group

EXISTING UTILITIES SHOWN ARE APPROXIMATE ONLY AND BASED ON AVAILABLE RECORDS AND FIELD OBSERVATIONS. CONTRACTOR IS RESPONSIBLE FOR CALLING 811 AT LEAST 48 HOURS PRIOR TO ANY EXCAVATION. CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS TO PROTECT EXISTING UTILITIES AND ANY DAMAGE TO THE UTILITIES SHALL BE IMMEDIATELY REPAIRED AT THE CONTRACTOR'S EXPENSE.

REVISION DATA		
----	-----	
----	-----	
----	-----	
----	-----	
PROJECT NAME : D-HDT221		
DRAWN BY: MASTEC		SHEET 22


TOBY BOX DETAILS

PERMITTING
AGENCY

CITY OF
DELTONA

SCALE: NONE

CONSTRUCTION DWG.

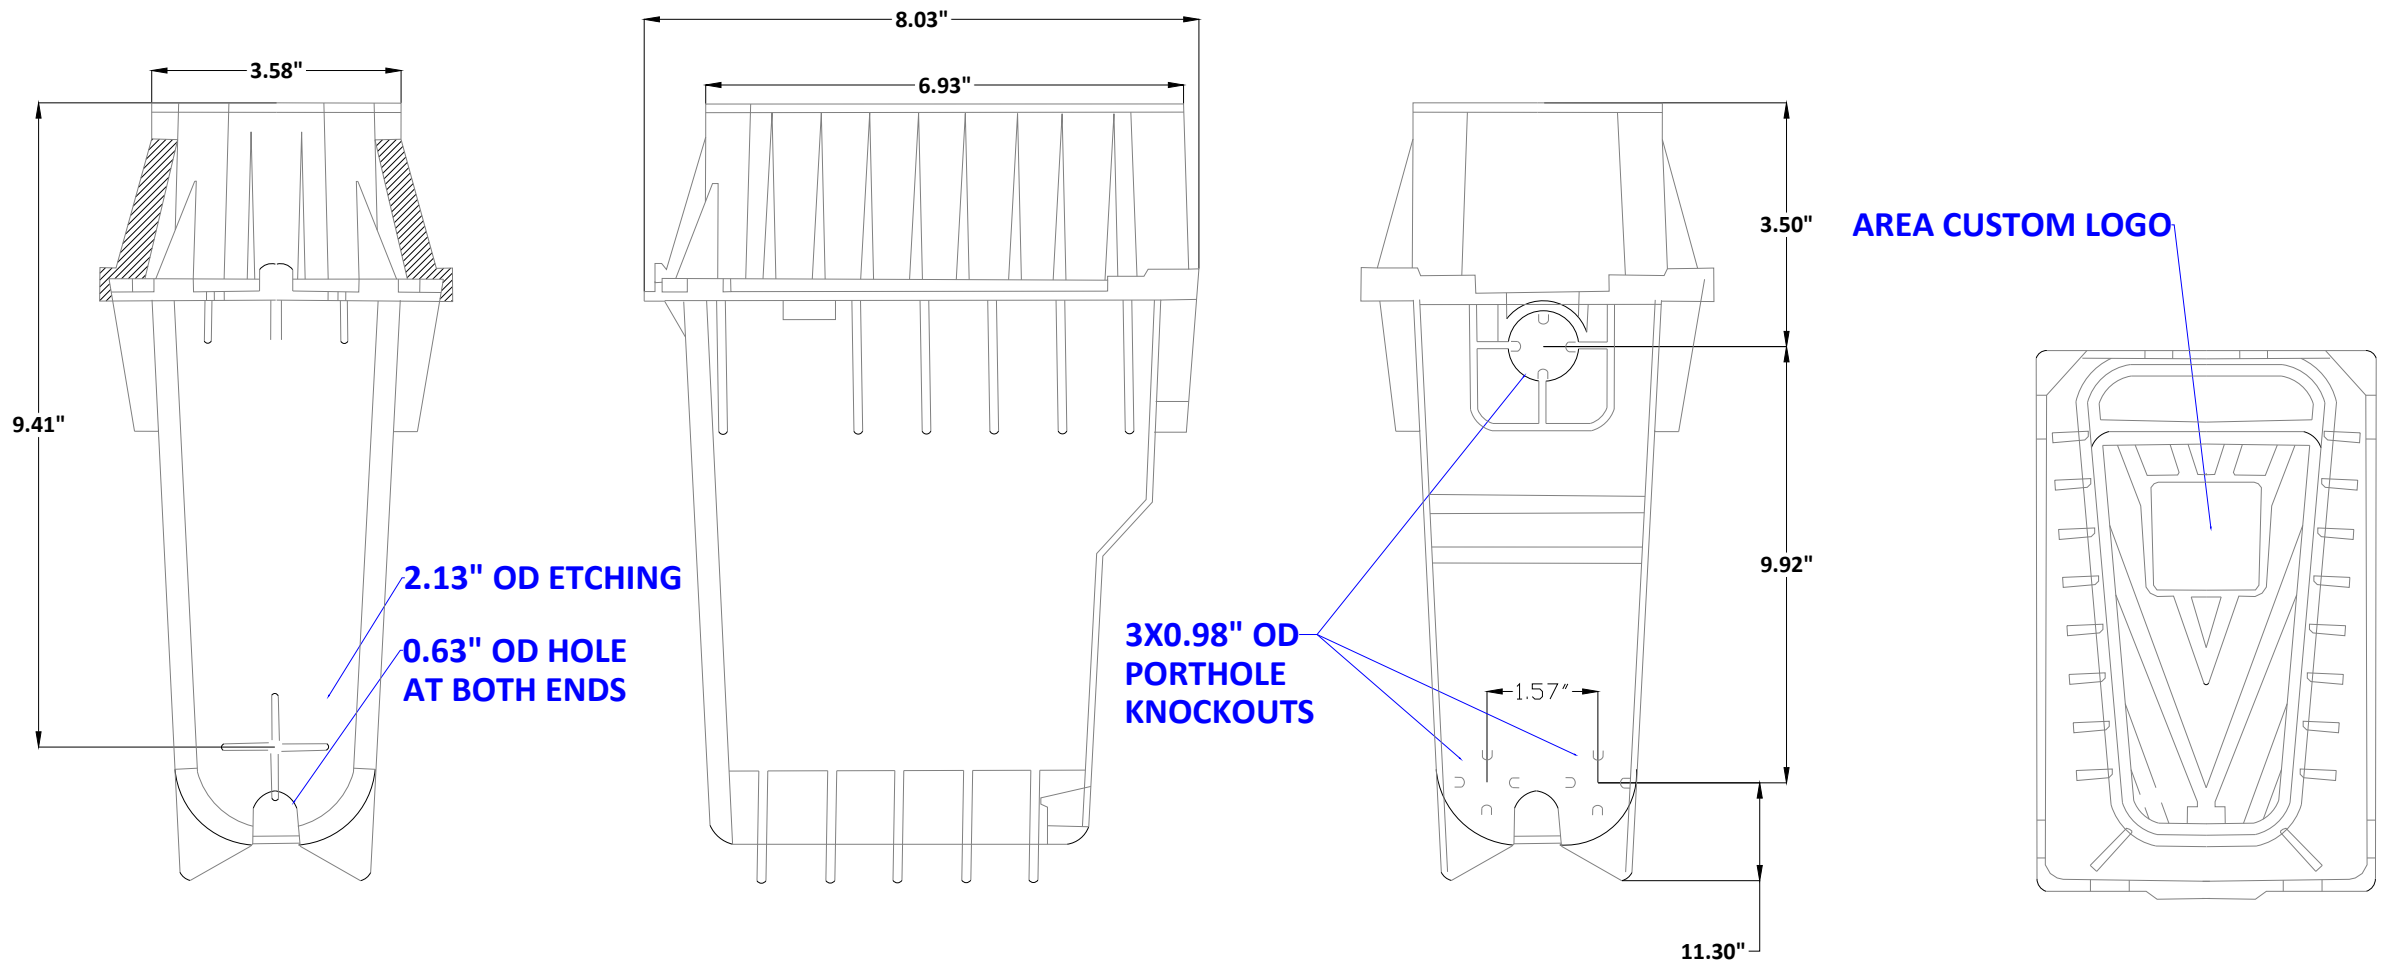

CALL 811 BEFORE YOU DIG.
FLORIDA TOLL FREE
800-432-4770



Tillman FiberCo.
Florida, LLC



EXISTING UTILITIES SHOWN ARE APPROXIMATE ONLY AND BASED ON AVAILABLE RECORDS AND FIELD OBSERVATIONS. CONTRACTOR IS RESPONSIBLE FOR CALLING 811 AT LEAST 48 HOURS PRIOR TO ANY EXCAVATION. CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS TO PROTECT EXISTING UTILITIES AND ANY DAMAGE TO THE UTILITIES SHALL BE IMMEDIATELY REPAIRED AT THE CONTRACTOR'S EXPENSE.

REVISION DATA		
----	-----	
----	-----	
----	-----	
----	-----	
PROJECT NAME : D-HDT221		
DRAWN BY: MASTEC		SHEET 23

TYPICAL BORE DETAIL


PERMITTING
AGENCY

CITY OF
DELTONA

SCALE: NONE

CONSTRUCTION DWG.

MINIMUM STANDARDS FOR BORING

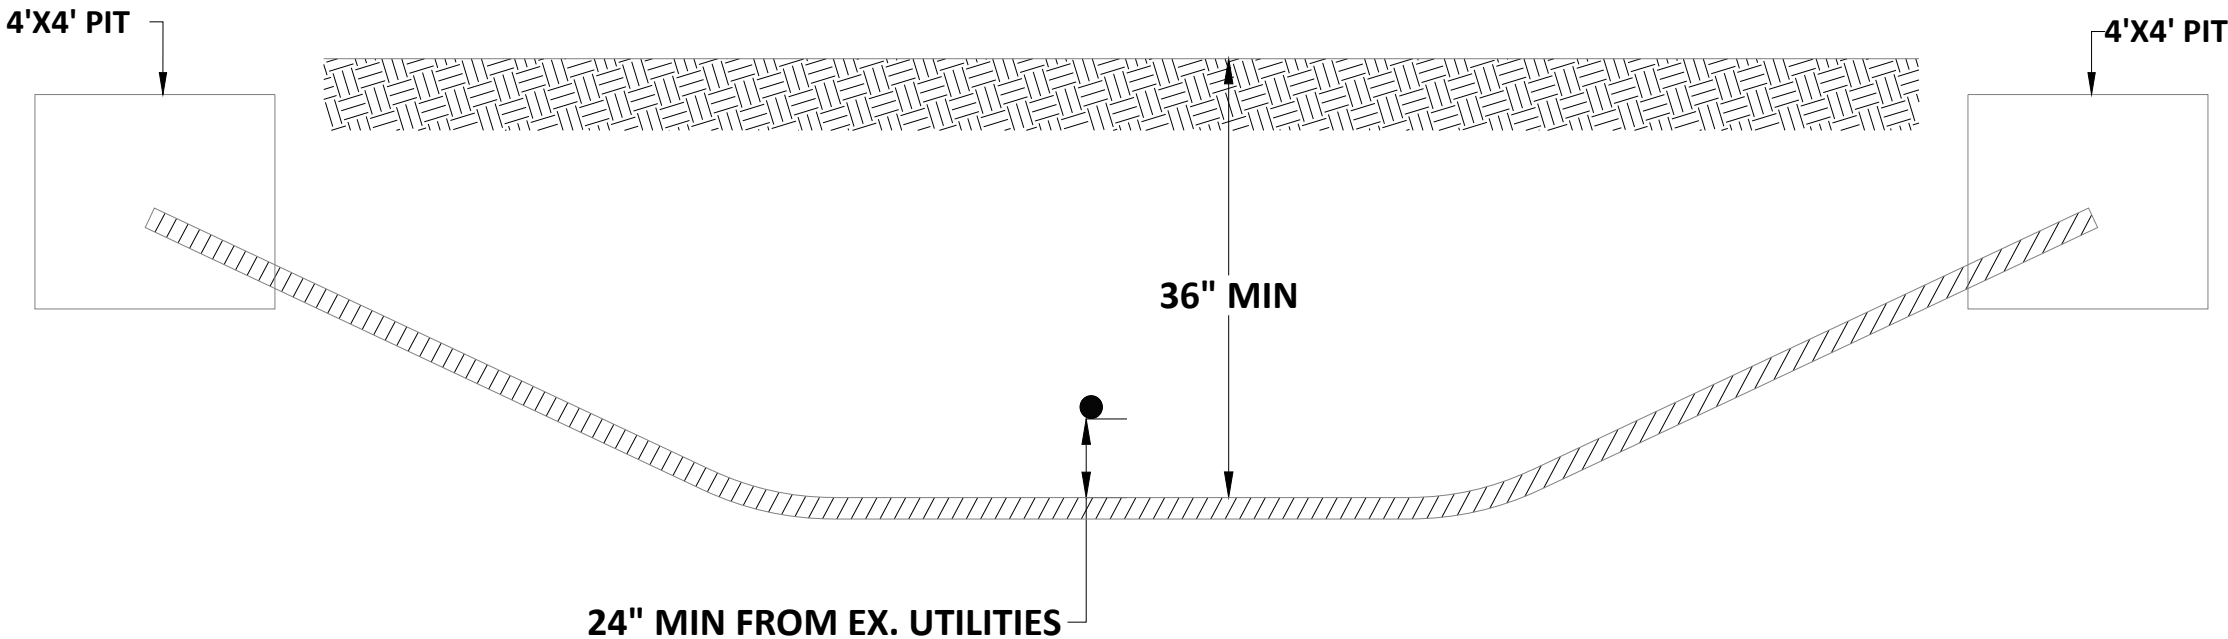

CALL 811 BEFORE YOU DIG.
FLORIDA TOLL FREE
800-432-4770



Tillman FiberCo.
Florida, LLC

MasTec
Communications Group

EXISTING UTILITIES SHOWN ARE APPROXIMATE ONLY AND BASED ON AVAILABLE RECORDS AND FIELD OBSERVATIONS. CONTRACTOR IS RESPONSIBLE FOR CALLING 811 AT LEAST 48 HOURS PRIOR TO ANY EXCAVATION. CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS TO PROTECT EXISTING UTILITIES AND ANY DAMAGE TO THE UTILITIES SHALL BE IMMEDIATELY REPAIRED AT THE CONTRACTOR'S EXPENSE.

REVISION DATA		
----	-----	
----	-----	
----	-----	
----	-----	
PROJECT NAME : D-HDT221		
DRAWN BY: MASTEC		SHEET 24

BILL OF MATERIALS					PERMITTING AGENCY CITY OF DELTONA	
BILL OF MATERIALS - COMPONENT BREAKDOWN					SCALE: NONE	
NETWORK ELEMENTS					CONSTRUCTION DWG.	
ITEM	PRODUCT NUMBER	DESCRIPTION	UOM	VALUE		
12F	KRPM258017/4000M	ABF Stingray 12x G657.A1 TIA598 PAN 4,000 meters	FT	1133		
24F	KRPM258017/4000M	ABF 24 200um G657.A1 PAN Stingray, 2,000 meters	FT	0		
48F	-	FIBER CABLE	FT	0		
96F	-	FIBER CABLE	FT	0		
288F	-	FIBER CABLE	FT	0		
FDH	-	HEXATRONICPRE-CONFIGURED UNDERGROUND FDH	COUNT	1		
SPLITTER(1:32 LCPE)		HEXATRONIC-MC-SPLITTER CARD, 1X32	EA	1		
UNDERGROUND INFRASTRUCTURE						
ITEM		DESCRIPTION	UOM	VALUE	 CALL 811 BEFORE YOU DIG. FLORIDA TOLL FREE 800-432-4770  Tillman FiberCo. Florida, LLC  MasTec Communications Group EXISTING UTILITIES SHOWN ARE APPROXIMATE ONLY AND BASED ON AVAILABLE RECORDS AND FIELD OBSERVATIONS. CONTRACTOR IS RESPONSIBLE FOR CALLING 811 AT LEAST 48 HOURS PRIOR TO ANY EXCAVATION. CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS TO PROTECT EXISTING UTILITIES AND ANY DAMAGE TO THE UTILITIES SHALL BE IMMEDIATELY REPAIRED AT THE CONTRACTOR'S EXPENSE.	
24"X36"X24" HH	-	TIER 18 BULK 24"X36"X24" DEEP	COUNT	0		
30"X48"X36" HH	-	TIER 22 BULK 30"X48"X36" DEEP	COUNT	1		
3.58"X8.03"X9.41"	HSBX-TBY-BOX-SQ21	Toby Box	COUNT	52		
1.5" CONDUIT	-	CONDUIT	FT	0		
HEX-2-WAY	MPB302782UV8	2x7/3.5 mm, TIA-598, feet marking, 6,560 feet reel with Tracer	FT	1568		
HEX-12-WAY	MPB3027812UV8	12x7/3.5 mm, TIA-598, feet marking, 6,560 feet reel with Tracer	FT	2202		
HEX-24-WAY	MPB3027824UV8	24x7/3.5 mm, TIA-598, feet marking, 6,560 feet reel with Tracer	FT	3591		
SPLICE DAP	-	SPLICE DAP	COUNT	70		
8" GROUND ROD	-	8" GROUND ROD	COUNT	1		
ROUTE SUMMARY						
ITEM		DESCRIPTION	UOM	VALUE	REVISION DATA	
PATH UG	-	PATH PLACEMENT UG (BORE)	FT	5807	----	-----
					----	-----
					----	-----
					----	-----
PATH UG	-	PATH PLACEMENT UG (TRENCH)	FT	515	PROJECT NAME : D-HDT221	
					DRAWN BY: MASTEC	SHEET 25